

aerospace  
 climate control  
 electromechanical  
 filtration  
 fluid & gas handling  
 hydraulics  
 pneumatics  
 process control  
 sealing & shielding



# Miniature Solenoid Valves

## Precision Fluidics



ENGINEERING YOUR SUCCESS.

# Innovative solutions for health care success




## ENGINEERING **YOUR** SUCCESS.

When you partner with the global leader in motion and control technologies, expect to move your business and the world forward. From miniature solenoid valves to highly integrated automation systems, our innovations are critical to life-saving medical devices and scientific instruments used for drug discovery and pathogen detection. Not to mention, critical to decreasing time to market and lowering your overall cost of ownership. So partner with Parker, and get ready to move, well, anything.



[www.parker.com/precisionfluidics](http://www.parker.com/precisionfluidics) 1 603 595-1500


# Table of Contents

	product	page
	<b>X-Valve®</b> Miniature 8 mm Pneumatic Solenoid Valve Designed for Portable and Stationary Applications Requiring a Small Footprint and Low Power Consumption	1
	<b>Series LX</b> Miniature 8 mm Latching Pneumatic Solenoid Valve Designed for Respiratory and Patient Therapy Applications Requiring a High Flow in a Small Footprint	8
	<b>Series MX</b> Miniature 10 mm Pneumatic Solenoid Valve Designed for Portable and Stationary Applications Requiring Highest Flow to Power Consumption Ratio Increasing Device Battery Life	15
	<b>C7</b> Miniature 7 mm Cartridge Pneumatic Solenoid Valve	25
	<b>C15</b> Miniature 15 mm Cartridge Pneumatic Solenoid Valve	36
	<b>C21</b> Miniature 21 mm Cartridge Pneumatic Solenoid Valve	47
	<b>Series 11</b> Miniature 15 mm Pneumatic Solenoid Valve Designed for Portable and Stationary Applications requiring Compact Integration and Long Life with Numerous Material and Pneumatic Connectivity Options	58
	<b>Series 25</b> Miniature 15 mm Pneumatic Solenoid Valve Designed for Portable and Stationary Applications requiring Long Life and Male Threaded Pneumatic Connectivity	66
	<b>Series 26</b> Miniature 15 mm Pneumatic Solenoid Valve Designed for Portable and Stationary Applications requiring Long Life, Compact Integration, and Female Threaded Pneumatic Connectivity	73
	<b>V<sup>2</sup></b> Miniature 15 mm Pneumatic Solenoid Valve Economical Valve Designed for Portable and Stationary Applications requiring Long Life and Minimal Weight	80
	<b>SRS</b> Miniature 10 mm Pneumatic Solenoid Valve Designed for Applications Requiring Low Power Consumption with Limited Manifold Space	86
	<b>PND Series</b> Miniature 10 mm Pneumatic Solenoid Valve Designed for Applications Requiring Rapid Pressure Relief and Fail Safe Operation	92
	<b>Pulse Valve</b> Miniature High Speed High Vacuum Dispense Valve Available With a Variety of Orifices, Seals, and Voltages to Match Your Application	96
	<b>Value Added</b> Application-Specific Solutions	103

# X-Valve®

## Miniature Pneumatic Solenoid Valve

### 8 mm Solenoid Valve

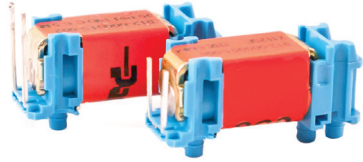

#### Applications

- Portable Equipment
- Blood Pressure Monitoring
- Wound Therapy
- Air and Oxygen Delivery
- Sensor Zeroing


#### Product Specifications

##### Mechanical

<b>Valve Type:</b>
3-Way, Solenoid-actuated poppet style - Universal (6 psig & 30 psig models) - Normally Closed (100 psig model) 2-Way Solenoid-actuated poppet style - Normally Closed, Bidirectional Flow (6 & 30 psig models) - Normally Closed, Directional Flow (100 psig model)
<b>Media:</b> Non-Reactive gases
<b>Operating Environment:</b>
32 to 122°F (0 to 50°C)
<b>Storage Temperature:</b>
-40 to 158°F (-40 to 70°C)
<b>Dimensions:</b>
- Length: 0.92 in (23.4 mm) - Width: 0.31 in (7.9 mm) - Height: 0.48 in (12.2 mm) to Barb End / 0.35 in (8.9 mm) to Manifold Face
<b>Spacing:</b>
0.315 in (8 mm) center
<b>Porting:</b>
- Barbs for 1/16 in (1.5 mm) I. D. Tubing, (1/32 in Wall Max.) - Manifold Mount (Gasket accessory required, see ordering info)
<b>Weight:</b> 0.16 oz (4.5 g)
<b>Internal Volume:</b>
0.0056 in <sup>3</sup> (0.092 cm <sup>3</sup> )

The X-Valve® is a miniature pneumatic solenoid valve measuring only 8 mm in width. The compact size, light weight and low power consumption of the X-Valve® is the ideal solution for portable applications and those applications with limited space and available power. The body construction of the X-Valve® is suited for manifold or barbed-tube pneumatic connections and is available in 2-way normally closed and 3-way universal configurations.

#### Features

- Direct PC and side-to-side mounting enables compact and efficient system design
- Large range of pressure options (6, 30 and 100 psi) to meet various application requirements
- Light weight valve construction is ideal for portable applications
- Available low power model (0.5 Watt) for continuous duty applications
- RoHS compliant 

#### Electrical

<b>Power Options:</b>
0.5 Watt (6 psig model) 1.0 Watt (30, 100 psig model)
<b>Voltage Options:</b>
3, 5, 12 or 24 VDC Further power reduction may be achieved through the use of spike and hold or PWM electrical control.
<b>Electrical Connections:</b>
PC Pins, 4 mm centers (all models) Lead Wire/Connector Assembly (Accessory, see ordering info)

#### Wetted Materials

<b>Bobbin/Body:</b>
PBT (Polybutylene terephthalate)
<b>Pole &amp; Plunger:</b>
430 FR Series Stainless Steel
<b>Seal (Options):</b>
FKM, EPDM, Silicone
<b>Other:</b>
302 Series Stainless Steel

#### Performance Characteristics

<b>Leak Rate: Tested with Air</b>
<0.016 sccm (6 psig Silicone) <0.016 sccm (30 psig FKM) <0.16 sccm (6 psig EPDM & FKM) <0.2 sccm (100 psig only)
<b>Response:</b>
< 20 ms maximum cycling (FKM, Silicone) < 50 ms maximum cycling (EPDM)
<b>Pressure/Vacuum:</b>
0 to 6 psid (0.4 bar differential) 0 to 30 psid (2.0 bar differential) 0 to 100 psid (6.9 bar differential)
<b>Proof Pressure:</b>
200 psig (13.7 bar)
<b>Minimum Flow:</b>
4 slpm @ 6 psid (0.4 bar differential) 6 slpm @ 30 psid (2.0 bar differential) 9 slpm @ 100 psid (6.9 bar differential)
<b>Orifice Sizes/Equivalent Cv:</b>
0.045" (1.14 mm) / 0.018 0.030" (0.75 mm) / 0.010 0.020" (0.5 mm) / 0.005
<b>Reliability:</b>
Life Cycle rating of 25 million (worst case tested, no performance degradation)




X-Valve is a registered trademark of Parker Hannifin Corporation.


# X-Valve® Miniature Pneumatic Solenoid Valve

## Typical Flow Curve


**All Models**  
(Tested w/air 24° C)

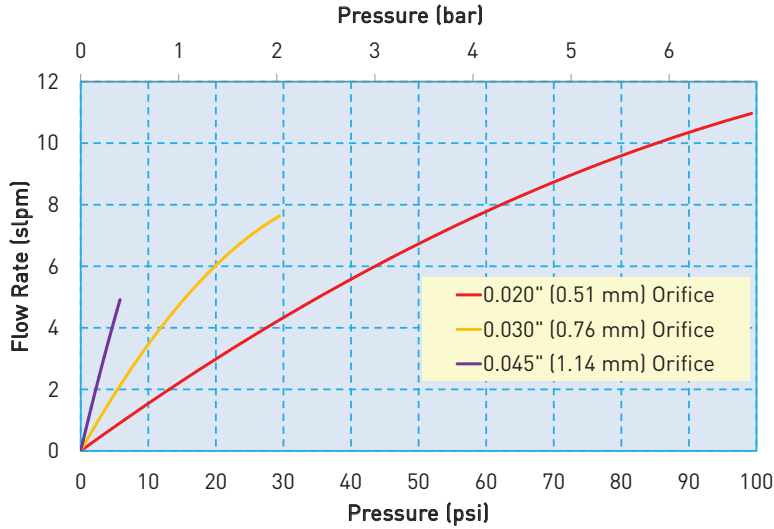


**Models 1 and 6 – 0.045" (1.14 mm) Orifice**

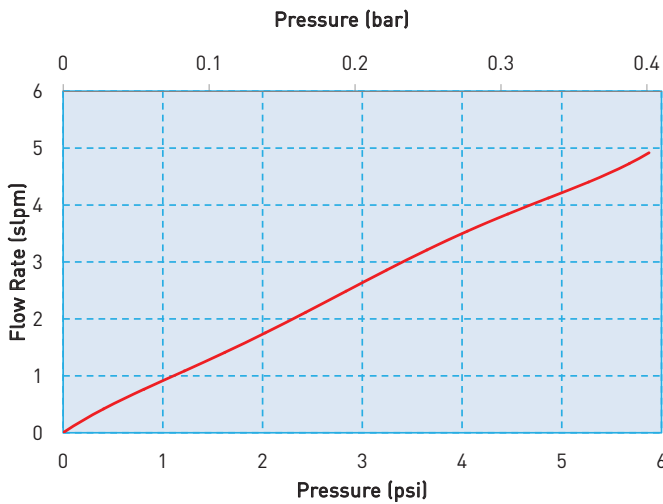

**Models 2 and 7 – 0.030" (0.76 mm) Orifice**

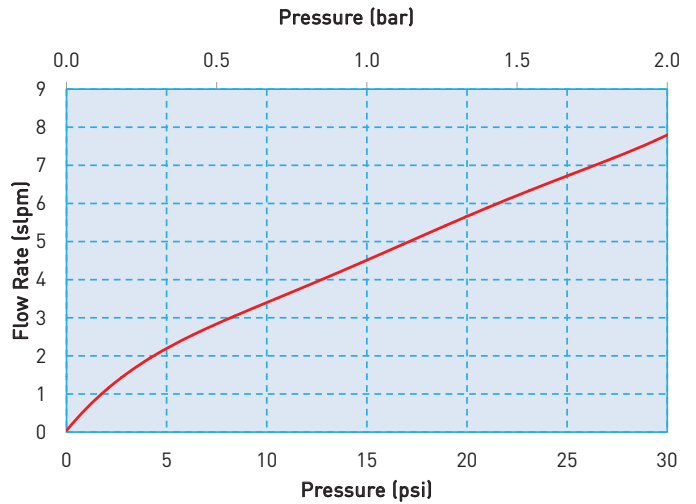

**Models 5 and 8 – 0.020" (0.51 mm) Orifice**

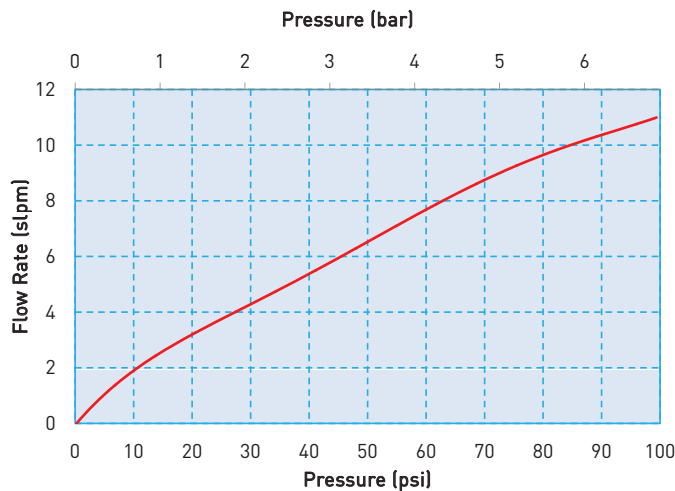

# X-Valve® Miniature Pneumatic Solenoid Valve

## Pressure and Flow Capabilities/Power

Model No.	Orifice Size	Nominal Cv	Maximum Operating Pressure Differential	Power Consumption Nominal
1 and 6	0.045 in (1.14 mm)	0.018	6 psi (0.4 bar differential)	0.5 Watt
2 and 7	0.030 in (0.76 mm)	0.010	30 psi (2.0 bar differential)	1 Watt
5 and 8	0.020 in (0.51 mm)	0.005	100 psi (6.9 bar differential)	1 Watt

\* Proof pressure is 200 psig (13.7 bar)

## Pneumatic Interface / Electrical Interface


### Short Pin

(For Pin/Wire Lead or PCB Terminal Housing Connection)  
[Reference Accessories section]




### Long Pin


(For Pin/PCB solder mount connection)



### Coil Connections

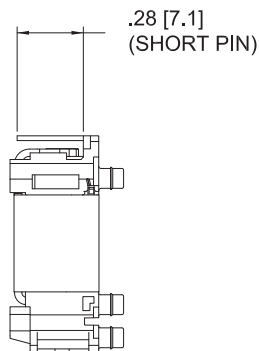


**Electrical Connection Options:**  
Electrical terminals compatible with Molex 51065 series connector or equivalent.

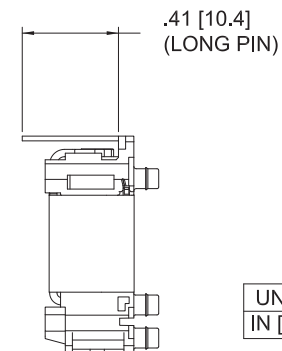

UNITS  
IN [MM]

## Mechanical Integration

### Dimensions

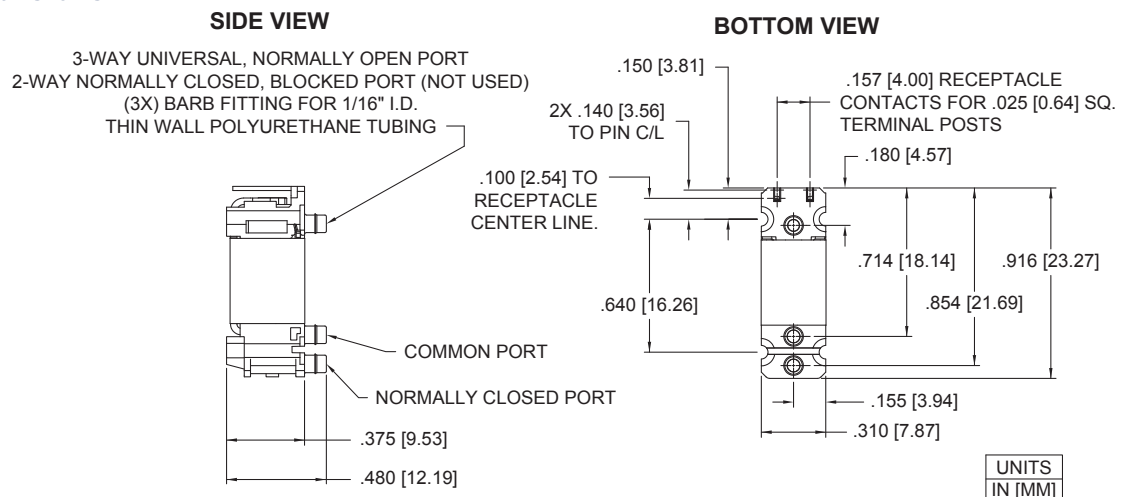


# X-Valve® Miniature Pneumatic Solenoid Valve

## ANSI Symbols

LEGEND:	
SUPPLY:	Pneumatic Source or Supply Pressure
EXHAUST:	Exhaust to Atmospheric Pressure
REQMT:	Customer Requirement or Application
ATM:	Atmospheric Pressure

### Pneumatic Schematics by Valve Types

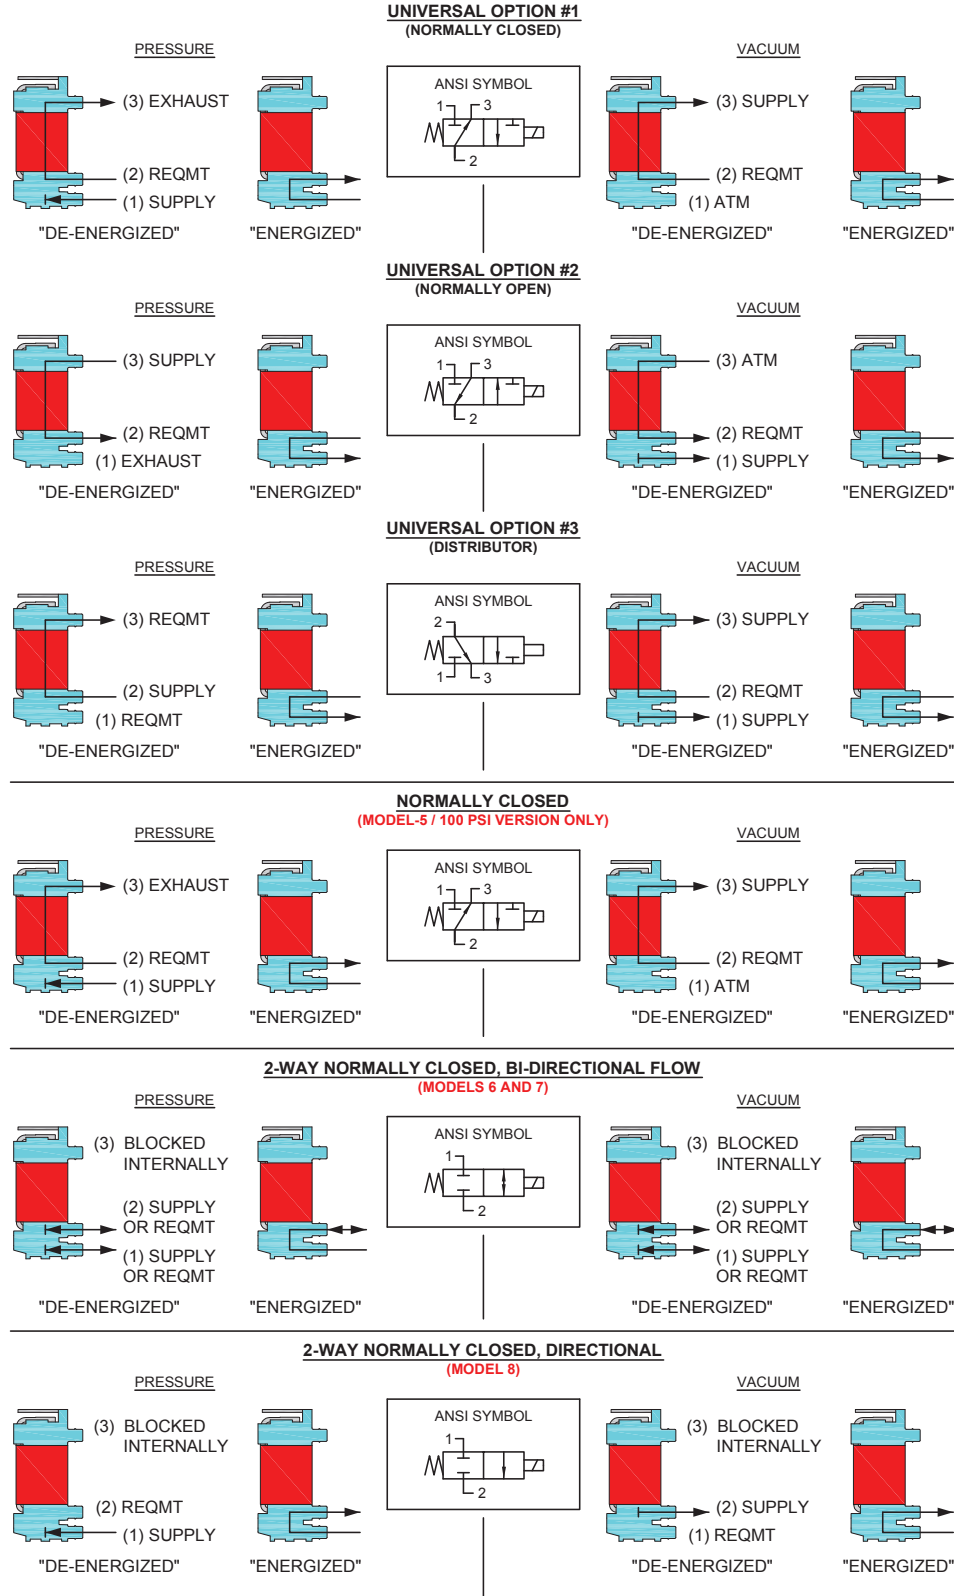


# X-Valve® Miniature Pneumatic Solenoid Valve


## Installation and Use

### X-Valve Manifold Mount Diagram

Parker Precision Fluidics recommends 3-5 in-oz of torque for the screws

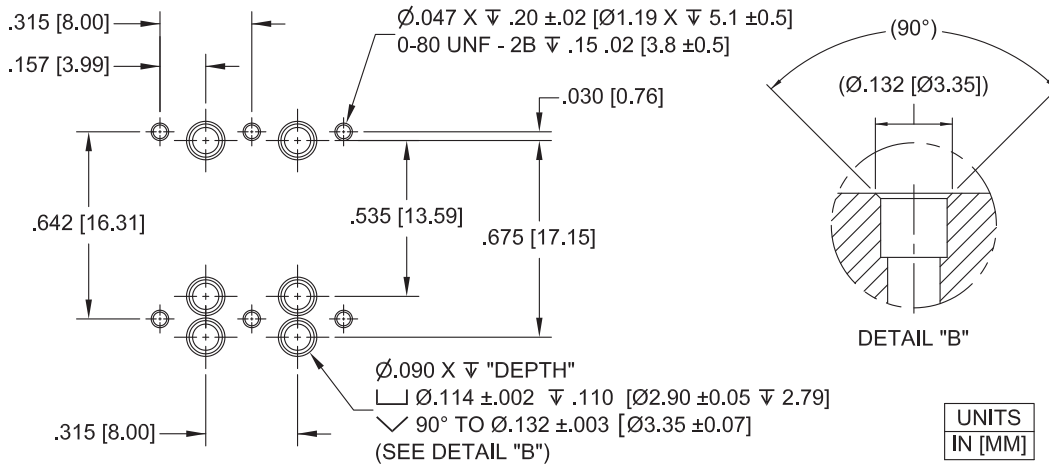

### Recommended X-Valve Manifold Dimensions

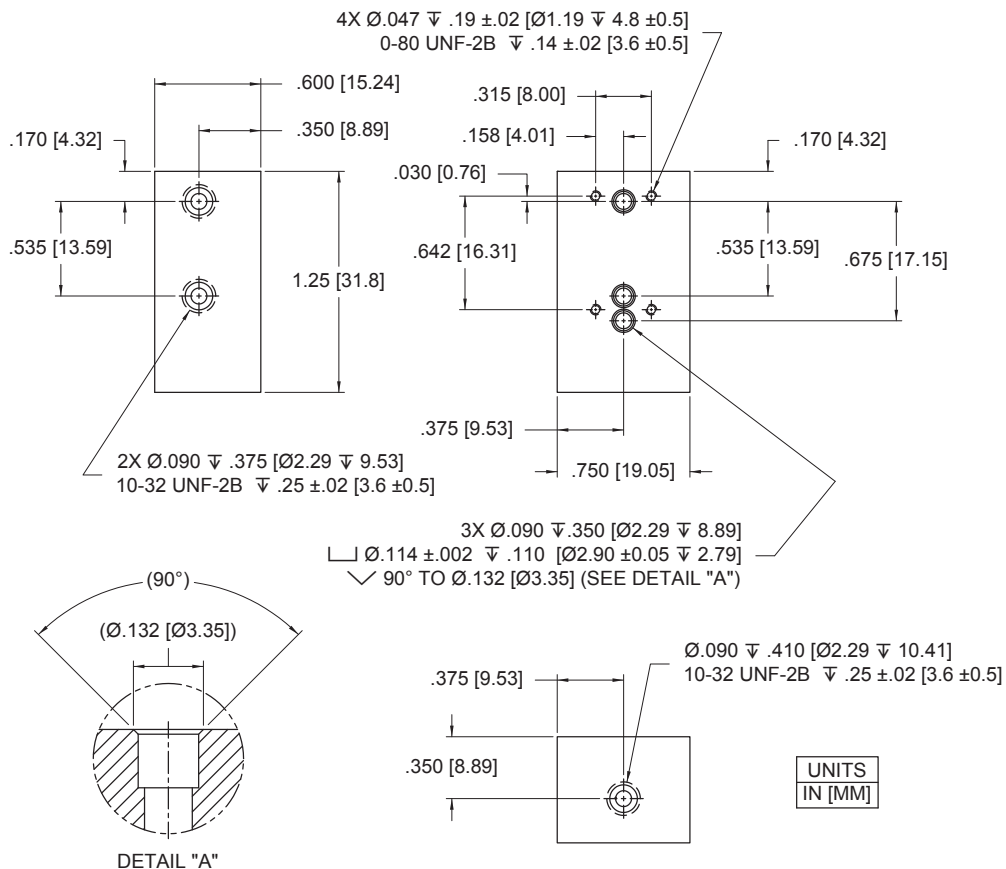




# X-Valve® Miniature Pneumatic Solenoid Valve

## Installation and Use

### Recommended X-Valve Mounting

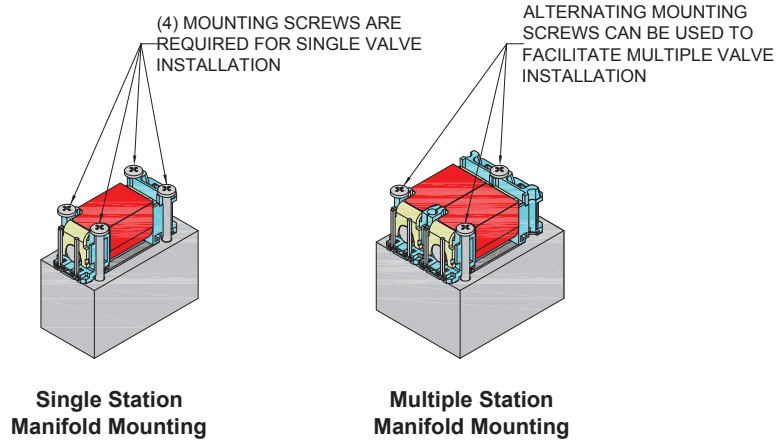

## Accessories

### Mounting Options

#### Manifold Rubber Gasket (FKM)

195-000159-001

(required for manifold mounting)

#### 12" Wire Leads

290-006061-001

(for use with Short Pin valve configuration)

#### Screw 0-80 x 1/2" Binding Head, Phillips


191-000100-208

(see valve mounting recommendations above)



#### Retention Pin PCB

190-006020-001

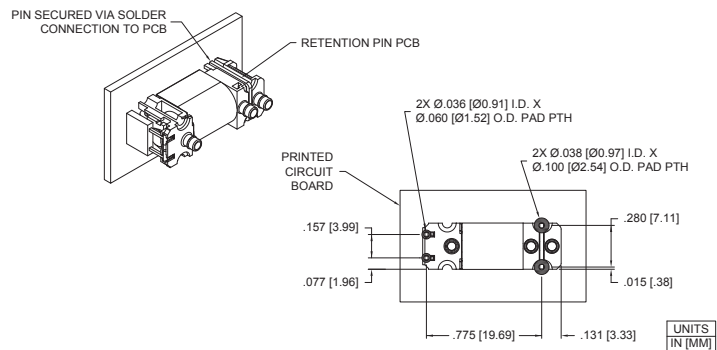

# X-Valve® Miniature Pneumatic Solenoid Valve

## Ordering Information

Sample Product ID	X	1	05	L	F
Description	Series	Model Number: Pressure / Orifice / Power / Type	Voltage	Electrical Coil Connection	Elastomer
Options	X	1: 6 psig / 0.045" / 0.5 Watt / 3-Way Universal 2: 30 psig / 0.030" / 1 Watt / 3-Way Universal 5: 100 psig / 0.020" / 1 Watt / 3-Way NC only 6: 6 psig / 0.045" / 0.5 Watt / 2-Way NC, Bi-Directional Flow <sup>(1)</sup> 7: 30 psig / 0.030" / 1 Watt / 2-Way NC, Bi-Directional Flow <sup>(1)</sup> 8: 100 psig / 0.020" / 1 Watt / 2-Way NC, Directional Flow <sup>(1)</sup>	03: 3 VDC 05: 5 VDC 12: 12 VDC 24: 24 VDC	S: Short Pins <sup>(2)</sup> L: Long Pins <sup>(3)</sup>	F: FKM E: EPDM (6 psig only) S: Silicone (6 psig only)
		<sup>(1)</sup> 2-Way NC configurations only available in FKM			
			<sup>(2)</sup> For Pin/Wire Lead or PCB Terminal Housing Connection		
			<sup>(3)</sup> For Pin/PCB solder mount connection		

Product ID Reference	Order Part Number	Product ID Reference	Order Part Number	Product ID Reference	Order Part Number
X-1-03-L-F	912-000001-001	X-1-05-S-F	912-000001-009	X-5-12-S-F	912-000001-019
X-1-12-L-F	912-000001-002	X-1-05-L-F	912-000001-010	X-5-24-S-F	912-000001-020
X-2-12-L-F	912-000001-003	X-2-03-S-F	912-000001-011	X-5-12-L-F	912-000001-021
X-2-24-L-F	912-000001-004	X-2-03-L-F	912-000001-012	X-5-24-L-F	912-000001-022
X-1-03-S-F	912-000001-005	X-5-03-S-F	912-000001-013	X-5-05-L-F	912-000001-031
X-1-12-S-F	912-000001-006	X-5-03-L-F	912-000001-014	X-5-05-S-F	912-000001-032
X-2-12-S-F	912-000001-007	X-1-24-S-F	912-000001-017	X-2-05-L-F	912-000001-033
X-2-24-S-F	912-000001-008	X-1-24-L-F	912-000001-018	X-2-05-S-F	912-000001-034



Product ID Reference	Order Part Number	Product ID Reference	Order Part Number	Product ID Reference	Order Part Number
X-6-03-L-F	912-000007-001	X-6-05-S-F	912-000007-009	X-8-12-S-F	912-000007-019
X-6-12-L-F	912-000007-002	X-6-05-L-F	912-000007-010	X-8-24-S-F	912-000007-020
X-7-12-L-F	912-000007-003	X-7-03-S-F	912-000007-011	X-8-12-L-F	912-000007-021
X-7-24-L-F	912-000007-004	X-7-03-L-F	912-000007-012	X-8-24-L-F	912-000007-022
X-6-03-S-F	912-000007-005	X-8-03-S-F	912-000007-013	X-8-05-L-F	912-000007-031
X-6-12-S-F	912-000007-006	X-8-03-L-F	912-000007-014	X-8-05-S-F	912-000007-032
X-7-12-S-F	912-000007-007	X-6-24-S-F	912-000007-017	X-7-05-L-F	912-000007-033
X-7-24-S-F	912-000007-008	X-6-24-L-F	912-000007-018	X-7-05-S-F	912-000007-034

Accessories	
195-000159-001: Rubber (FKM) Gasket <sup>(1)</sup>	<sup>(1)</sup> Not supplied with the valve. Used as a seal between the valve ports and manifold.
290-006061-001: 12" (30.5 cm) Wire Leads <sup>(2)</sup>	<sup>(2)</sup> Not supplied with the valve. Used to electrically interface with the valve.
190-006020-001: Retention Pin, PCB <sup>(3)</sup>	<sup>(3)</sup> Not supplied with the valve. Used to secure the valve for printed circuit board solder mounting.
191-000100-208: Screw, 0-80 x 1/2", Binding Head, Phillips <sup>(4)</sup>	<sup>(4)</sup> Not supplied with the valve. Four (4) screws are required for single station manifold valve mounting. See Recommended X-Valve Mounting for multiple station mounting screw requirements.

NOTE: In order to provide the best possible solution for your application, please provide the following requirements when contacting Applications Engineering:

- Media, Inlet & Outlet Pressures
- Minimum Required Flow Rate
- System Supply Voltage
- Media
- Ambient Temperature Range

Please click on the Order On-line button (or go to [www.parker.com/precisionfluidics/xvalve](http://www.parker.com/precisionfluidics/xvalve)) to configure your X-Valve Miniature Pneumatic Solenoid Valve. For more detailed information, visit us on the Web, or call and refer to Specification #790-002166-001 (3-Way, 6 and 30 psig), #790-002241-001 (3-Way, 100 psig), #790-002383-001 (2-Way, 6 psig), #790-002384-001 (2-Way, 30 psig), #790-002385-001 (2-Way, 100 psig) and drawing #890-003090-003 (Standard Pins) and #890-003090-004 (Long Pins).


For more information call +1 603 595 1500 or email [ppfinfo@parker.com](mailto:ppfinfo@parker.com)

Visit [www.parker.com/precisionfluidics](http://www.parker.com/precisionfluidics)



# Series LX-Valve Miniature Latching Pneumatic Solenoid Valve

## 8 mm Latching Solenoid Valve

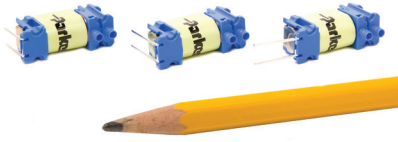

The Series LX-Valve is a miniature latching pneumatic solenoid valve measuring only 8 mm in width. The compact size, light weight, and power saving latching feature of the Series LX-Valve is the ideal solution for portable/battery powered applications. The body construction of the Series LX-Valve is suited for manifold or barbed-tube pneumatic connections and is available in a 2 way configuration.


### Markets

- Portable Medical Equipment
- Environmental Monitoring

### Applications

- Air & Oxygen Delivery

### Features

- Internal latching mechanism enables continuous, power free, operation with minimal/momentary actuation power to change states
- High flow output capability, (11 slpm Minimum @ 15 psid)
- Direct PC mounting and 11.2 mm valve mounting centers enables compact and lightweight system design
- RoHS and Reach compliant 

## Product Specifications

### Mechanical

<b>Valve Type:</b>
- 2-Way, 2-Position, Directional Flow, Latching
<b>Media:</b> Non-Reactive gases
<b>Operating Environment:</b>
32 to 122°F (0 to 50°C)
<b>Storage Temperature:</b>
-40 to 158°F (-40 to 70°C)
<b>Dimensions:</b>
- Length: 0.92 in (23.4 mm)
- Width: 0.31 in (7.9 mm)
- Height: 0.48 in (12.2 mm) to Barb End / 0.35 in (8.9 mm) to Manifold Face
<b>Spacing:</b> 0.440 in (11.2 mm) center (Minimum required to ensure proper latching operation)
<b>Porting:</b>
- Barbs for 1/16 in (1.5 mm) I. D. Tubing, (1/32 in Wall Max.)
- Manifold Mount (Gasket accessory required, see ordering info)
<b>Weight:</b> 0.16 oz (4.6 g)
<b>Internal Volume:</b>
0.0036 in <sup>3</sup> (0.060 cm <sup>3</sup> )

### Electrical

<b>Power Options (Momentary):</b>
0.52 Watt (6 psid model)
0.82 Watt (15 psid model)
<b>Voltage Options:</b>
3, 5, 12 or 24 VDC*
*minimum 20 millisecond pulse
<b>Electrical Connections:</b>
PC Pins, 4 mm centers (all models)
Lead Wire/Connector Assembly (Accessory, see ordering info)

### Wetted Materials


<b>Bobbin/Body:</b>
PBT (Polybutylene terephthalate)
<b>Pole &amp; Plunger:</b>
430 FR Series Stainless Steel
<b>Seal:</b>
FKM
<b>Other:</b>
302 Series Stainless Steel

### Performance Characteristics

<b>Leak Rate: Tested with Air</b>
< 0.20 sccm Internal
< 0.016 sccm External
<b>Response:</b>
< 20 ms
<b>Pressure/Vacuum:</b>
0 to 6 psid (0.4 bar differential)
0 to 15 psid (1.03 bar differential)
<b>Proof Pressure:</b>
200 psig (13.79 bar)
<b>Minimum Flow:</b>
6.0 slpm @ 6 psid (0.4 bar differential)
11.0 slpm @ 15 psid (1.03 bar differential)
<b>Orifice Size/Nominal Cv:</b>
0.045" (1.14 mm) / 0.028
<b>Reliability:</b>
Life Cycle rating of 10 million
Reliability .95 at 95% CI

## Series LX-Valve Miniature Latching Pneumatic Solenoid Valve

### Typical Flow Curve

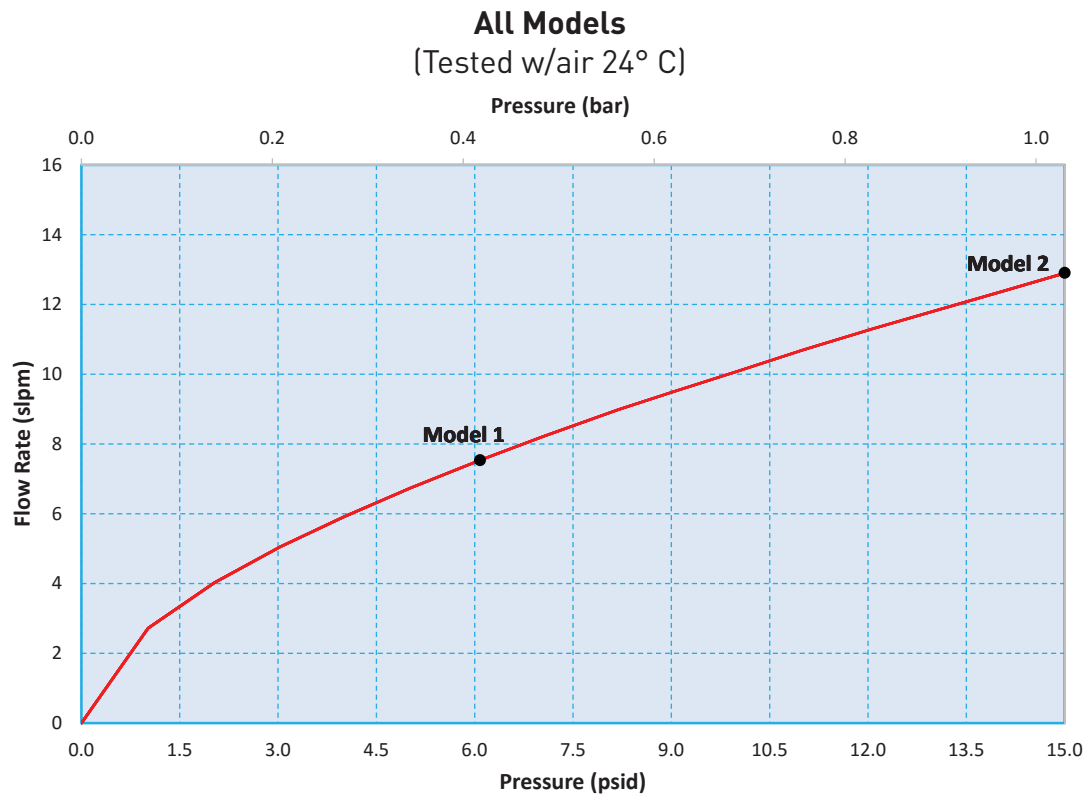

## Series LX-Valve Miniature Latching Pneumatic Solenoid Valve Pressure and Flow Capabilities

Model No.	Orifice Size	Nominal Cv	Maximum Operating Pressure Differential	Momentary Power (50 milliseconds)
1	0.045 in (1.14 mm)	0.028	6 psid (0.4 bar differential)	0.52 Watt
2	0.045 in (1.14 mm)	0.028	15 psid (1.03 bar differential)	0.82 Watt

\* Proof pressure is 200 psig (13.79 bar)

**Safety:** Proof Pressure: 200 PSIG (13.79 bar). Tests conducted at this pressure demonstrate that no loss of function or permanent damage occurs when returned within the specified operating pressure range.

**Caution:** Shock Resistance: This valve may change states when subjected to high shock conditions. (Contact application for more details). Validation testing should be conducted to ensure proper operation in the application.

### Electrical Interface

#### Short Pin

(For Pin/Wire Lead or PCB Terminal Housing Connection)

[Reference Accessories section]




#### Long Pin

(For Pin/PCB solder mount connection)




### Latching X-Valve Coil Connection




#### Electrical Connection Options:

Electrical terminals compatible with Molex 51065 series connector or equivalent.



### Latching X-Valve Polarity View

OPEN + -  
CLOSE - +



UNITS  
IN [MM]




# Series LX-Valve Miniature Latching Pneumatic Solenoid Valve


## Pneumatic Interface/Mechanical Integration

### Dimensions

**SIDE VIEW**




**BOTTOM VIEW**

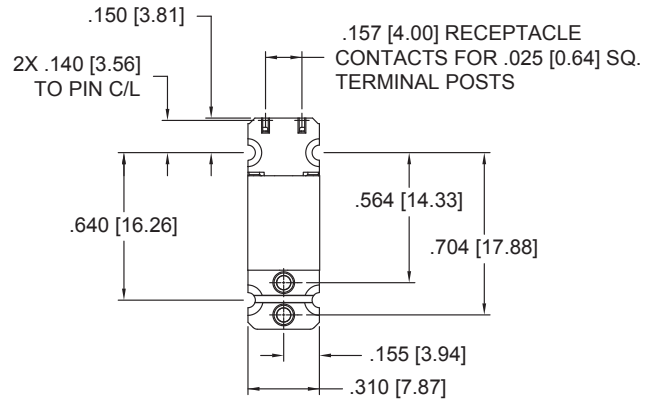


UNITS
IN [MM]

## ANSI Symbols

### Pneumatic Schematics by Valve Types

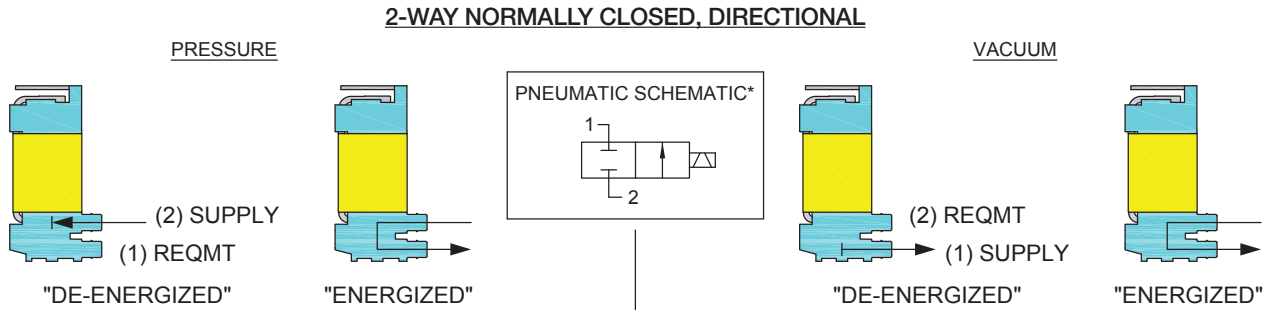


\* THE COIL SYMBOL, , REPRESENTS A SINGLE VALVE COIL WITH (2) POLARITY OPTIONS. REFERENCE THE "LATCHING X-VALVE POLARITY VIEW" SECTION, OF THIS DOCUMENT, FOR INFORMATION ON POLARITY ORIENTATION RELATIVE TO VALVE STATE.

LEGEND:	
SUPPLY:	Pneumatic Source or Supply Pressure
REQMT:	Customer Requirement or Application


# Series LX-Valve Miniature Latching Pneumatic Solenoid Valve Installation and Use

## LX-Valve Manifold Mount Diagram

Parker Precision Fluidics recommends 3-5 in-oz of torque for the screws

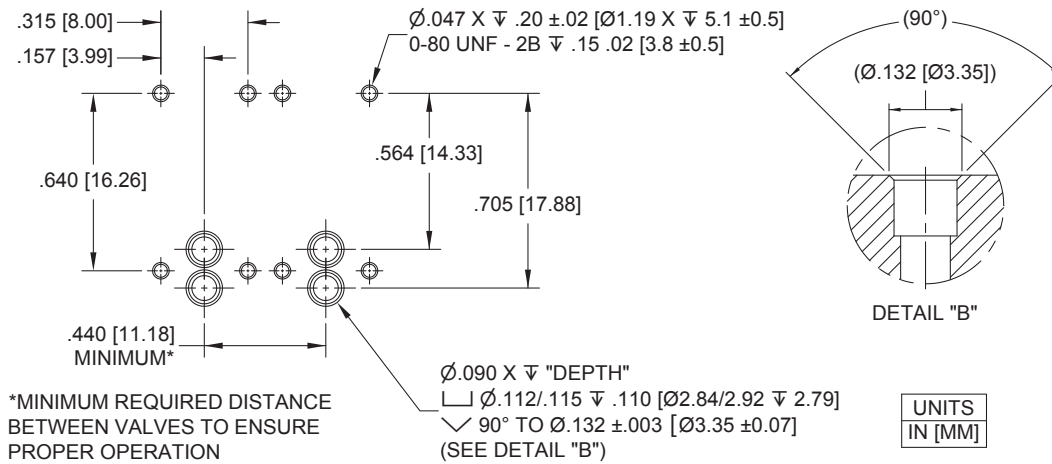

## Recommended LX-Valve Manifold Dimensions

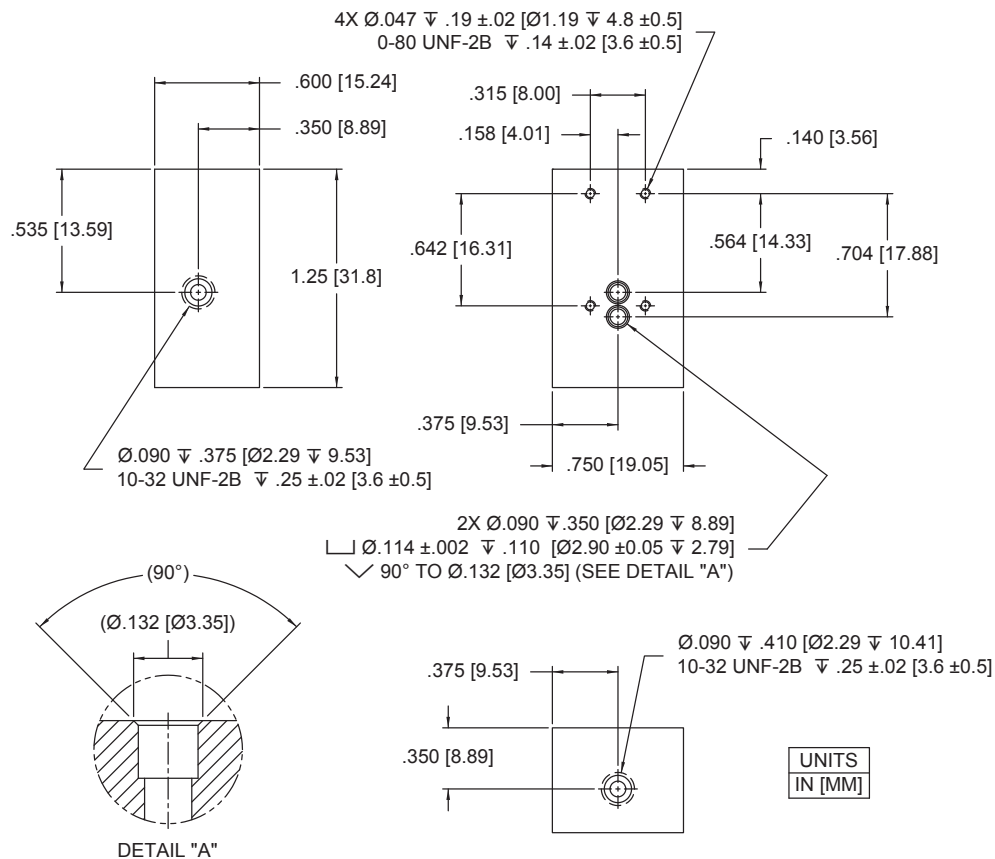


# Series LX-Valve Miniature Latching Pneumatic Solenoid Valve Installation and Use


## Recommended LX-Valve Mounting

(4) MOUNTING SCREWS REQUIRED FOR VALVE INSTALLATION

.440 [11.18] MINIMUM VALVE SPACING REQUIREMENT.



**Single Station Manifold Mounting**



**Multiple Station Manifold Mounting**

## Accessories

### Mounting Options

**Gasket, Manifold Mount (FKM)**  
195-000277-001  
(required for manifold mounting)





**12" Wire Leads**  
290-006061-001  
(for use with Short Pin valve configuration)



**Screw 0-80 x 1/2" Binding Head, Phillips**  
191-000100-208



**Retention Pin PCB**  
190-006020-001

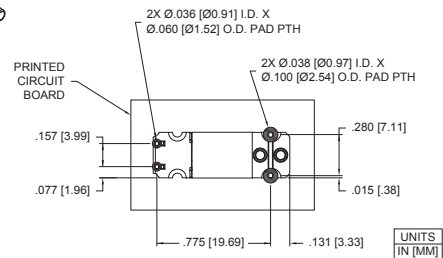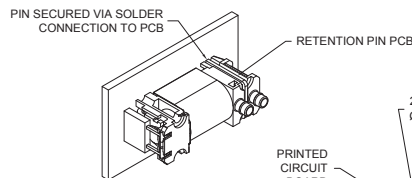



# Series LX-Valve Miniature Latching Pneumatic Solenoid Valve

## Ordering Information

Sample Product ID	LX	1	05	L	F	
Description	Series	Model Number: Pressure / Orifice / Type		Voltage <sup>(1)</sup>	Electrical Coil Connection	Elastomer
Options	LX	1: 6 psid / 0.045" / 2-Way Directional 2: 15 psid / 0.045" / 2-Way Directional		03: 3 VDC 05: 5 VDC 12: 12 VDC 24: 24 VDC	S: Short Pins <sup>(2)</sup> L: Long Pins <sup>(3)</sup>	F: FKM
				<sup>(1)</sup> Warning: The valve may change states when subjected to high shock conditions. Validation testing should be conducted to ensure proper operation in the application. Contact applications for more details.	<sup>(2)</sup> For Pin/Wire Lead or PCB Terminal Housing Connection	<sup>(3)</sup> For Pin/PCB solder mount connection

Product ID Reference	Order Part Number	Product ID Reference	Order Part Number	Product ID Reference	Order Part Number
LX-1-03-L-F	915-000001-001	LX-1-12-S-F	915-000001-007	LX-2-03-S-F	915-000001-013
LX-1-05-L-F	915-000001-002	LX-1-24-S-F	915-000001-008	LX-2-05-S-F	915-000001-014
LX-1-12-L-F	915-000001-003	LX-2-03-L-F	915-000001-009	LX-2-12-S-F	915-000001-015
LX-1-24-L-F	915-000001-004	LX-2-05-L-F	915-000001-010	LX-2-24-S-F	915-000001-016
LX-1-03-S-F	915-000001-005	LX-2-12-L-F	915-000001-011		
LX-1-05-S-F	915-000001-006	LX-2-24-L-F	915-000001-012		

Accessories	
195-000277-001: Gasket, Manifold Mount (FKM) <sup>(1)</sup>	<sup>(1)</sup> Not supplied with the valve. Used as a seal between the valve ports and manifold.
290-006061-001: 12" (30.5 cm) Wire Leads <sup>(2)</sup>	<sup>(2)</sup> Not supplied with the valve. Used to electrically interface with the valve.
190-006020-001: Retention Pin, PCB <sup>(3)</sup>	<sup>(3)</sup> Not supplied with the valve. Used to secure the valve for printed circuit board solder mounting.
191-000100-208: Screw, 0-80 x 1/2", Binding Head, Phillips <sup>(4)</sup>	<sup>(4)</sup> Not supplied with the valve. Four (4) screws are required for single station manifold valve mounting. See Recommended LX-Valve Mounting for multiple station mounting screw requirements.

NOTE: In order to provide the best possible solution for your application, please provide the following requirements when contacting Applications Engineering:

- Media, Inlet & Outlet Pressures
- Minimum Required Flow Rate
- System Supply Voltage
- Media
- Ambient Temperature Range




Please click on the Order On-line button (or go to [www.parker.com/precisionfluidics/lxvalve](http://www.parker.com/precisionfluidics/lxvalve)) to configure your LX-Valve Miniature Latching Pneumatic Solenoid Valve. For more detailed information, visit us on the Web, or call and refer to Performance Specification #790-002454-001, Outline Drawing #890-003377-001 (Short Pin), Outline Drawing #890-003377-002 (Long Pin).

For more information call +1 603 595 1500 or email [ppfinfo@parker.com](mailto:ppfinfo@parker.com)  
Visit [www.parker.com/precisionfluidics](http://www.parker.com/precisionfluidics)



# Series MX Miniature Pneumatic Solenoid Valve

## 10 mm Solenoid-Actuated Poppet Valve



### Markets


- Respiratory
- Patient Therapy

### Applications

- Oxygen Concentrators
  - Sieve bed switching/equalization
  - Oxygen delivery
- Deep Vein Thrombosis
  - Cuff Inflation/Deflation Control
- Negative Pressure Wound Therapy
  - High Volume Vacuum/Pressure Control

The Series MX is a miniature solenoid valve that delivers high flow at low pressure in a compact, 10 mm wide size. Using hit and hold control, the Series MX miniature solenoid consumes very little power helping medical device manufacturers increase battery life and reduce system weight without sacrificing performance. The universal design supports manifold or barbed-tube mounting and is available in 2-way and 3-way configurations. The Series MX solenoid valve is an ideal solution for portable medical devices with limited space and power.

### Features

- Small, 10 mm size enables compact integration and reduces device size
- Highest flow to power consumption ratio increases device battery life
- Lightweight 0.3 oz (8.5 g) design helps reduce portable device weight
- Universal barbed-tube or manifold mount eases valve integration
- CE and RoHS compliant 

## Product Specifications

### Mechanical

<b>Valve Type:</b>
Solenoid-Actuated Poppet Style
- 2 and 3-Way Normally Closed (NC)
- 2 and 3-Way Normally Open (NO)
- 3-Way Distributor
<b>Media:</b> Non-Reactive gases
<b>Operating Environment:</b>
41 to 122°F (5 to 50°C)
<b>Storage Temperature:</b>
-40 to 158°F (-40 to 70°C)
<b>Dimensions:</b>
- Length: 1.50 in (38.1 mm)
- Width: 0.40 in (10.1 mm)
- Height: 0.62 in (15.7 mm)
to Barb End / 0.44 in (11.1 mm)
to Manifold Face
<b>Valve to Valve Spacing:</b>
0.400 in (10 mm) center
<b>Porting:</b>
- Barbs for 3/32 in (2 mm)
I. D. Tubing
- Manifold Mount
<b>Weight:</b> 0.3 oz (8.5 g)
<b>Internal Volume:</b>
0.01247 in <sup>3</sup> (0.2043 cm <sup>3</sup> )
<b>Filtration:</b>
40 micron recommended

### Electrical

<b>Power Options (Hit/Hold):</b>
6 psid model (1.0/0.25 Watt)
15 psid model (2.0/0.5 Watts)
30 psid model (3.0/0.75 Watts)
<b>Voltage Options:</b>
5, 12 or 24 VDC
Series MX Model 7 is not rated for continuous duty and must employ hit and hold control.
<b>Electrical Connections:</b>
2-Pin PCB (for PCB solder connection)
2-Pin Up (for connector interface)
0.30 in (7.6 mm) pin centers
(Lead Wire/Connector Assembly available, see ordering information)

### Wetted Materials

<b>Body/Plunger:</b>
PPE/PA
(Polyphenylene Ether/Polyamide)
<b>Armature:</b>
430 FR Series Stainless Steel
<b>Seal (Options):</b>
Silicone (6 PSI Only), FKM
<b>Other:</b>
302/304 Series Stainless Steel
EPDM (Manifold Gasket)


### Performance Characteristics

<b>Leak Rate: Tested with Air</b>
<0.2 sccm
<b>Response:</b>
< 20 ms maximum cycling
<b>Pressure/Vacuum:</b>
0 to 6 psid (0.4 bar differential)
0 to 15 psid (1.0 bar differential)
0 to 30 psid (2.0 bar differential)
<b>Proof Pressure:</b>
100 psig (6.9 bar)
<b>Typical Flow:</b>
17.5 slpm @ 6 psid
(0.4 bar differential)
30 slpm @ 15 psid
(1.0 bar differential)
48 slpm @ 30 psid
(2.0 bar differential)
<b>Orifice Sizes/Equivalent Cv:</b>
0.075 in (1.91 mm) / 0.072
<b>Reliability:</b>
Life Cycle rating of 25 million
(worst case tested)


## Series MX Miniature Pneumatic Solenoid Valve

### Typical Flow Curve


**6 PSID Model**  
(Tested w/air 20° C)

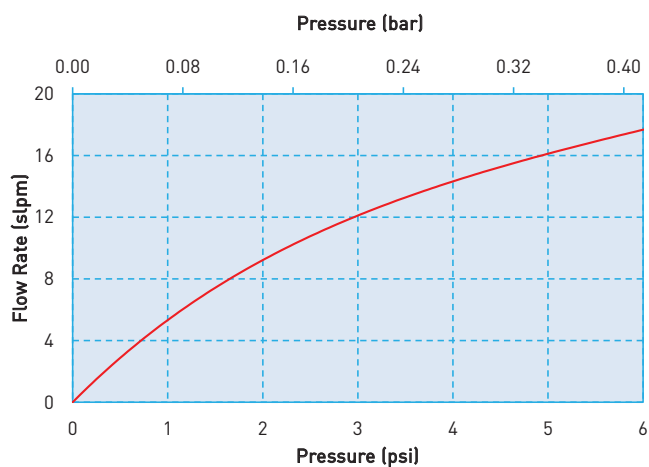

**15 PSID Model**  
(Tested w/air 20° C)

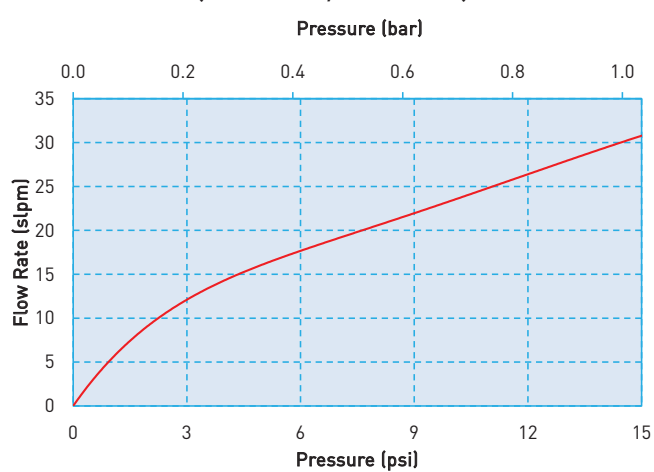

**30 PSID Model**  
(Tested w/air 20° C)

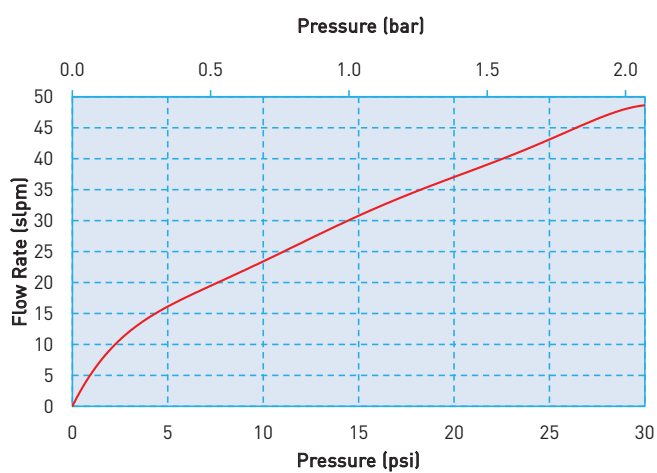

## Series MX Miniature Pneumatic Solenoid Valve Pressure and Flow Capabilities

Model No.	Orifice Size	Maximum Operating Pressure Differential	Typical Flow at Rated Pressure	Nominal Cv
7	0.075 in (1.9 mm)	6 psid (0.4 bar)	17.5 slpm	0.062
		15 psid (1.0 bar)	30 slpm	0.068
		30 psid (2.0 bar)	48 slpm	0.072

### Electrical Interface

#### 2 Pin-PCB

(For Pin/PCB solder mount connection)


#### 2 Pin-Up

(For Pin/Wire Lead or PCB Terminal Housing Connection)  
[Reference Accessories section]




### Coil Connections

#### 2 PIN-PCB

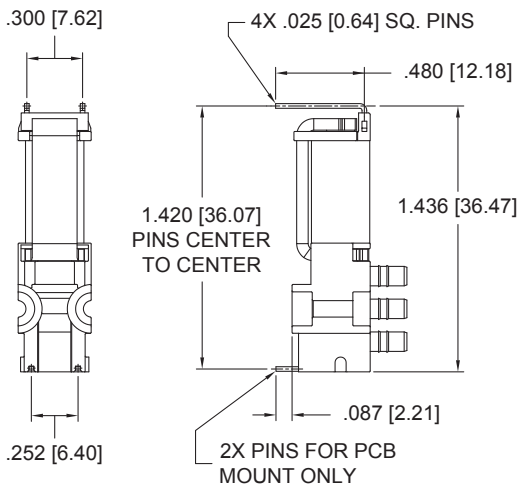

#### 2 PIN-UP

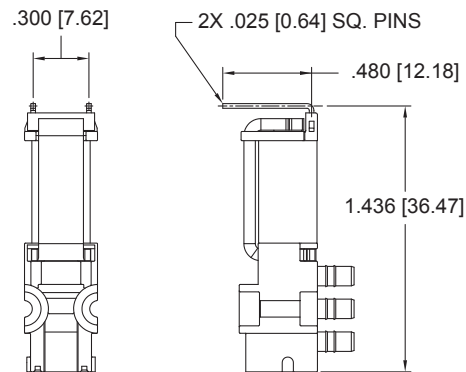

UNITS  
IN [MM]

### Electrical Connection Options:

Electrical terminals compatible with Molex 0511910400 (4 Position) Connector and Molex 0508029101 Crimp Terminal or equivalent.

## Series MX Miniature Pneumatic Solenoid Valve

### Electrical Requirements

#### 6 PSI Version

Actuation Voltage Minimum of 50 msec* (VDC $\pm$ 5%)	Minimum Hold Voltage (VDC)	Hold Power, Typical @ 20°C (Watts)	Resistance @ 20°C (Ohms $\pm$ 5%)
5	2.5	0.25	24.5
12	6	0.25	145
24	12	0.25	567

\* Valve is not rated for continuous duty at rated in-rush voltage. Recommended minimum actuation time is 50 milliseconds. Actuation voltage time must not exceed 20 seconds.

#### 15 PSI Version

Actuation Voltage Minimum of 50 msec* (VDC $\pm$ 5%)	Minimum Hold Voltage (VDC)	Hold Power, Typical @ 20°C (Watts)	Resistance @ 20°C (Ohms $\pm$ 5%)
5	2.5	0.50	12.5
12	6	0.50	71
24	12	0.50	285

\* Valve is not rated for continuous duty at rated in-rush voltage. Recommended minimum actuation time is 50 milliseconds. Actuation voltage time must not exceed 20 seconds.

#### 30 PSI Version


Actuation Voltage Minimum of 50 msec* (VDC $\pm$ 5%)	Minimum Hold Voltage (VDC)	Hold Power, Typical @ 20°C (Watts)	Resistance @ 20°C (Ohms $\pm$ 5%)
5	2.5	0.75	8
12	6	0.75	50
24	12	0.75	180

\* Valve is not rated for continuous duty at rated in-rush voltage. Recommended minimum actuation time is 50 milliseconds. Actuation voltage time must not exceed 20 seconds.


## Series MX Miniature Pneumatic Solenoid Valve

### Pneumatic Integration


#### 2-WAY NORMALLY CLOSED

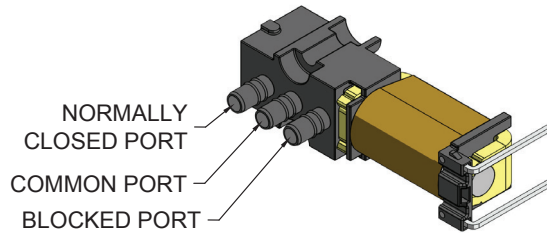

#### 2-WAY NORMALLY OPEN

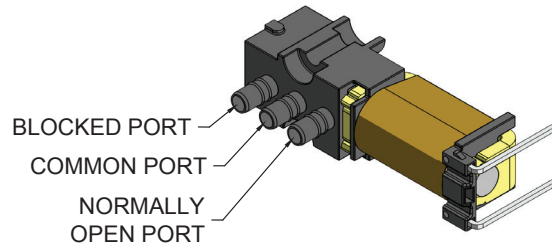


#### 3-WAY NC, NO AND DISTRIBUTOR

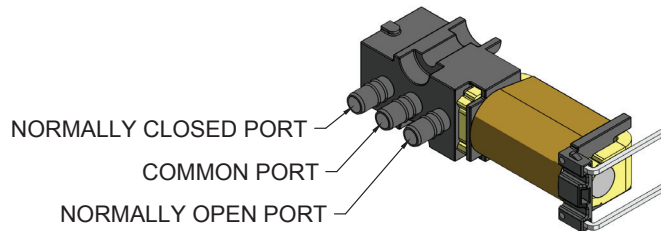


## Mechanical Integration

#### SIDE VIEW

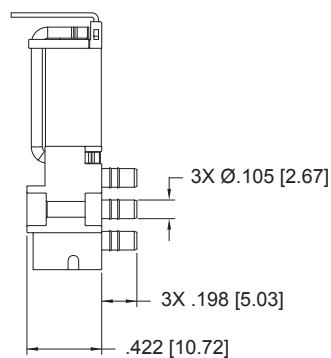

#### BOTTOM VIEW

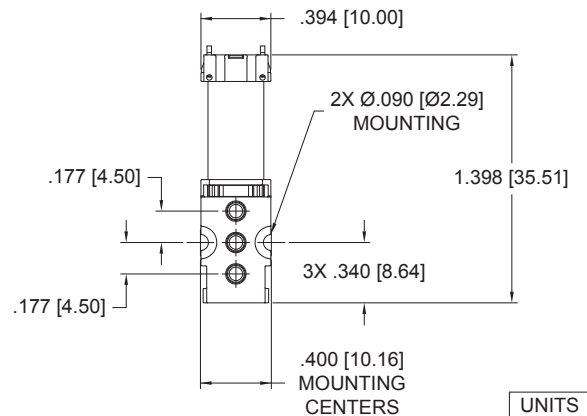

## Mounting Requirements

Mounting Screw Sizes (Pan Head Machine Screw)*	Mounting Screw Torque
2-56 x 1/2"	10 to 12 in-oz
M2 x 14 mm	0.07 to 0.08 N-m


\*Mounting screws are not provided with the valve. See Accessories

# Series MX Miniature Pneumatic Solenoid Valve

## ANSI Symbols

LEGEND:	
SUPPLY:	Pneumatic Source or Supply Pressure
EXHAUST:	Exhaust to Atmospheric Pressure
REQMT:	Customer Requirement or Application
ATM:	Atmospheric Pressure

### Pneumatic Schematics by Valve Types

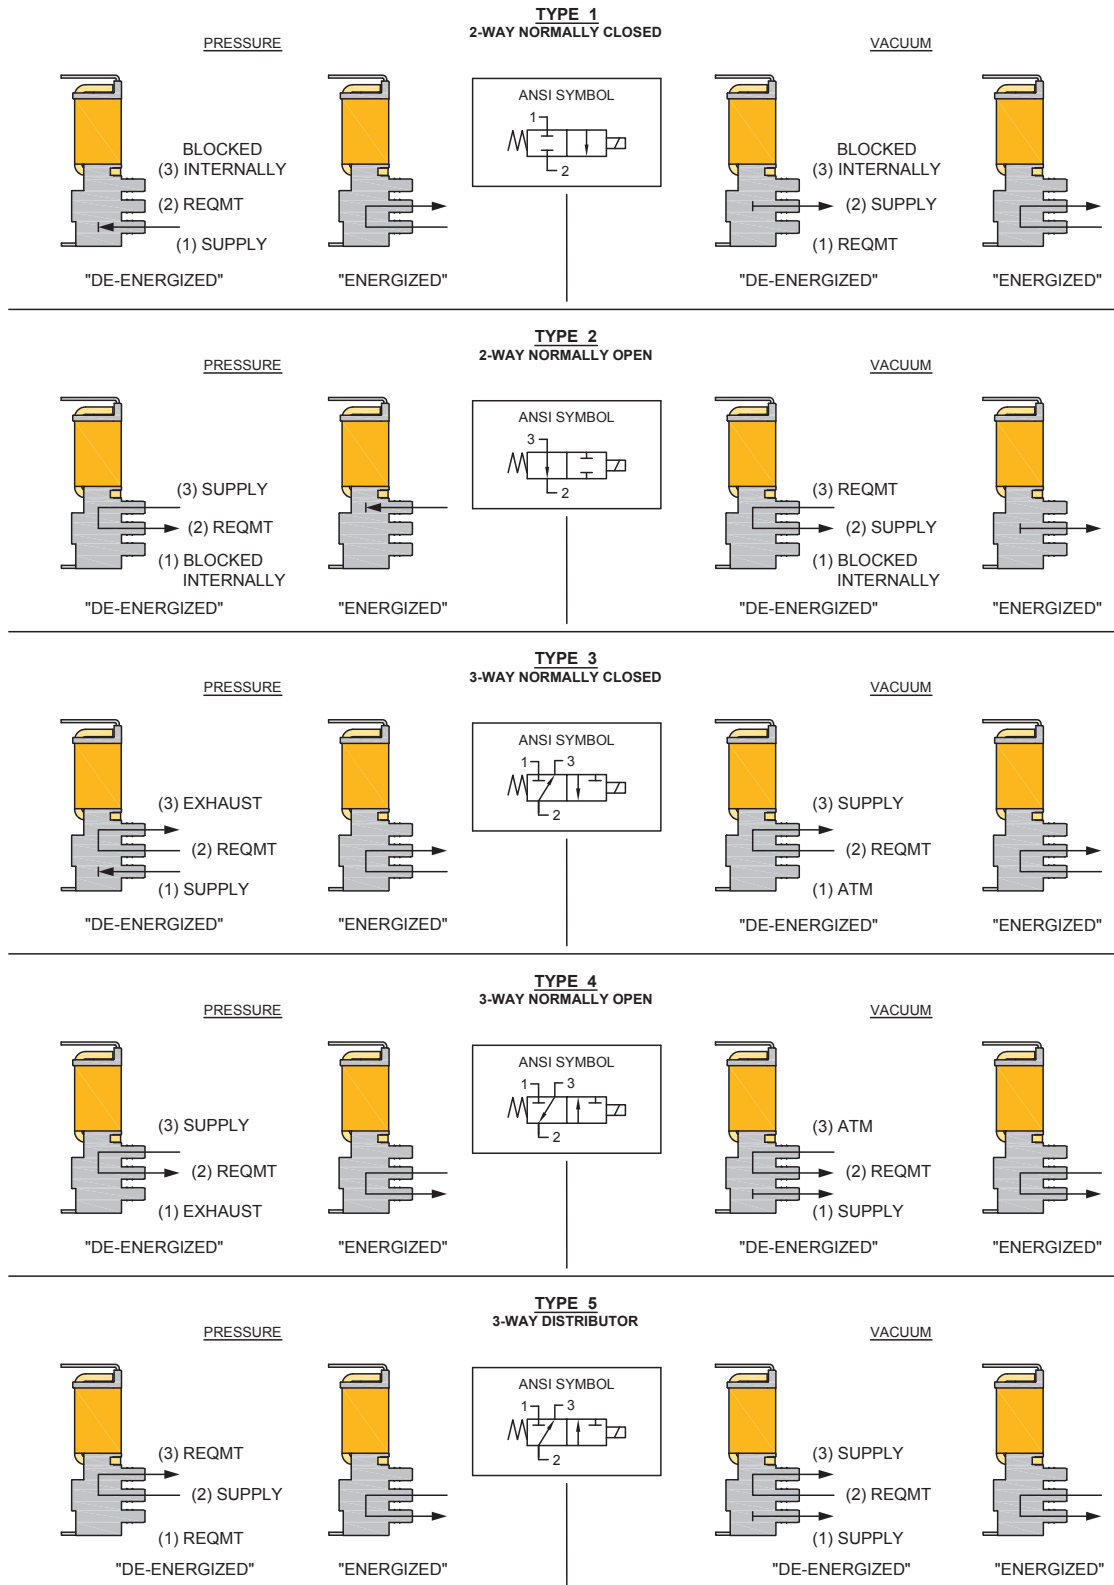

## Series MX Miniature Pneumatic Solenoid Valve


### Installation and Use

#### Hit and Hold Specifications

The Series MX valve is designed for use with “Hit and Hold” control.

Hit and Hold is a common control method used to reduce component power consumption without sacrificing performance. The “Hit” or “Spike” state refers to the rated voltage required to actuate the valve. The “Hold” state is a substantial reduction in the rated voltage (normally 50% of the rated voltage) that maintains the valve in an actuated state.

Hit and Hold control can be incorporated using several different approaches, including discrete component circuits or programmable logic. The graph below illustrates the typical “Hit” and “Hold” control method.

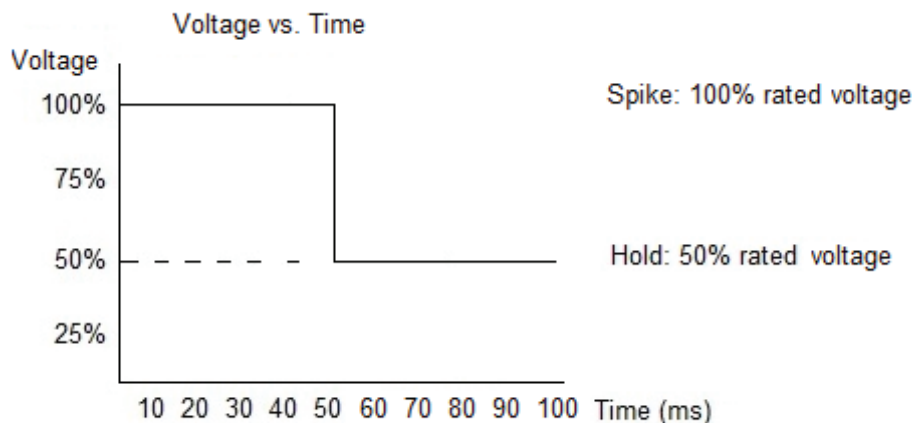

This method greatly reduces power consumption because the valve only draws full current for a short period of time (in this case, a minimum of 50 msec), making it ideal for applications with sensitive power budgets.

Rated voltage must be applied to the Series MX valve for a minimum of 50 msec to ensure full valve actuation in all operating conditions.


#### Important Note:

The Series MX valve is not designed for continuous use at rated voltage. Therefore, rated voltage should not be applied for greater than 20 seconds. Exceeding rated voltage for longer than 20 seconds may adversely affect valve performance. **Contact factory for more details.**




## Series MX Miniature Pneumatic Solenoid Valve Installation and Use

### Recommended Series MX Mounting

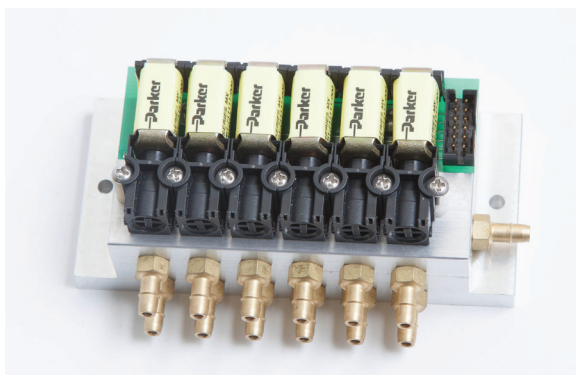


### Series MX Manifold Mount Diagram

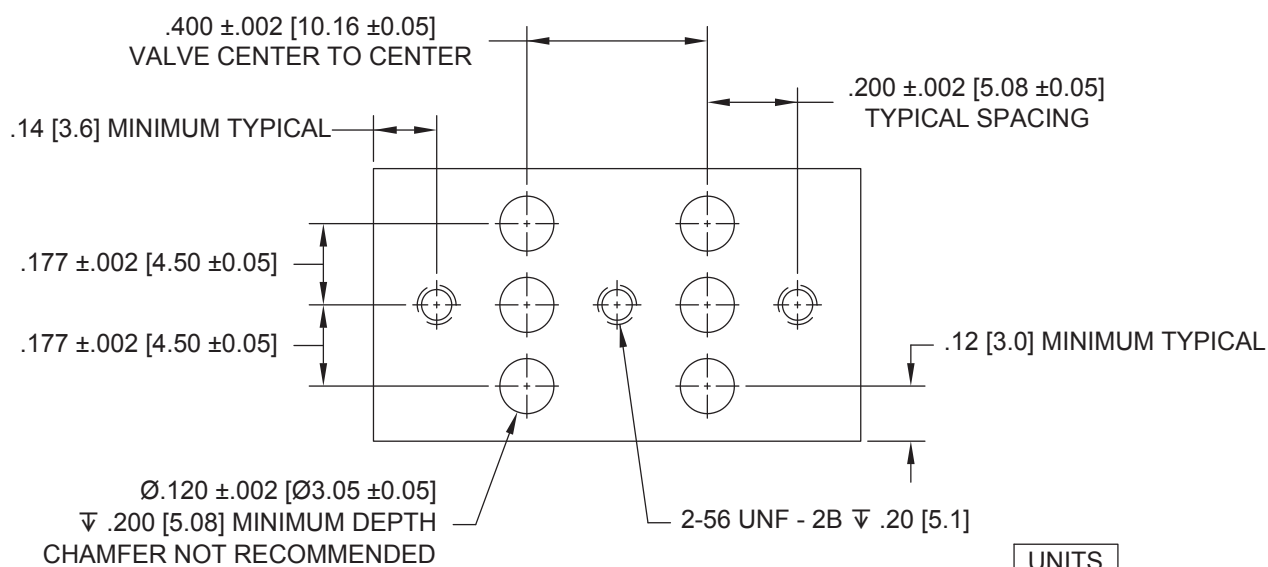

NOTE: RECOMMENDED SURFACE FINISH  $16\mu$  OR BETTER

## Series MX Miniature Pneumatic Solenoid Valve Typical Flow Diagram

### Oxygen Concentrator Application

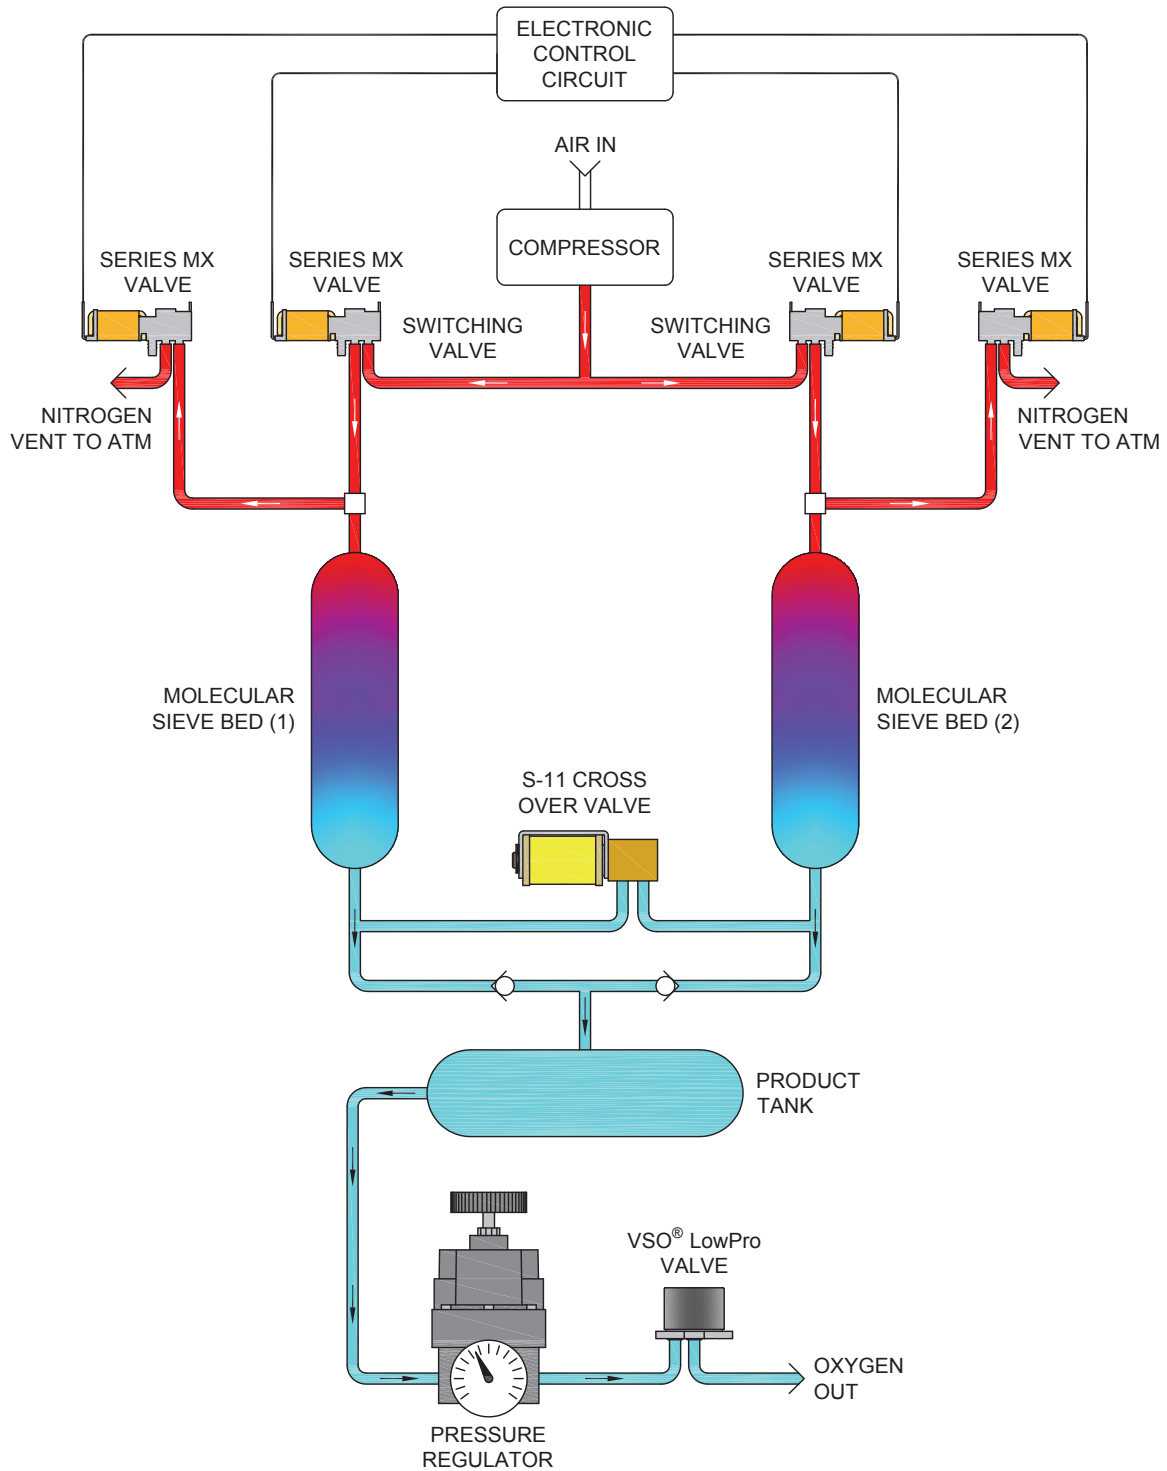

## Series MX Miniature Pneumatic Solenoid Valve

### Accessories

#### Manifold Rubber Gasket (EPDM)

00444-05-E099

(required for manifold mounting and supplied with each valve)



#### 12" (30 cm) Wire Leads

290-006061-002

(for use with 2-Pin Up valve configuration)

Note: Not Included with valve



#### Screw 2-56 x 1/2"

Pan Head, Phillips

191-000112-008

(see valve mounting requirements above)

Note: Not Included with valve



### Ordering Information

Sample Product ID	961	7	1	1	1	1	1	000
Description	Series	Model Number: Orifice Size	Voltage	Electrical Interface	Type	Pressure/ Power (Hold)	Elastomer	
Options	961	7: 0.075 " (1.9 mm) Orifice	1: 5 VDC 2: 12 VDC 3: 24 VDC	1: 2 Pin-Up 2: 2 Pin-PCB	1: 2-Way NC 2: 2-Way NO 3: 3-Way NC 4: 3-Way NO 5: 3-Way Dist	1: 6 psig / 0.25 Watt 2: 15 psig / 0.5 Watt 3: 30 psig / 0.75 Watt	1: FKM 2: Silicone (6 PSI Only)	

#### Accessories

Part Number	Description	Comments
00444-05-E099	Manifold Rubber Gasket, EPDM	Manifold gasket is supplied with each valve. Used as a seal between the valve and manifold.
290-006061-002	Cable, 4 Position, 18" Lead	Not supplied with the valve. Used to electrically interface with the 2 Pin-Up configuration valve.
191-000112-008	Screw 2-56 x 1/2" Pan Head	Not supplied with the valve. Two (2) required for each valve.

NOTE: In order to provide the best possible solution for your application, please provide the following requirements when contacting Applications Engineering:

- Media, Inlet & Outlet Pressures
- Minimum Required Flow Rate
- System Supply Voltage
- Media
- Ambient Temperature Range



Please click on the Order On-line button (or go to [www.parker.com/precisionfluidics/mxvalve](http://www.parker.com/precisionfluidics/mxvalve)) to configure your Series MX-Model 7 Pneumatic Solenoid Valve. For more detailed information, visit us on the Web, or call and refer to the following documents:

#### Document:

- Series MX-Model 7 Performance Specification
- 3-Way, 2 Pin-Up Line Drawing
- 2-Way NO, 2 Pin-Up Line Drawing
- 2-Way NC, 2 Pin-Up Line Drawing
- 3-Way, 2 Pin-PCB Line Drawing
- 2-Way NO, 2 Pin-PCB Line Drawing
- 2-Way NC, 2 Pin-PCB Line Drawing

#### Document Number

790-002435-001  
890-003360-001  
890-003360-002  
890-003360-003  
890-003361-001  
890-003361-002  
890-003361-003

For more information call +1 603 595 1500 or email [ppfinfo@parker.com](mailto:ppfinfo@parker.com)

Visit [www.parker.com/precisionfluidics](http://www.parker.com/precisionfluidics)



# C7 Valve Miniature Cartridge Solenoid Valve

## 7 mm Miniature Cartridge Valve



The Series C7 is a miniature cartridge style solenoid valve with a compact 7 mm diameter. This unique design combines small size, light weight and low power consumption with high flow repeatability and fast response time over an exceptionally long life, up to 130 million cycles. Available in 2-way and 3-way configurations, the valve is manifold mounted utilizing a simple securing system reducing assembly time.


### Markets

- Respiratory and Anesthesia
- Patient Therapy
- Patient Monitoring
- Analytical Chemistry
- Clinical Diagnostics

### Applications

- Portable/Transport Ventilators Gas Control
- Negative Pressure Wound Therapy
- Air Over Liquid Dispense
- Sidestream CO<sub>2</sub> measurement
- Portable/Hand held environmental monitoring

### Features

- Variety of orifice sizes with pressures up to 145 PSI (10 bar).
- Floating frictionless plunger enables reliable and repeatable operation up to 130 Million cycles.
- Low power design reduces heat and energy consumption.
- Cartridge configuration enables compact integration saving space and weight.
- Simple mechanical fastening prevents valve being dislodged due to vibration or pressure spikes.
- RoHS & REACH compliant. 

## Product Specifications

### Mechanical

<b>Valve Type:</b>
Solenoid Cartridge Valve
2-Way Normally Closed (NC)
3-Way Normally Closed (NC)
<b>Media:</b> Gases and Liquids* (see details in liquid datasheet)
<b>Operating Environment:</b>
32°F to 122°F (0°C to 50°C)
<b>Storage Environment:</b>
-40°F to 158°F (-40°C to 70°C)
<b>Dimensions:</b>
- Diameter: 0.28 in (7 mm)
- Length: 0.79 in (20 mm)
<b>Porting:</b>
- Cartridge Seal
<b>Weight:</b> 0.11 oz (3.1 g)
<b>Internal Volume:</b>
2-Way 81µL
3-Way 90µL

Orifice	0.012 in (0.3 mm)		0.020 in (0.5 mm)		0.031 in (0.8 mm)		0.039 in (1.0 mm)		
	2-Way	3-Way	2 Way	3 Way	2 Way	3 Way	2 Way	3 Way	
Max Vacuum & Pressure	PSI	145	145	116	87	73	36.3	43.5	21.8
	Bar	10	10	8	6	5	2.5	3	1.5
	Cv	0.003	0.004	0.007	0.01	0.009	0.014	0.015	0.015
	SLPM (air)	7	7	14	11	12	10	13	7

### Electrical

#### Voltage (VDC):

12 and 24 VDC ± 5%  
(Other voltages available on request.)

#### Electrical Connections:

3.2 in (80 mm) Flying Leads

#### Power:

Typical 0.5W - 1.2W  
(Please see Table 1 for more details)

### Wetted Materials

#### Body:

Stainless Steel Series 300 and 400

#### Seals: (Internal and External)

FKM, EPDM

### Performance Characteristics

#### Response:

10 ms maximum cycling

#### Recommended Filtration:

0.3 mm Orifice  
5 Micron  
0.5 mm, 0.8 mm, & 1.0 mm Orifice  
10 Micron

#### Reliability:


2-Way 130 Million  
3-Way 55 Million  
0.90 Reliability Factor  
95% Confidence




\*Please contact factory for additional details on liquid compatibility.

## C7 Miniature Cartridge Valve

### Flow Curve


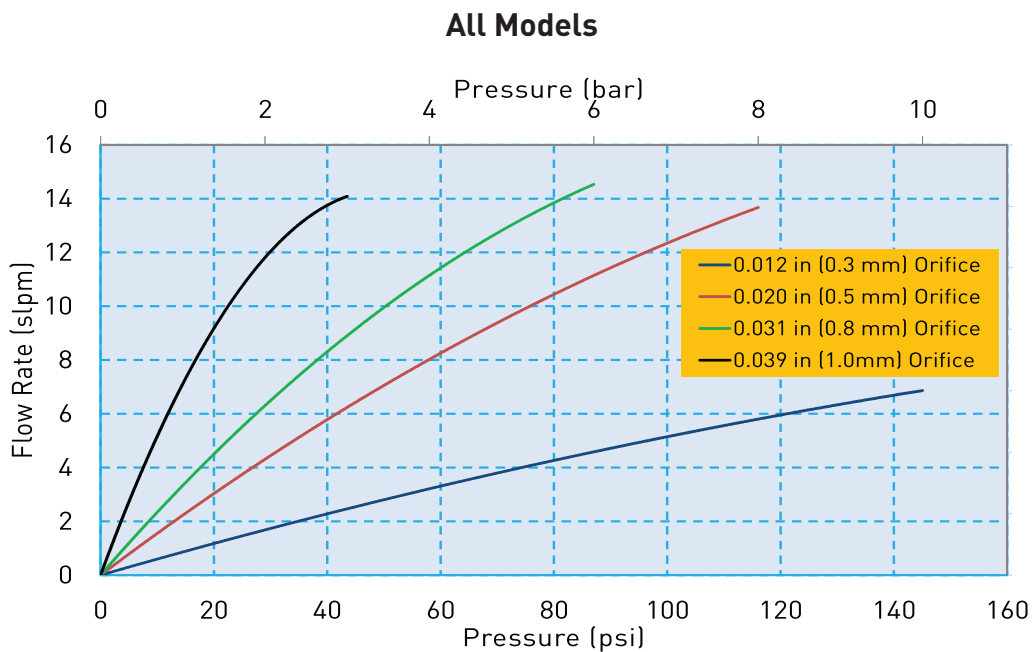


### Flow Curve

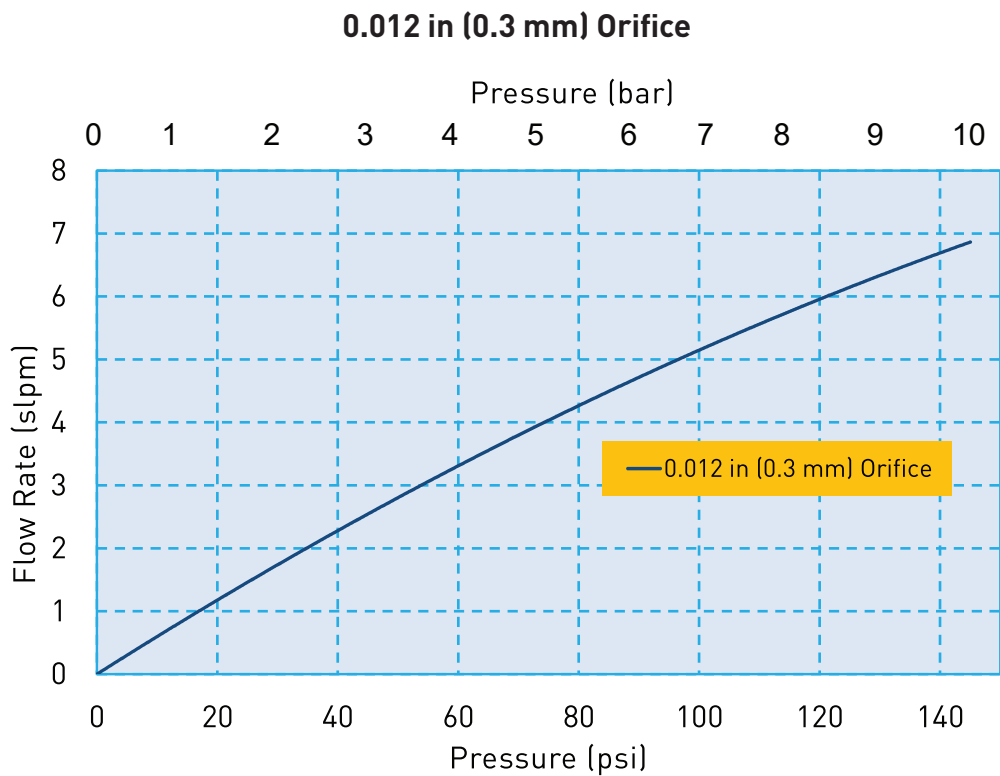


# C7 Miniature Cartridge Valve

## Flow Curve

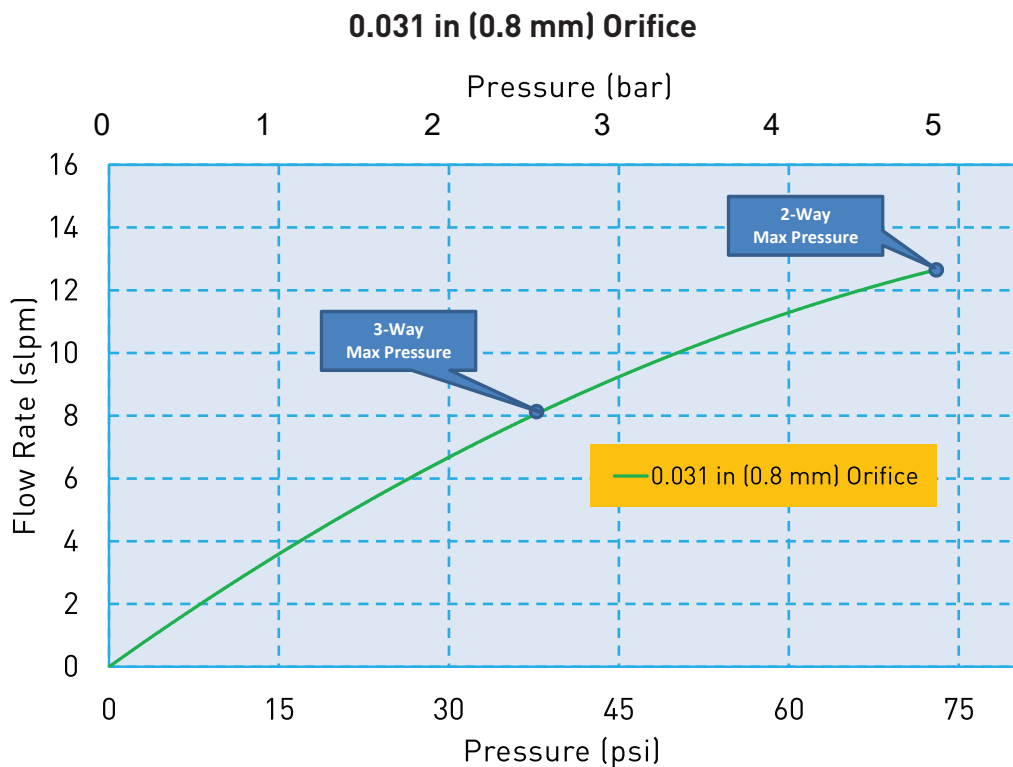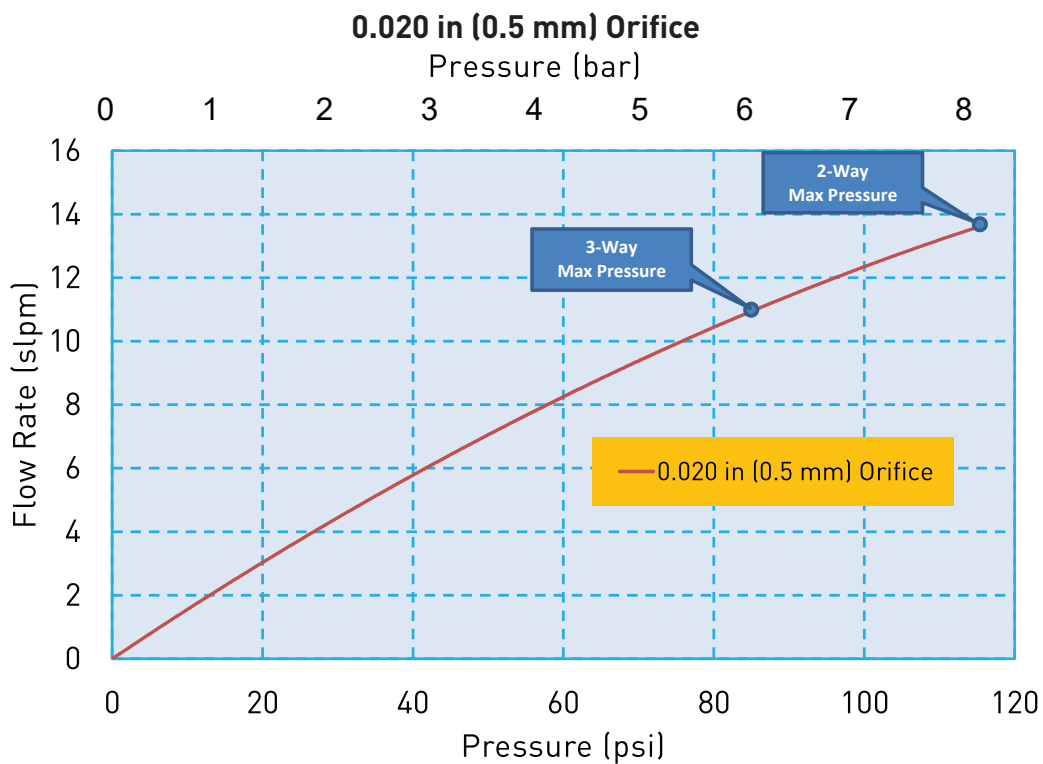

## C7 Miniature Cartridge Valve

### Flow Curve

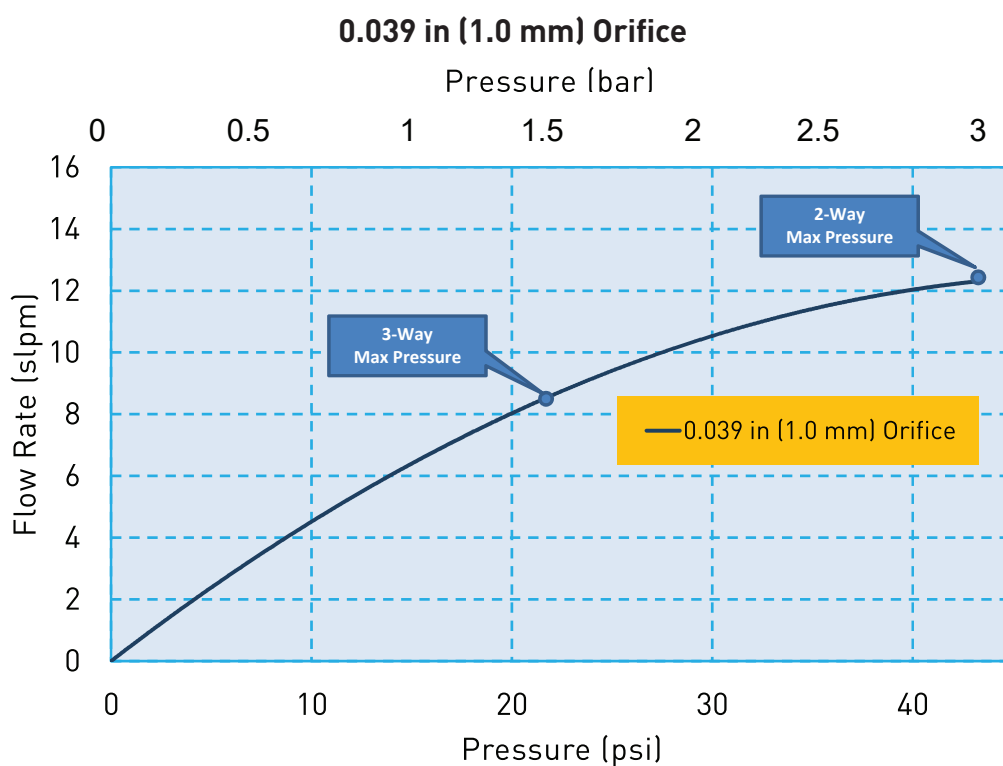

### Electrical Interface



#### Wire Leads

Standard: 3.2 in (80 mm) Wire Leads, stripped at end

## C7 Miniature Cartridge Valve


### Electrical Requirements

Table 1

Orifice	0.012 in (0.3 mm)				0.020 in (0.5 mm)				0.031 in (0.8 mm)				0.039 in (1.0 mm)			
Valve Type	2-Way		3-Way		2-Way		3-Way		2-Way		3-Way		2-Way		3-Way	
Voltage (VDC)*	12V	24V	12V	24V	12V	24V	12V	24V	12V	24V	12V	24V	12V	24V	12V	24V
Power (Watts)	0.5	0.6	1	1.2	1	0.85	1	1.2	1	1.2	1	1.2	1	1.2	1	1.2
Resistance (Ohm)**	288	995	140	495	140	700	140	495	140	495	140	495	140	495	140	495

\*  $\pm 5\%$ , other voltages available on request  
 \*\*  $\pm 5\%$  @ 68°F, 20°C

### Pneumatic Interface/Mechanical Integration



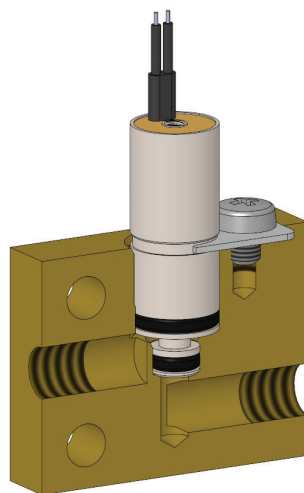




## C7 Miniature Cartridge Valve




### Dimensions

#### 2-Way

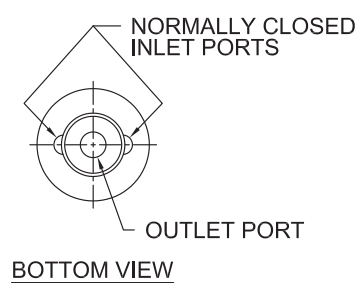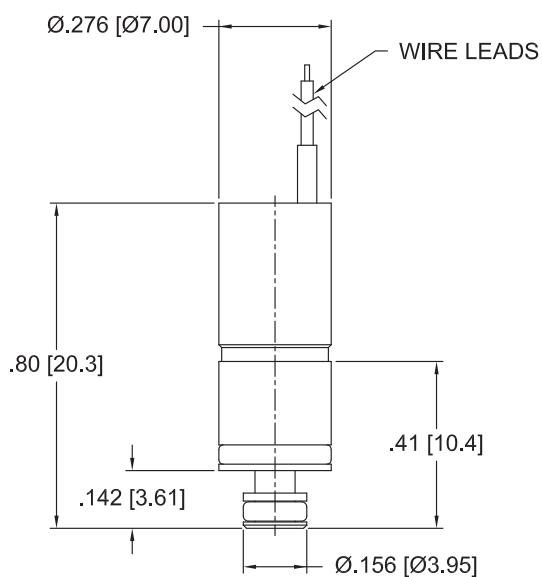

UNITS
IN [MM]



#### 3-Way

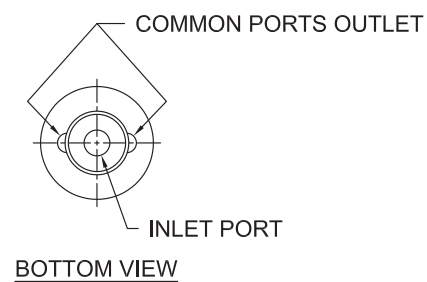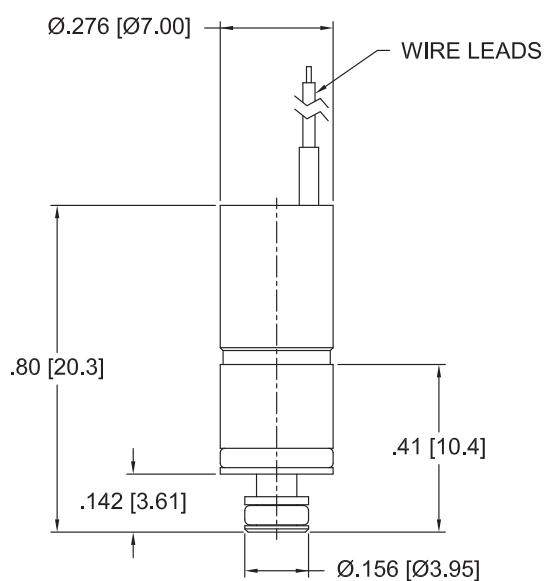

UNITS
IN [MM]

# C7 Miniature Cartridge Valve

## ANSI Symbols

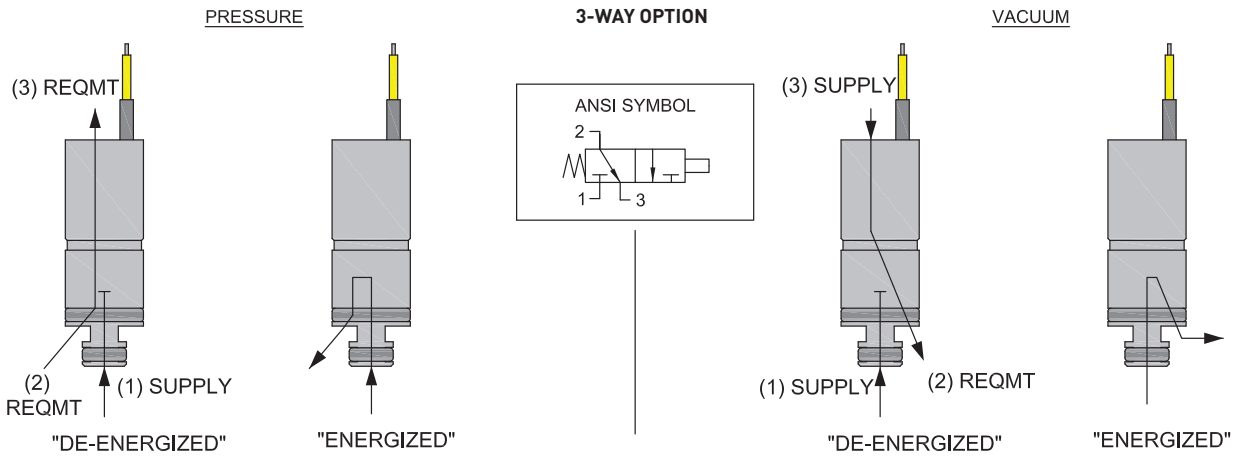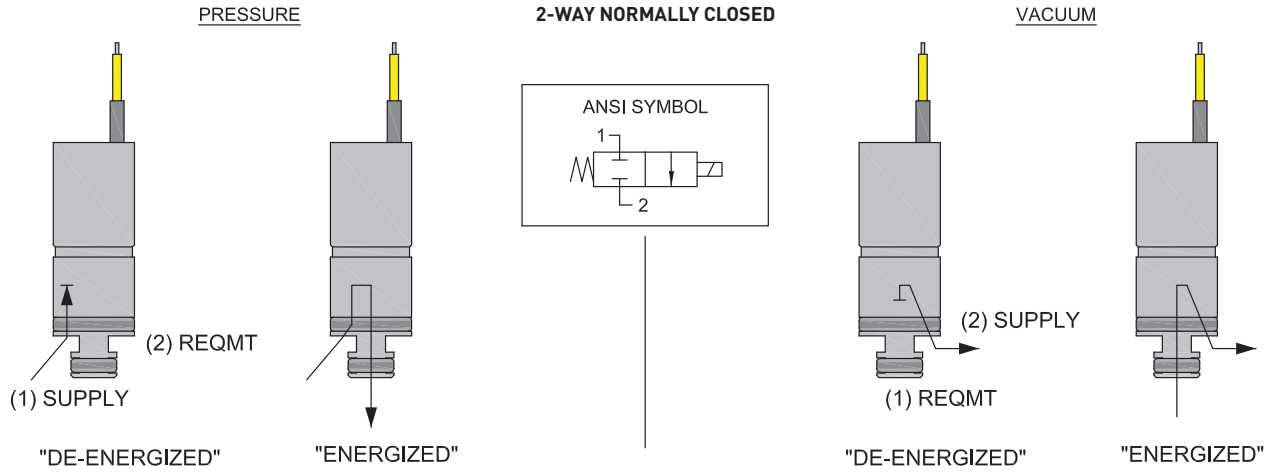


## C7 Miniature Cartridge Valve


### Installation and Use

During installation of the C7 valve, the maximum force allowed to press it into the manifold is: 6.74 lbf (30 N)  
Lubrication is recommended (I.E. alcohol or DI water depending on compatibility constraints)

#### Recommended Valve Manifold Dimensions

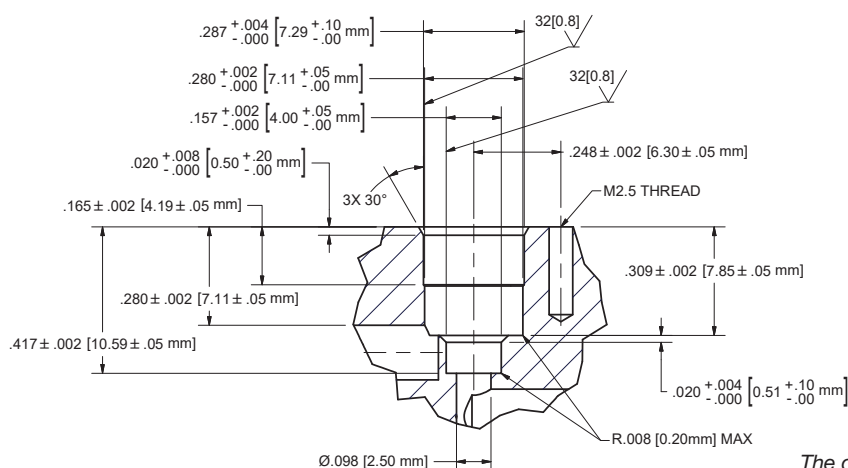

#### Recommended Valve Mounting

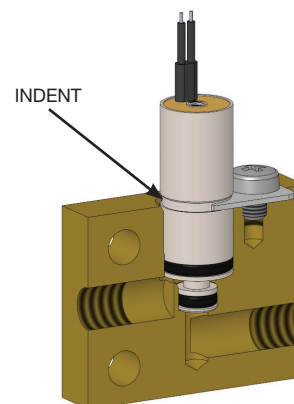


The correct location to use when holding the valve in place in the manifold is the indent at the middle of the valve body. If the top of the valve is used to hold the valve in place, the working pressure the valve will receive, can push the valve upward and exceed the maximum insertion force for the valve. This could damage the valve.

## Installation and Use

### C7 Evaluation Manifold Dimensions and Design

#### C07-MCS

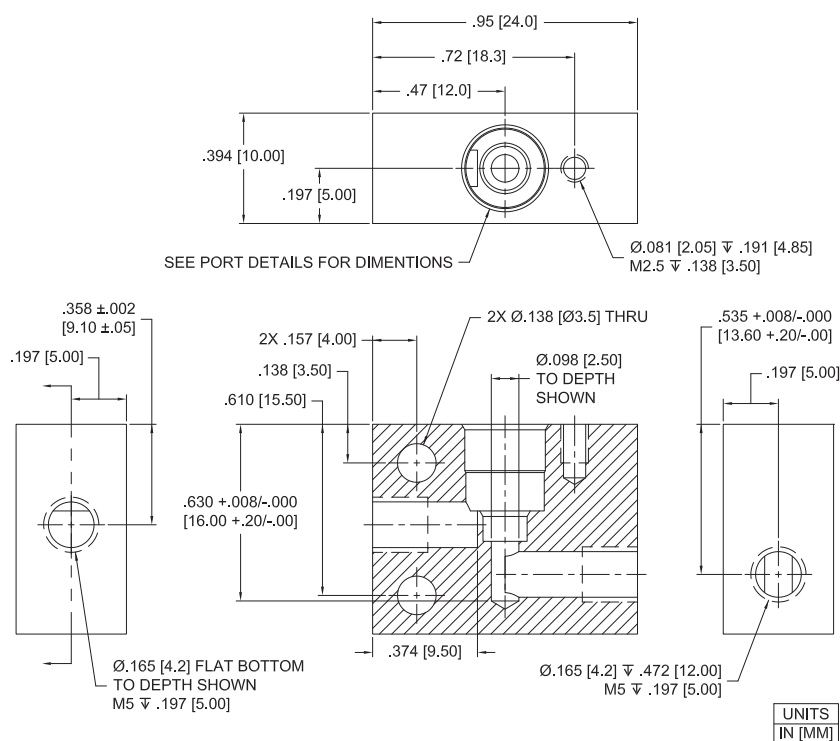

## C7 Miniature Cartridge Valve


### Installation and Use

#### Optional Reduced Power Control Method

“Hit and Hold” is an optional control method to increase power efficiency for the C7 series valves.

Hit and Hold is a common control method used to reduce component power consumption and heat generation without sacrificing performance. The “Hit” or “Spike” state refers to the rated voltage required to actuate the valve. The “Hold” state is a substantial reduction in the rated voltage (normally 50% of the rated voltage) that maintains the valve in an actuated state.

Hit and Hold control can be incorporated using several different approaches, including discrete component circuits or programmable logic. The graph below illustrates a voltage “Hit” and “Hold” control method, however pulse width modulation (PWM) is also an acceptable control method.

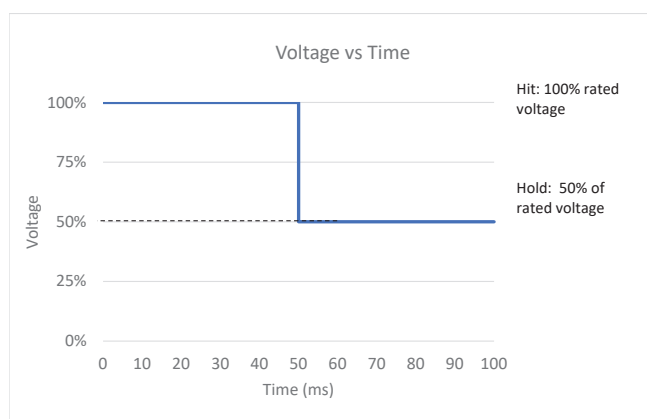


C7 Hit and Hold Specification	
Hit Voltage Level	Rated Voltage
Hold Voltage Level	50% of Rated Voltage
Minimum Hit Time	50 ms
Maximum Hit Time	N/A
PWM Frequency (Minimum)	min. 1 kHz
Hold Nominal Duty Cycle	50%

This method greatly reduces power consumption because the valve only draws full current for a short period of time making it ideal for applications with sensitive power budgets.

Note: 50% duty cycle is a general recommendation; therefore, it is recommended that specific application testing is completed to verify the proper “hold” requirement. Factors that could impact hit and hold voltage levels include vibration, shock, pressure variation and pressure locations that are driven from specific usage. The hit and hold circuit design, combined with Parker’s valve, need to be validated for each specific application to ensure the valve will actuate under all usage conditions. **Contact Factory for more details.**

## C7 Miniature Cartridge Valve Typical Flow Diagram

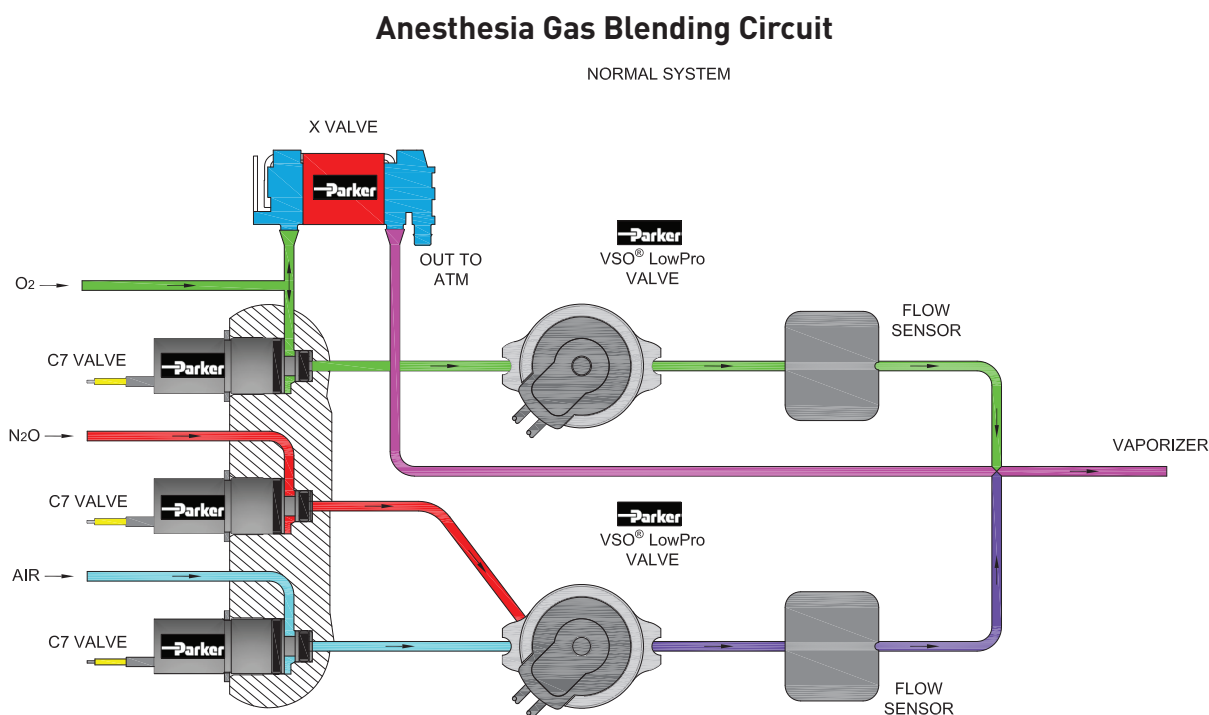

### Accessories

**C7 Evaluation Manifold with clip  
and screw (Valve not included)**  
C07-MCS



**Replacement Clip for C07-MCS**  
C07-C



**Replacement Screw for C07-MCS**  
C07-S



**Replacement FKM O-Ring for C7 Valve, Large**  
C07-LG



**Replacement FKM O-Ring for C7 Valve, Small**  
C07-SM



## C7 Miniature Cartridge Valve

### Ordering Information

Sample Part ID	C07	-	2	24	FK	03	F	F	-	000
Description	Series	Configuration	Coil Voltage	Elastomer	Orifice	Mounting Style	Electrical Interface	Custom		
Options	C07: 7 mm Cartridge Valve	2: 2-Way	12: 12 VDC	EP: EPDM	03: 0.012 in (0.3 mm)	F: Face Seal	F: 3.2 in (80 mm) flying lead	000: Standard		
		3: 3-Way	24: 24 VDC	FK: FKM	05: 0.020 in (0.5 mm)					
					08: 0.031 in (0.8 mm)					
					10: 0.039 in (1.0 mm)					

#### Accessories

C07-MCS: C07 Evaluation Manifold with Clip and Screw, Not supplied with the valve.

C07-C: Replacement Clip used on C07-MCS\*

C07-S: Replacement Screw used on C07-MCS\*

C07-LG: Spare O-Ring for C07 Valve, FKM, Large\*\*

C07-LGE: Spare O-Ring for C07 Valve, EPDM, Large\*\*

C07-SM: Spare O-Ring for C07 Valve, FKM, Small\*\*

C07-SME: Spare O-Ring for C07 Valve, EPDM, Small\*\*

\* Not Supplied with Valve, Replacement Part for C07-MCS    \*\* Supplied with Valve

**NOTE: For Evaluation - Please Add C07-MCS To Your Sample Order. All Valves Ship With O-Rings Installed**

NOTE: In order to provide the best possible solution for your application, please provide the following requirements when contacting Applications Engineering:

- Media, Inlet & Outlet Pressures
- Minimum Required Flow Rate
- System Supply Voltage
- Media & Ambient Temperature Range



Please click on the Order On-line button to configure your C7 valve. For CAD models and more detailed information, please visit us on the Web ([www.parker.com/precisionfluidics/C7\\_GasCartridgeValve](http://www.parker.com/precisionfluidics/C7_GasCartridgeValve)), call (603.595.1500) or email at [ppfinfo@parker.com](mailto:ppfinfo@parker.com).

Parker Hannifin Precision Fluidics Division reserves the right to make changes. Drawings are for reference only.

For more information call +1 603 595 1500 or email [ppfinfo@parker.com](mailto:ppfinfo@parker.com)  
Visit [www.parker.com/precisionfluidics](http://www.parker.com/precisionfluidics)



# C15 Valve Miniature Cartridge Solenoid Valve

## 15 mm Miniature Cartridge Valve



The Series C15 is a miniature cartridge style solenoid valve with a unique design that combines small size, light weight and low power consumption with high flow repeatability and fast response time over an exceptionally long life, up to 500 million cycles. Available in 2-way and 3-way configurations, the valve is manifold mounted utilizing a simple securing system reducing assembly time.

### Markets

- Medical and Analytical Gas Control
- Respiratory & Anesthesia

### Applications

- Portable/Transport Ventilators
- Negative Pressure Wound Therapy
- Air Over Liquid Dispense
- Sidestream CO<sub>2</sub> measurement
- Portable/Hand held environment monitoring

### Features

- Variety of orifice sizes with pressures up to 145 PSI (10 bar).
- Floating frictionless plunger enables reliable and repeatable operation up to 500 Million cycles.
- Low power design reduces heat and energy consumption.
- Cartridge configuration enables compact integration saving space and weight.
- Simple mechanical fastening prevents valve being dislodged due to vibration or pressure spikes.
- RoHS & REACH compliant.



## Product Specifications

### Mechanical

<b>Valve Type:</b>
Solenoid Cartridge Valve 2-Way Normally Closed (NC) 3-Way Normally Closed (NC)
<b>Media:</b> Gases and Liquids* (See details in liquid datasheet)
<b>Operating Environment:</b> 32°F to 122°F (0°C to 50°C)
<b>Storage Environment:</b> -40°F to 158°F (-40°C to 70°C)
<b>Dimensions:</b> - Diameter: 0.59 in (15 mm) - Length: 1.14 in (29 mm)
<b>Porting:</b> - Cartridge Seal
<b>Weight:</b> 0.78 oz (22 g)
<b>Internal Volume:</b> 2-Way: 391 µL 3-Way: 461 µL

	Orifice	0.020 in (0.5 mm)		0.040 in (1.0 mm)		0.060 in (1.5 mm)		0.080 in (2.0 mm)	
		Type	2-Way	3-Way	2-Way	3-Way	2-Way	3-Way	2-Way
Max Vacuum & Pressure	PSI	145	145	116	102	58	50.8	21.8	14.5
	Bar	10	10	8	7	4	3.5	1.5	1
	Cv	0.01	0.01	0.032	0.028	0.058	0.048	0.093	0.076
	SLPM (air)	18	18	55	43	55	41	44	29

### Electrical

<b>Voltage (VDC):</b> 12 and 24 VDC ± 5% (Other voltages available on request.)
<b>Electrical Connections:</b> 3.2 in (80 mm) Flying Leads
<b>Power:</b> Typical 1.1W - 1.7W (Please see Table 1 for more details)

### Wetted Materials

<b>Body:</b> Stainless Steel Series 300 and 400
<b>Seals: (Internal and External)</b> FKM, EPDM


### Performance Characteristics

<b>Response:</b> 10 ms Maximum, Cycling
<b>Proof Pressure:</b> 120% of Rated Maximum Pressure
<b>Recommended Filtration:</b> 10 µm
<b>Reliability:</b> 2-Way: 500 Million Cycles 3-Way: 200 Million Cycles 0.90 Reliability Factor 95% Confidence


\*Please contact factory for additional details on liquid compatibility.

# C15 Miniature Cartridge Valve

## Flow Curve

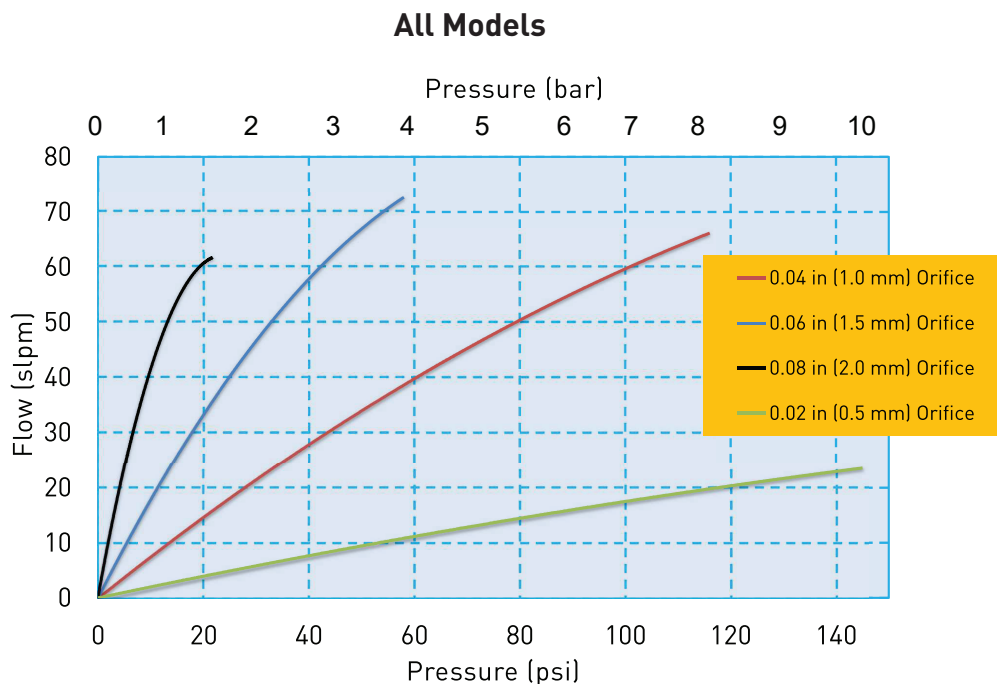



## Flow Curve

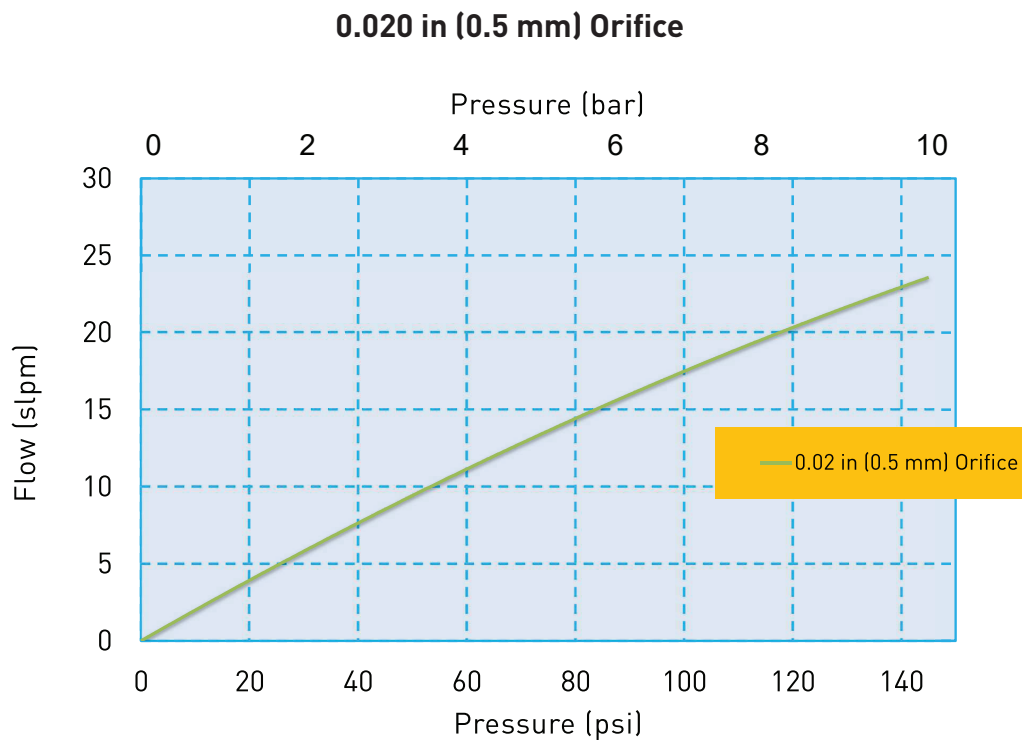




## C15 Miniature Cartridge Valve

### Flow Curve

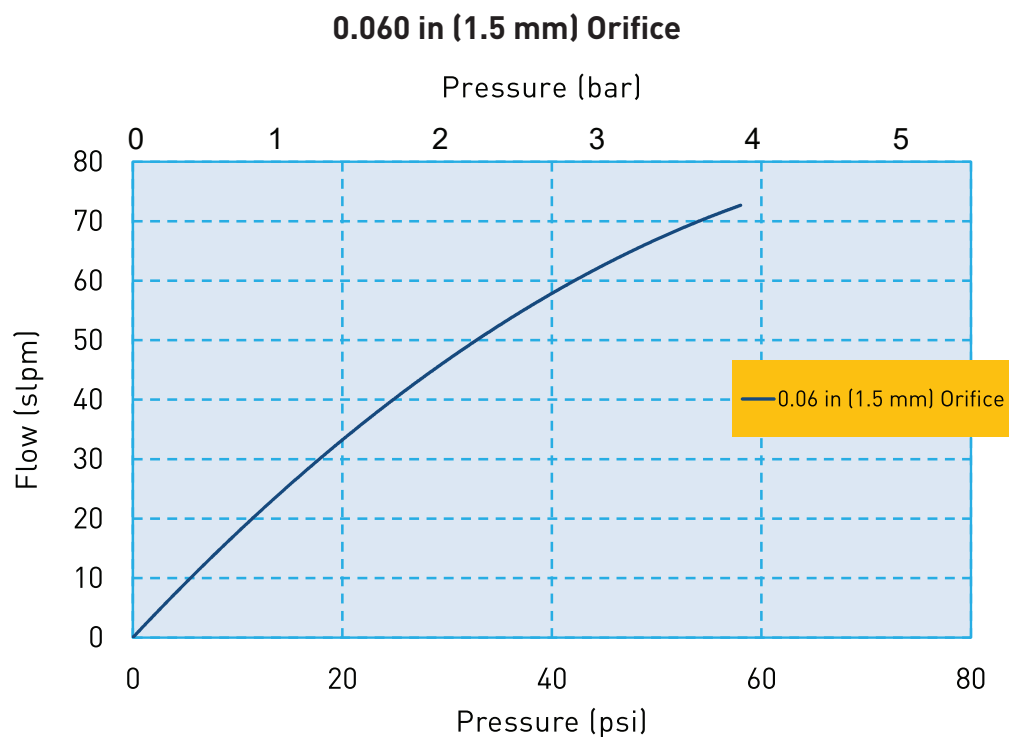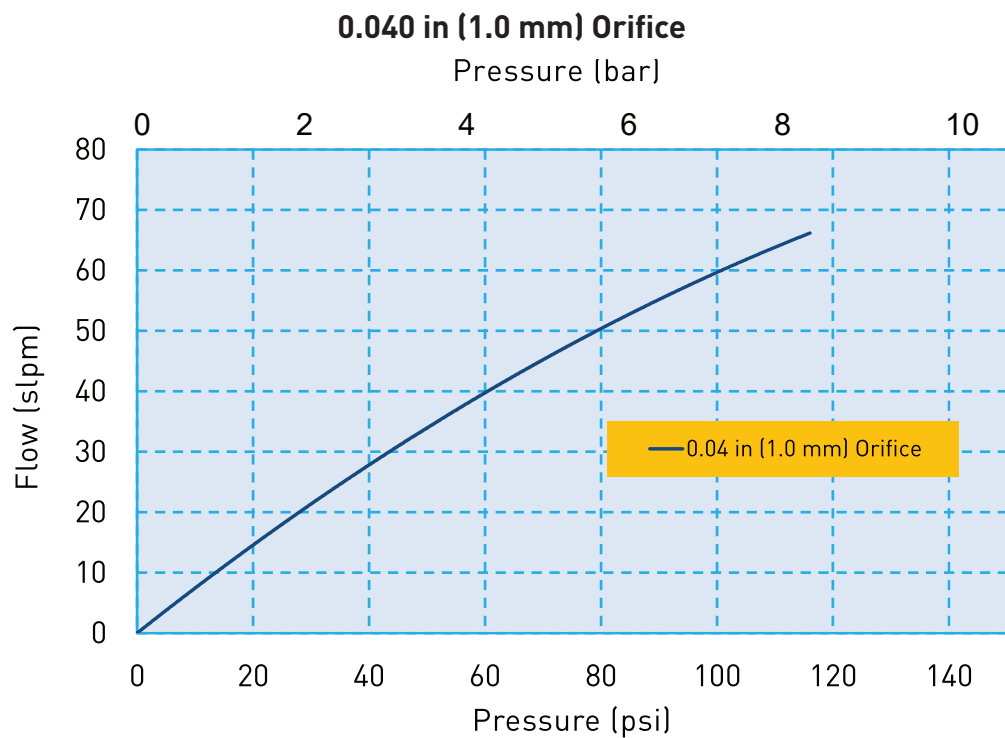

## C15 Miniature Cartridge Valve

### Flow Curve

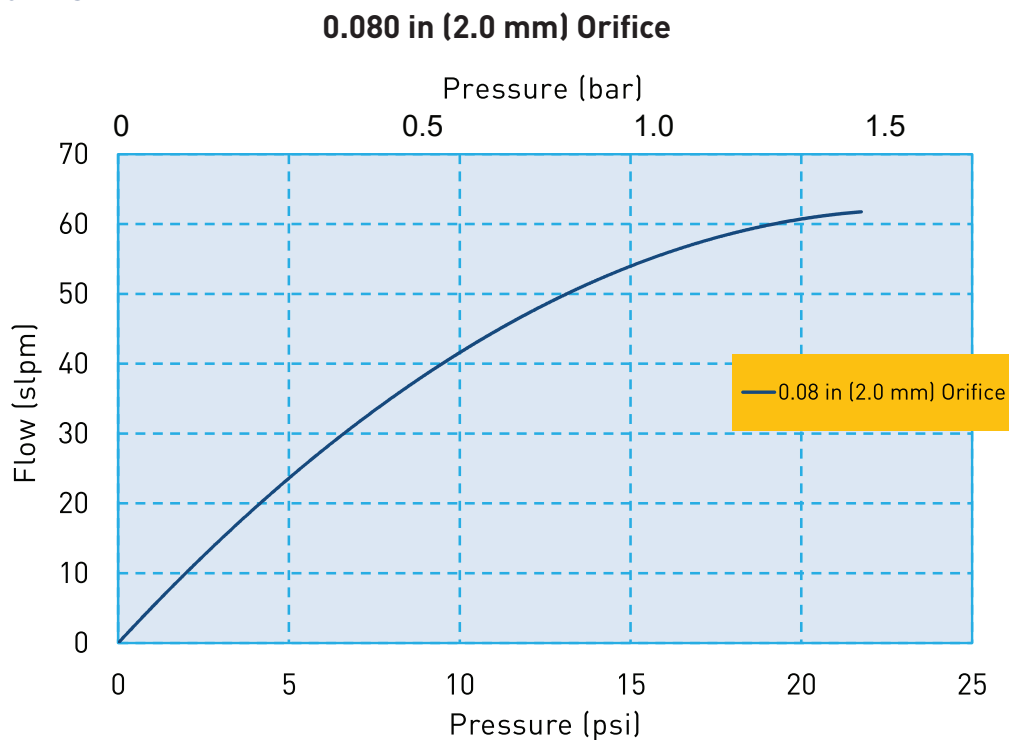

### Electrical Interface



#### Wire Leads

Standard: 3.2 in (80 mm) Wire Leads, stripped at end

## C15 Miniature Cartridge Valve

### Electrical Requirements

**Table 1**

Orifice	0.020 in (0.5 mm)				0.040 in (1.0 mm)				0.060 in (1.5 mm)				0.080 in (2.0 mm)			
Valve Type	2-Way		3-Way		2-Way		3-Way		2-Way		3-Way		2-Way		3-Way	
Voltage (VDC)*	12	24	12	24	12	24	12	24	12	24	12	24	12	24	12	24
Power (Watts)	1.1	1.1	1.7	1.6	1.7	1.6	1.7	1.6	1.7	1.6	1.7	1.6	1.7	1.6	1.7	1.6
Resistance (Ohm)**	132	525	85	361	85	361	85	361	85	361	85	361	85	361	85	361

\*  $\pm 5\%$ , other voltages available on request  
 \*\*  $\pm 5\%$  @ 68°F, 20°C



### Pneumatic Interface/Mechanical Integration



## C15 Miniature Cartridge Valve




### Dimensions

#### 2-Way Valve Configuration

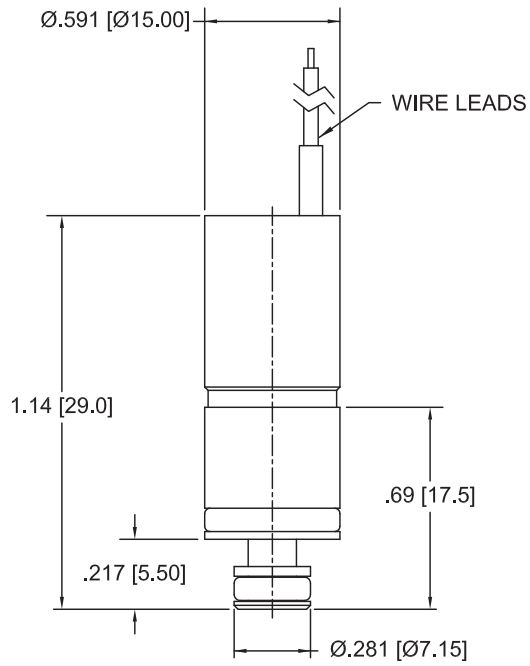

UNITS  
IN [MM]

#### 3-Way Valve Configuration

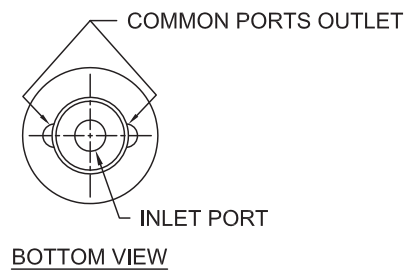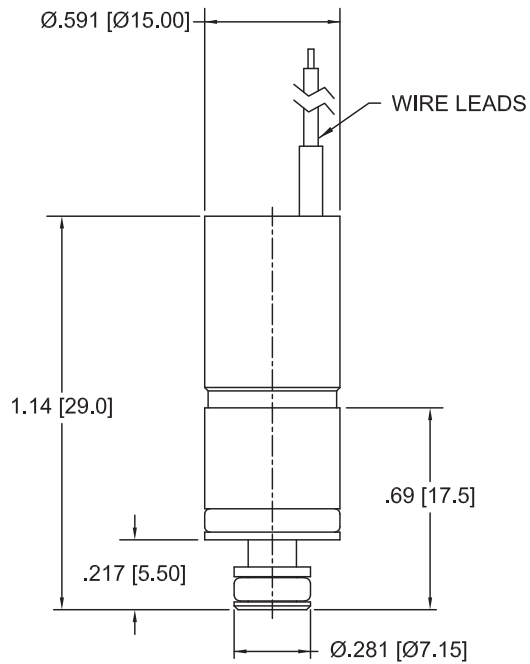


UNITS  
IN [MM]


## C15 Miniature Cartridge Valve

### ANSI Symbols

#### 2-Way Normally Closed

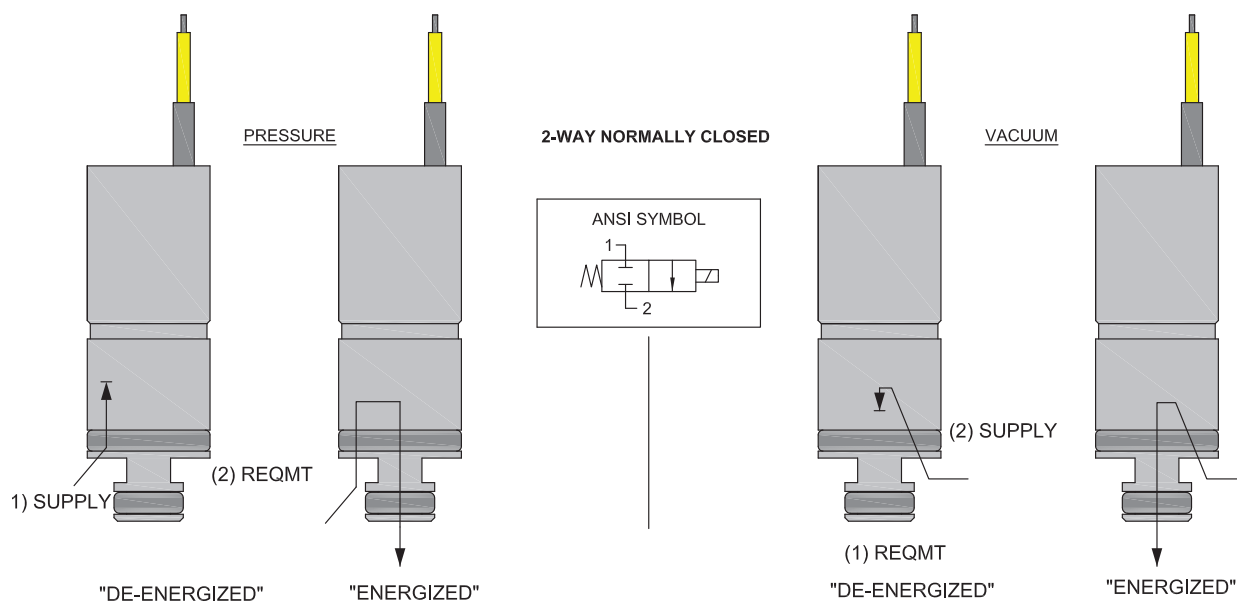

#### 3-Way Normally Closed

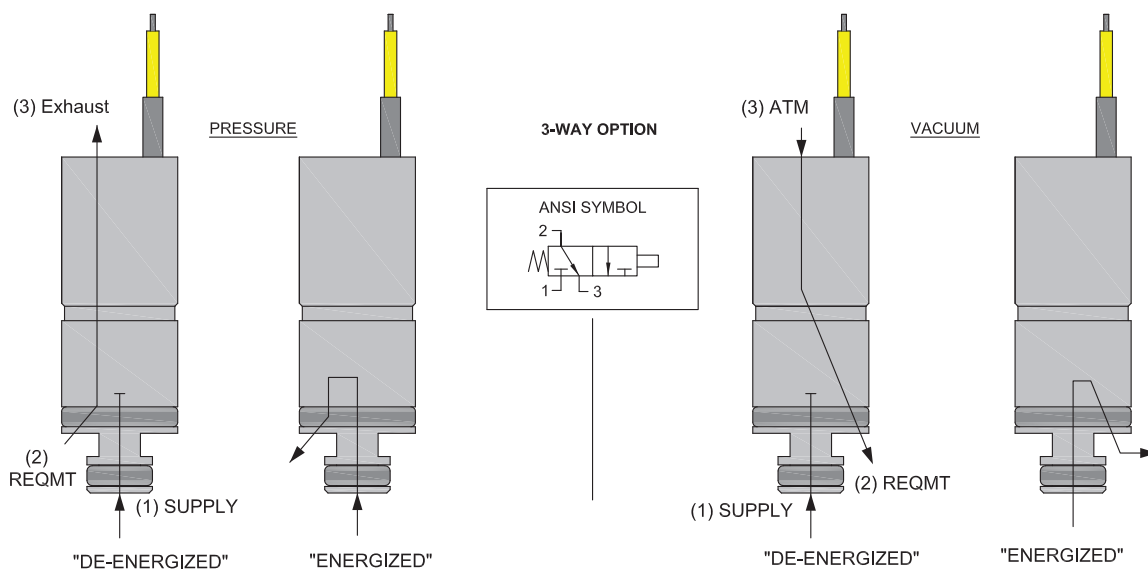


# C15 Miniature Cartridge Valve


## Installation and Use

During installation of the C15 valve, the maximum force allowed to press it into the manifold is: 22.48 lbf (100 N)  
Lubrication is recommended (I.E. alcohol or DI water depending on compatibility constraints)

### Recommended Valve Manifold Dimensions

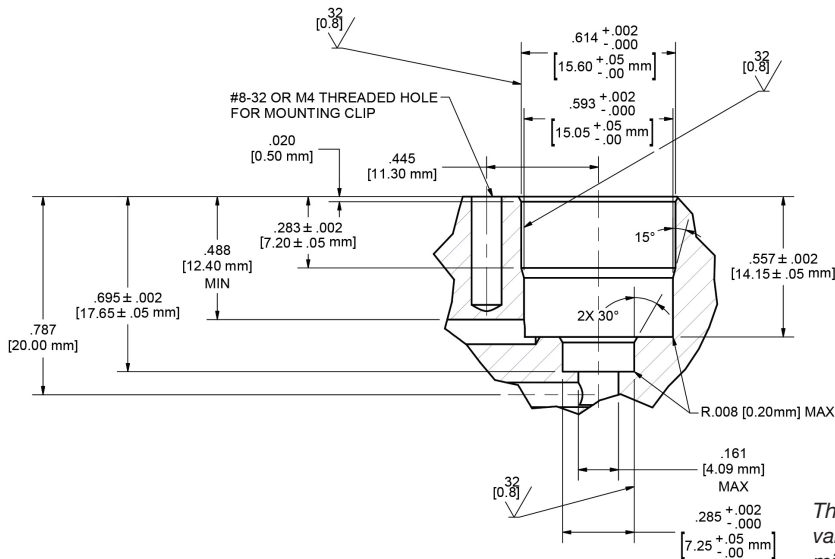


### Recommended Valve Mounting

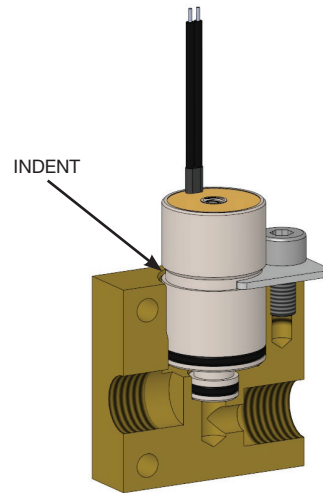

The correct location to use when holding the valve in place in the manifold is the indent at the middle of the valve body. If the top of the valve is used to hold the valve in place, the working pressure the valve will receive, can push the valve upward and exceed the maximum insertion force for the valve. This could damage the valve.

## Installation and Use

### C15 Evaluation Manifold Dimensions and Design C15-MCS

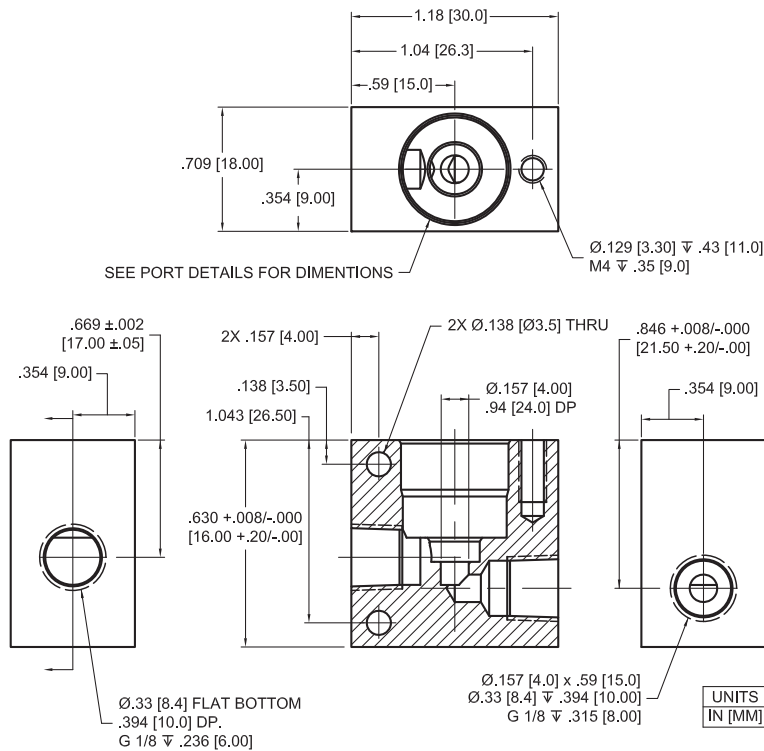

## C15 Miniature Cartridge Valve


### Installation and Use

#### Optional Reduced Power Control Method

“Hit and Hold” is an optional control method to increase power efficiency for the C15 series valves.

Hit and Hold is a common control method used to reduce component power consumption and heat generation without sacrificing performance. The “Hit” or “Spike” state refers to the rated voltage required to actuate the valve. The “Hold” state is a substantial reduction in the rated voltage (normally 50% of the rated voltage) that maintains the valve in an actuated state.

Hit and Hold control can be incorporated using several different approaches, including discrete component circuits or programmable logic. The graph below illustrates a voltage “Hit” and “Hold” control method, however pulse width modulation (PWM) is also an acceptable control method.

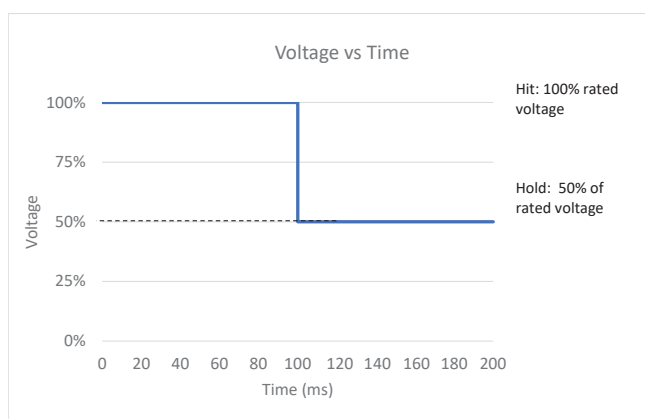

C15 Hit and Hold Specification	
Hit Voltage Level	Rated Voltage
Hold Voltage Level	50% of Rated Voltage
Minimum Hit Time	100 ms
Maximum Hit Time	N/A
PWM Frequency (Minimum)	1 kHz
Hold Nominal Duty Cycle	50%

This method greatly reduces power consumption because the valve only draws full current for a short period of time making it ideal for applications with sensitive power budgets.

Note: 50% duty cycle is a general recommendation; therefore, it is recommended that specific application testing is completed to verify the proper “hold” requirement. Factors that could impact hit and hold voltage levels include vibration, shock, pressure variation and pressure locations that are driven from specific usage. The hit and hold circuit design, combined with Parker’s valve, need to be validated for each specific application to ensure the valve will actuate under all usage conditions. **Contact Factory for more details.**

## C15 Miniature Cartridge Valve

### Accessories

**C15 Evaluation Manifold with clip and screw (Valve not included)**

C15-MCS



**Replacement Clip for C15-MCS**

C15-C



**Replacement Screw for C15-MCS**

C15-S



**Replacement O-Ring for C15 Valve, Large**

C15-LG



**Replacement FKM O-Ring for C15 Valve, Small**

C15-SM





## C15 Miniature Cartridge Valve

### Ordering Information

Sample Part ID	C15	-	2	24	FK	05	F	F	-	000
Description	Series		Configuration	Coil Voltage	Elastomer	Orifice	Mounting Style	Electrical Interface		Custom
Options	C15: 15 mm Cartridge Valve		2: 2-Way	12: 12 VDC	EP: EPDM	05: 0.020 in (0.5 mm)	F: Face Seal	F: 3.2 in (80 mm) flying lead		000: Standard
			3: 3-Way	24: 24 VDC	FK: FKM	10: 0.040 in (1.0 mm)				
						15: 0.060 in (1.5 mm)				
						20: 0.080 in (2.0 mm)				

#### Accessories

C15-MCS: C15 Evaluation Manifold with Clip and Screw, Not supplied with the valve.

C15-C: Replacement Clip used on C15-MCS\*

C15-S: Replacement Screw used on C15-MCS\*

C15-LG: Spare O-Ring for C15 Valve, Large\*\*

C15-SM: Spare O-Ring for C15 Valve, Small\*\*

\* Not Supplied with Valve, Replacement Part for C15-MCS    \*\* Supplied with Valve

**NOTE: For Evaluation - Please Add C15-MCS To Your Sample Order. All Valves Ship With O-Rings Installed**

NOTE: In order to provide the best possible solution for your application, please provide the following requirements when contacting Applications Engineering:

- Media, Inlet & Outlet Pressures
- Minimum Required Flow Rate
- System Supply Voltage
- Media & Ambient Temperature Range



Please click on the Order On-line button to configure your C15 valve. For CAD models and more detailed information, please visit us on the Web ([www.parker.com/precisionfluidics/C15\\_GasCartridgeValve](http://www.parker.com/precisionfluidics/C15_GasCartridgeValve)), call (+1.603.595.1500) or email at [ppfinfo@parker.com](mailto:ppfinfo@parker.com).

Parker Hannifin Precision Fluidics Division reserves the right to make changes. Drawings are for reference only.

For more information call +1 603 595 1500 or email [ppfinfo@parker.com](mailto:ppfinfo@parker.com)  
Visit [www.parker.com/precisionfluidics](http://www.parker.com/precisionfluidics)



# C21 Valve

## Miniature Cartridge Solenoid Valve

### 21 mm Miniature Cartridge Valve



The Series C21 is a miniature cartridge style solenoid valve with a unique design that combines small size, light weight and low power consumption with high flow repeatability and fast response time over an exceptionally long life, of up to 20 million cycles. Available in 2-way and 3-way configurations, the valve is manifold mounted utilizing a simple securing system reducing assembly time.


#### Markets

- Medical and Analytical Gas Control
- Respiratory & Anesthesia
- Patient Therapy

#### Applications

- Compression Therapy
- Oxygen Concentrators & Conservers
- Negative Pressure Wound Therapy

#### Features

- Variety of orifice sizes with pressures up to 145 PSI (10 bar).
- Floating frictionless plunger enables reliable and repeatable operation of up to 20 Million cycles.
- Low power design reduces heat and energy consumption.
- Cartridge configuration enables compact integration saving space and weight.
- Simple mechanical fastening prevents valve being dislodged due to vibration or pressure spikes.
- RoHS & REACH compliant. 

## Product Specifications

### Mechanical

<b>Valve Type:</b>
Solenoid Cartridge Valve
3-Way
2-Way Normally Closed (NC)
<b>Media:</b> Gases and Liquids* (See more Information in Liquid Datasheet)
<b>Operating Environment:</b>
32°F to 122°F (0°C to 50°C)
<b>Storage Environment:</b>
-40°F to 158°F (-40°C to 70°C)
<b>Dimensions:</b>
- Diameter: 0.83 in (21 mm)
- Length: 1.54 in (39 mm)
<b>Porting:</b>
- Cartridge Seal
<b>Weight:</b> 2.17 oz (60 g)
<b>Internal Volume:</b>
2-Way: 1173µL
3-Way: 1376µL

Orifice	0.040 in (1.0 mm)		0.080 in (2.0 mm)		0.12 in (3.0 mm)		0.16 in (4.0 mm)		
Type	2-Way	3-Way	2-Way	3-Way	2-Way	3-Way	2-Way	3-Way	
Max Vacuum & Pressure	PSI	145	145	116	87	58	36	29	15
	Bar	10	10	8	6	4	2.5	2	1
	Cv	0.03	0.03	0.08	0.07	0.13	0.11	0.18	0.14
	SLPM (air)	67.5	60	140	90	124	70	101	55

### Electrical

#### Voltage (VDC):

12 and 24 VDC ± 5%  
(Other voltages available on request.)

#### Electrical Connections:

3.2 in (80 mm) Flying Leads

#### Power:

Typical 2.5W - 2.6W  
(Please see Table 1 for more details)

### Wetted Materials

#### Body:

Stainless Steel

#### Seals: (Internal and External)

FKM, EPDM

### Performance Characteristics

#### Response:

10 ms Maximum, Cycling

#### Recommended Filtration:


10 µm

#### Reliability:


2-Way: 20 Million Cycles  
3-Way: 20 Million Cycles  
0.90 Reliability Factor  
95% Confidence

## C21 Miniature Cartridge Valve

### Flow Curve


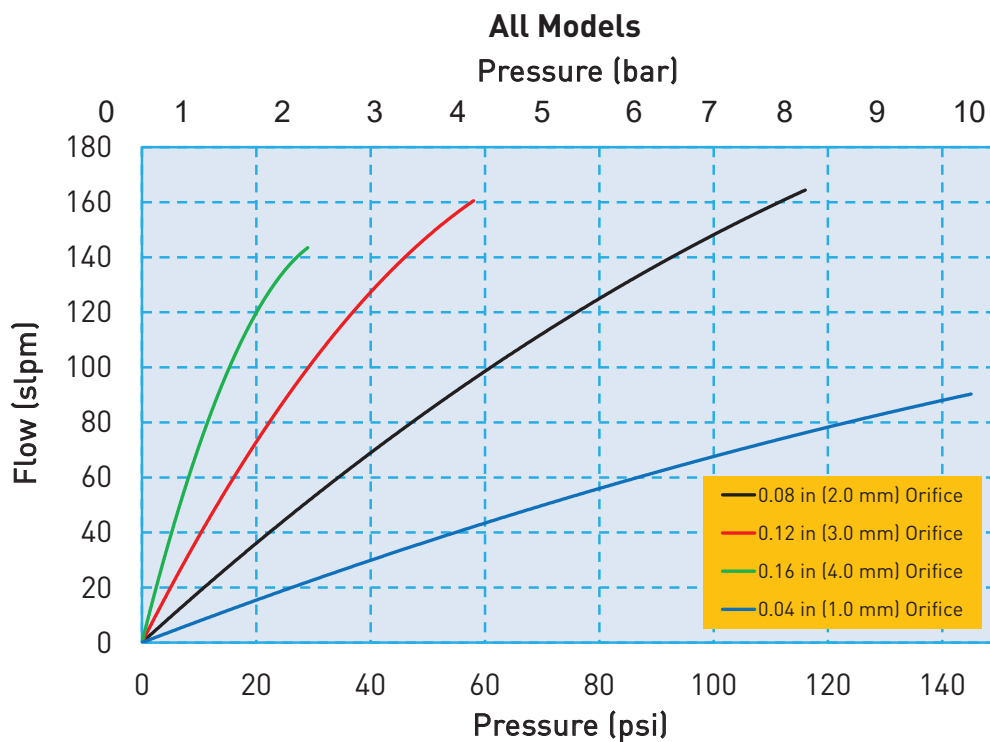


### Flow Curve

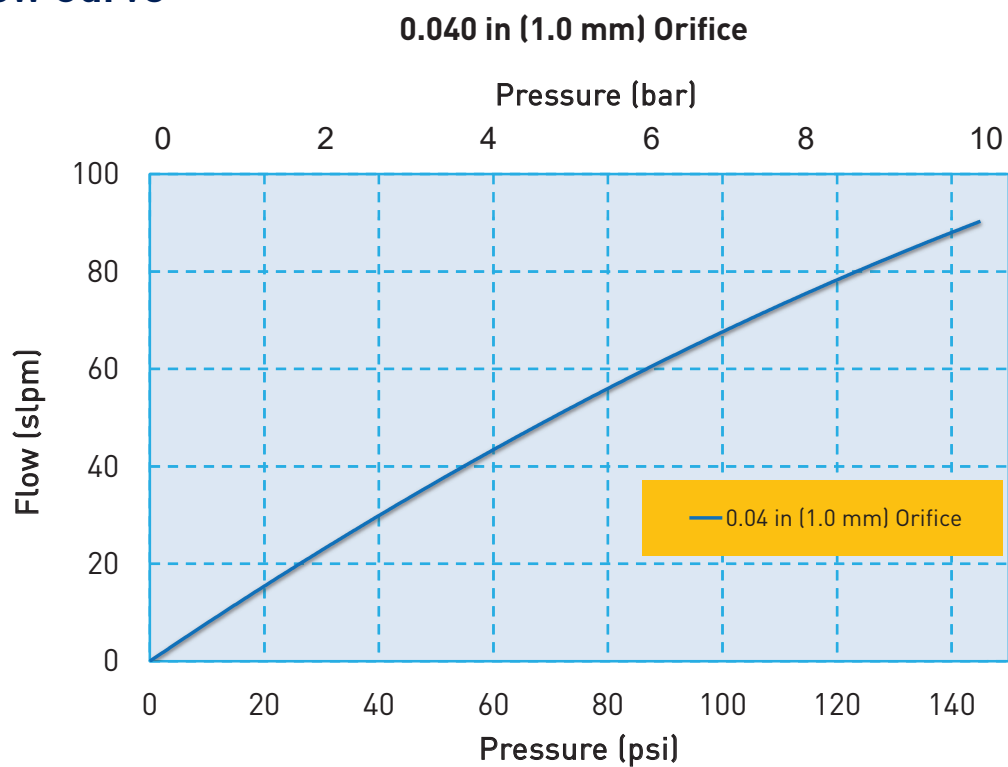


## C21 Miniature Cartridge Valve

### Flow Curve

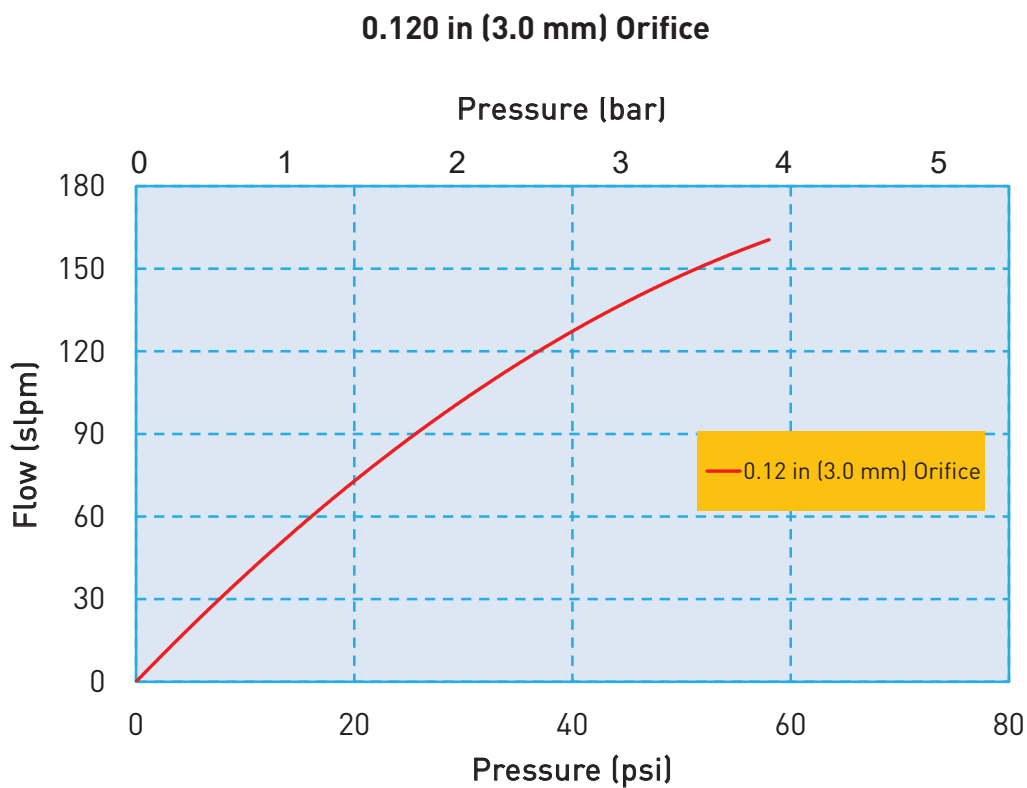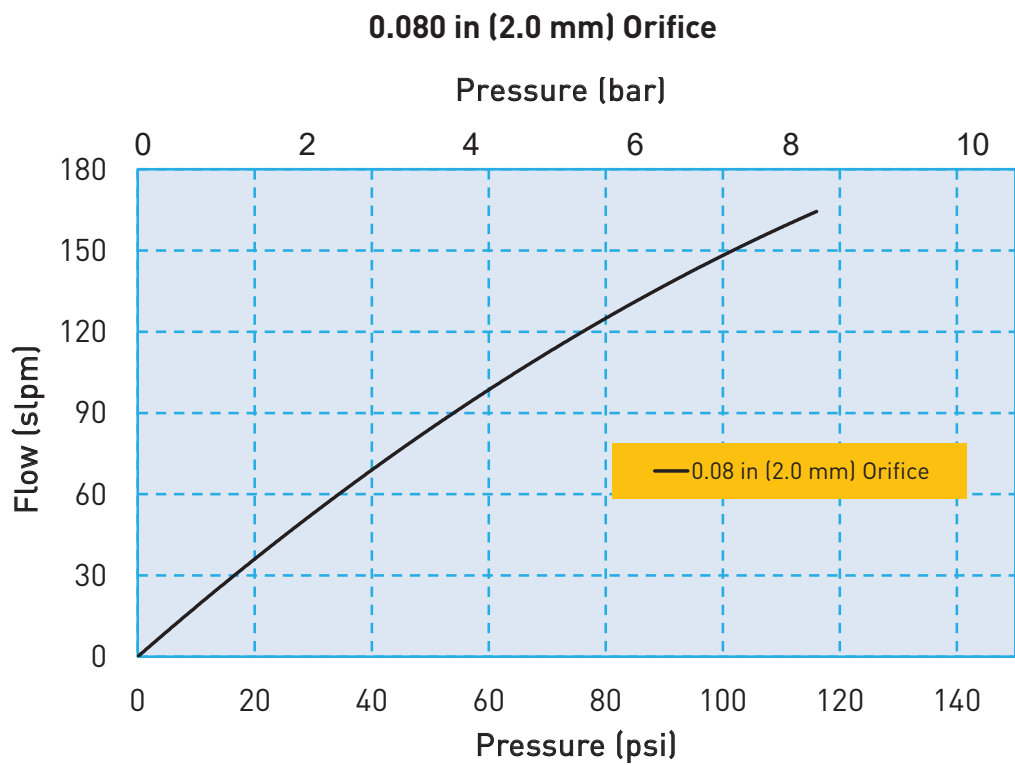

## C21 Miniature Cartridge Valve

### Flow Curve

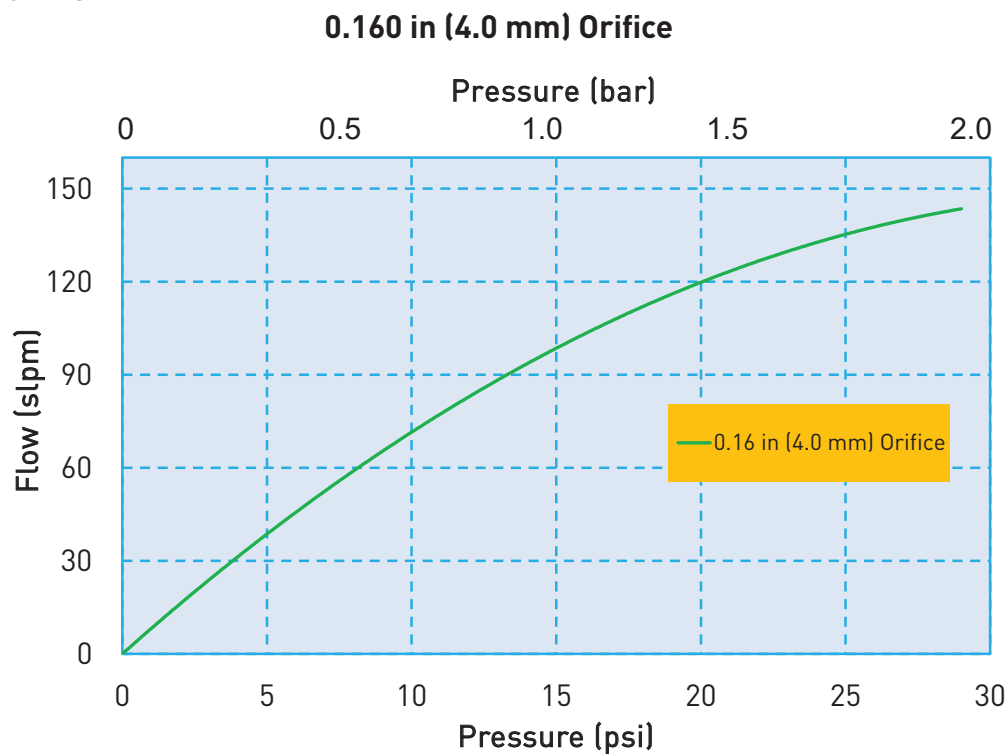

### Electrical Interface



**Wire Leads**

Standard: 3.2 in (80 mm) Wire Leads, stripped at end

## C21 Miniature Cartridge Valve

### Electrical Requirements

**Table 1**

Orifice	0.040 in (1.0 mm)				0.080 in (2.0 mm)				0.12 in (3.0 mm)				0.16 in (4.0 mm)			
Valve Type	2-Way		3-Way		2-Way		3-Way		2-Way		3-Way		2-Way		3-Way	
Voltage (VDC)*	12	24	12	24	12	24	12	24	12	24	12	24	12	24	12	24
Power (Watts)	2.6	2.5	2.6	2.5	2.6	2.5	2.6	2.5	2.6	2.5	2.6	2.5	2.6	2.5	2.6	2.5
Resistance (Ohm)**	56	235	56	235	56	235	56	235	56	235	56	235	56	235	56	235

\*  $\pm 5\%$ , other voltages available on request  
 \*\*  $\pm 5\%$  @ 68°F, 20°C


### Pneumatic Interface/Mechanical Integration




## C21 Miniature Cartridge Valve

### Dimensions

#### 2-Way Valve Configuration

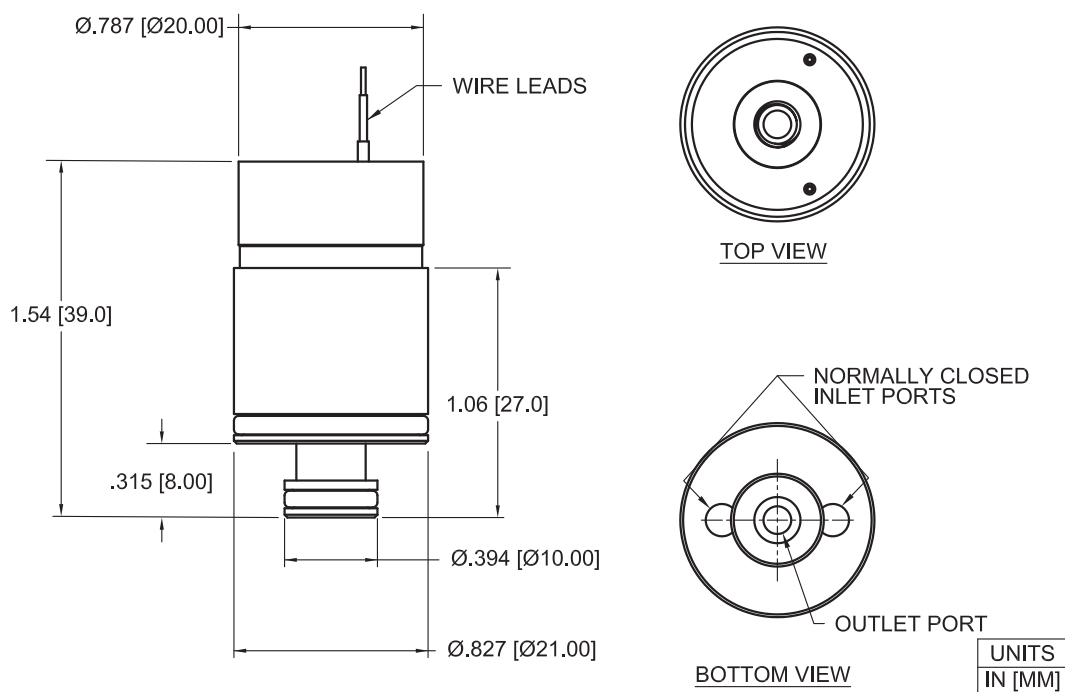


#### 3-Way Valve Configuration

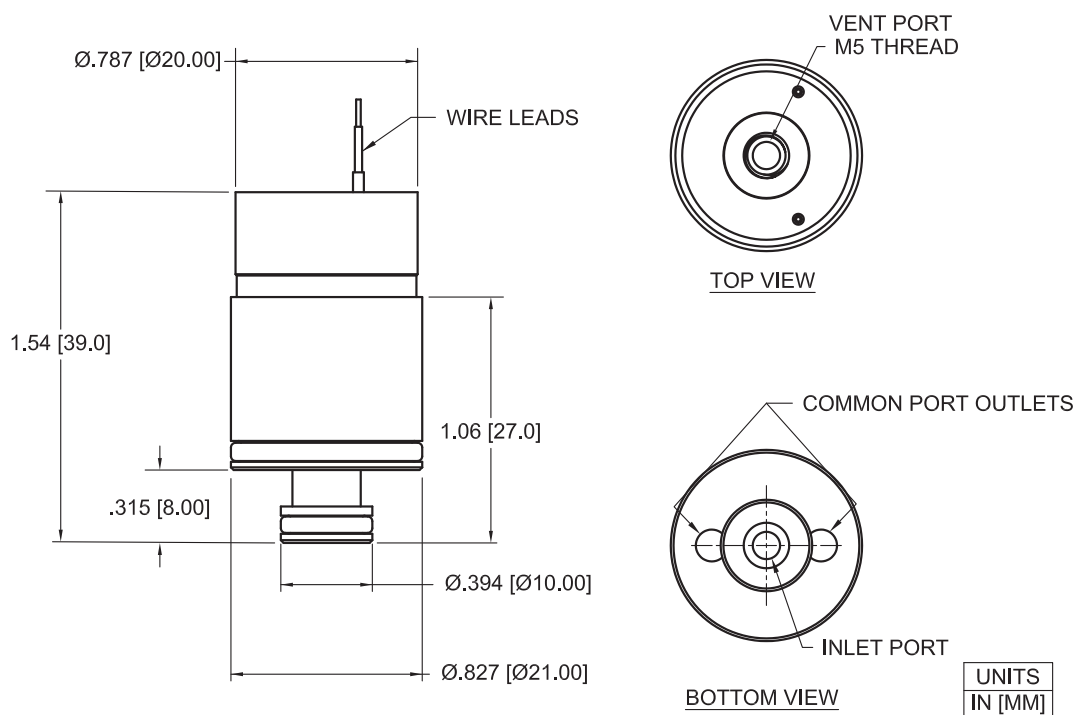


## C21 Miniature Cartridge Valve

### ANSI Symbols

#### 2-Way Normally Closed

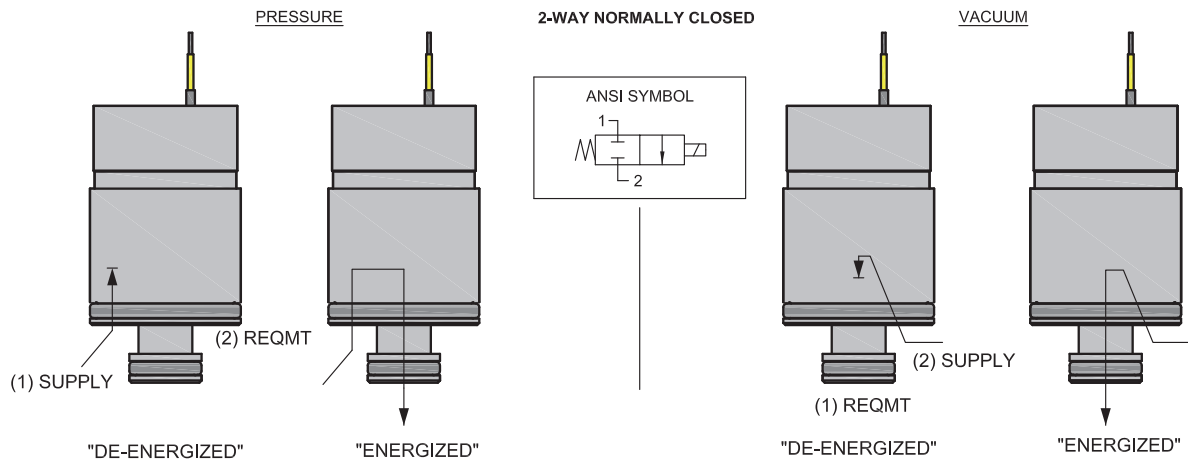

#### 3-Way Normally Closed

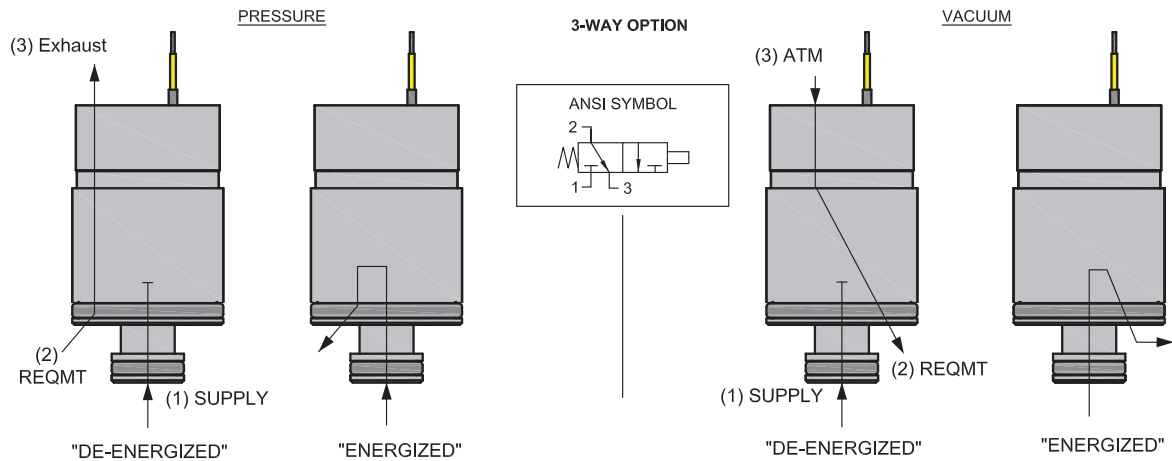




# C21 Miniature Cartridge Valve


## Installation and Use

During installation of the C21 valve, the maximum force allowed to press it into the manifold is: 44.96 lbf (200 N)  
 Lubrication is recommended (I.E. alcohol or DI water depending on compatibility constraints)

### Recommended Valve Manifold Dimensions

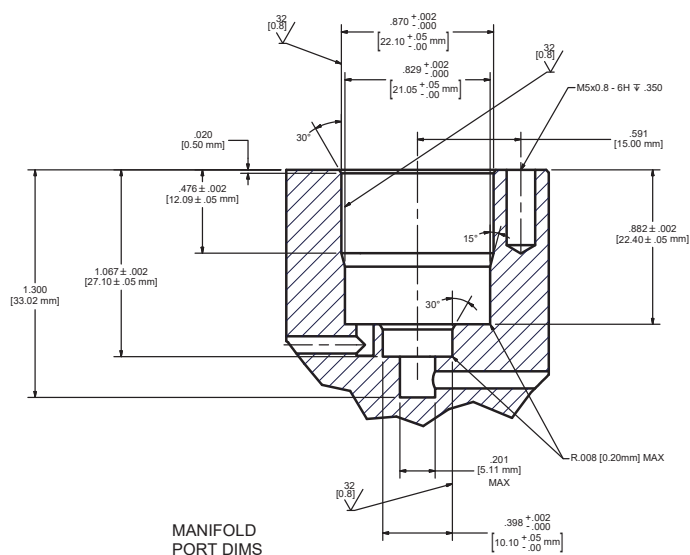


### Recommended Valve Mounting

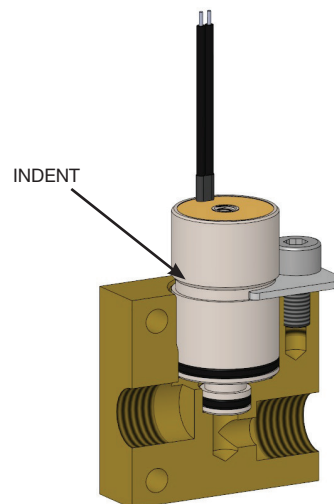

The correct location to use when holding the valve in place in the manifold is the indent at the middle of the valve body. If the top of the valve is used to hold the valve in place, the working pressure the valve will receive, can push the valve upward and exceed the maximum insertion force for the valve. This could damage the valve.

## Installation and Use

### C21 Evaluation Manifold Dimensions and Design C21-MCS

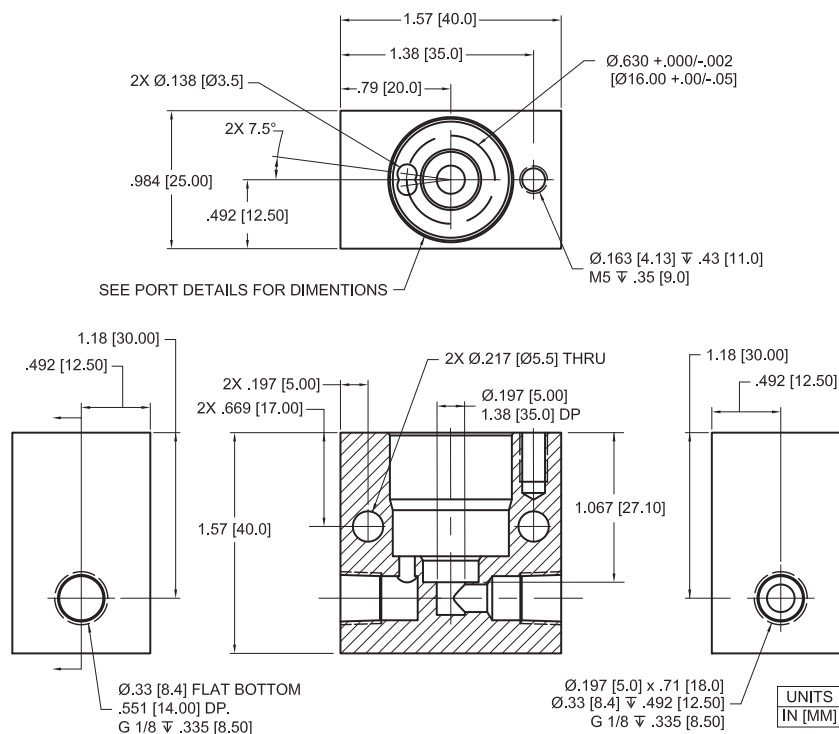

## C21 Miniature Cartridge Valve

### Installation and Use

#### Optional Reduced Power Control Method

“Hit and Hold” is an optional control method to increase power efficiency for the C21 series valves.

Hit and Hold is a common control method used to reduce component power consumption and heat generation without sacrificing performance. The “Hit” or “Spike” state refers to the rated voltage required to actuate the valve. The “Hold” state is a substantial reduction in the rated voltage (normally 50% of the rated voltage) that maintains the valve in an actuated state.

Hit and Hold control can be incorporated using several different approaches, including discrete component circuits or programmable logic. The graph below illustrates a voltage “Hit” and “Hold” control method, however pulse width modulation (PWM) is also an acceptable control method.



C21 Hit and Hold Specification	
Hit Voltage Level	Rated Voltage
Hold Voltage Level	50% of Rated Voltage
Minimum Hit Time	100 ms
Maximum Hit Time	N/A
PWM Frequency (Minimum)	1 kHz
Hold Nominal Duty Cycle	50%

This method greatly reduces power consumption because the valve only draws full current for a short period of time making it ideal for applications with sensitive power budgets.

Note: 50% duty cycle is a general recommendation; therefore, it is recommended that specific application testing is completed to verify the proper “hold” requirement. Factors that could impact hit and hold voltage levels include vibration, shock, pressure variation and pressure locations that are driven from specific usage. The hit and hold circuit design, combined with Parker’s valve, need to be validated for each specific application to ensure the valve will actuate under all usage conditions. **Contact Factory for more details.**

## C21 Miniature Cartridge Valve

### Accessories

#### C21 Evaluation Manifold with clip and screw (Valve not included)

C21-MCS



#### Replacement Clip for C21-MCS

C21-C



#### Replacement Screw for C21-MCS

C21-S



#### Replacement O-Ring for C21 Valve, Large

C21-LG



#### Replacement FKM O-Ring for C21 Valve, Small

C21-SM



## C21 Miniature Cartridge Valve

### Ordering Information

Sample Part ID	C21	-	2	24	FK	10	F	F	-	000
Description	Series		Configuration	Coil Voltage	Elastomer	Orifice	Mounting Style	Electrical Interface		Custom
Options	C21: 15 mm Cartridge Valve		2: 2-Way	12: 12 VDC	EP: EPDM	10: 0.040 in (1.0 mm)	F: Face Seal	F: 3.2 in (80 mm) flying lead		000: Standard
			3: 3-Way	24: 24 VDC	FK: FKM	20: 0.080 in (2.0 mm)				
						30: 0.12 in (3.0 mm)				
						40: 0.16 in (4.0 mm)				

#### Accessories

C21-MCS: C21 Evaluation Manifold with Clip and Screw, Not supplied with the valve.

C21-C: Replacement Clip used on C21-MCS\*

C21-S: Replacement Screw used on C21-MCS\*

C21-LG: Spare O-Ring for C21 Valve, Large\*\*

C21-SM: Spare O-Ring for C21 Valve, Small\*\*

\* Not Supplied with Valve, Replacement Part for C21-MCS \*\* Supplied with Valve

**NOTE: For Evaluation - Please Add C21-MCS To Your Sample Order. All Valves Ship With O-Rings Installed**

NOTE: In order to provide the best possible solution for your application, please provide the following requirements when contacting Applications Engineering:

- Media, Inlet & Outlet Pressures
- Minimum Required Flow Rate
- System Supply Voltage
- Media & Ambient Temperature Range



Please click on the Order On-line button to configure your C21 valve. For CAD models and more detailed information, please visit us on the Web ([www.parker.com/precisionfluidics/C21\\_GasCartridgeValve](http://www.parker.com/precisionfluidics/C21_GasCartridgeValve)), call (+1.603.595.1500) or email at [ppfinfo@parker.com](mailto:ppfinfo@parker.com).

Parker Hannifin Precision Fluidics Division reserves the right to make changes. Drawings are for reference only.


For more information call +1 603 595 1500 or email [ppfinfo@parker.com](mailto:ppfinfo@parker.com)  
Visit [www.parker.com/precisionfluidics](http://www.parker.com/precisionfluidics)



# Series 11

## Miniature Pneumatic Solenoid Valve

### 15 mm Solenoid Valve




The Series 11 miniature pneumatic solenoid valve is a robust and proven product with a reputation for reliable and consistent performance. The Series 11 miniature solenoid valve is the preferred choice of major OEM's in the medical and analytical market. With valve bodies made from brass or stainless steel, the Series 11 miniature solenoid valve is an ideal solution for general purpose applications and those applications requiring low out-gassing and a bubble-tight seal.

### Applications

- Oxygen Conservers
- Oxygen Concentrators
- Compression Therapy
- Gas Chromatography
- Insufflators
- Medical & Analytical Gas Control

### Features

- Proven performance tested to 260 million life cycles
- Wide range of available electrical connections to simplify valve integration and control
- Manifold mount or barbed tube pneumatic configurations available for added system design flexibility
- Available Analytical and Oxygen Service Clean to minimize contamination
- RoHS compliant 

## Product Specifications

### Mechanical

#### Valve Type:

Solenoid-actuated poppet style  
 - 2/3 Port, Normally Closed (NC)  
 - 2/3 Port, Normally Open (NO)  
 - 3 Port, Distributor  
 - 2 Port, Normally Closed (NC) - Universal

#### Media:

Air, argon, helium, hydrogen, methane, nitrogen, oxygen, & other non-reacting gasses

#### Operating Environment:

32 to 158°F (0 to 70°C)

#### Storage Temperature:

-40 to 158°F (-40 to 70°C)

#### Dimensions:

- Length: 1.73 in (43.9 mm)  
 - Width: 0.63 in (15.8 mm)  
 - Height: 0.67 in (17.0 mm)

#### Weight:

2.1 oz (60 g)

#### Internal Volume:

0.026 in<sup>3</sup> (0.426 cm<sup>3</sup>)

#### Filtration:

40 micron (recommended)

#### Oxygen Clean:

Call For Details

### Electrical

#### Power Options:

0.5, 1.0, or 2.0 Watts

#### Voltage Options:

5, 12 or 24 VDC  
 Further power reduction may be achieved through the use of spike and hold or PWM electrical control.

#### Electrical Connections:

Wire Leads, PC Pins, Solder Tabs, Quick Disconnect Spade

### Wetted Materials

#### Body:

36000 HO2 Brass;  
 303 Series Stainless Steel

#### Stem Base:

36000 HO2 Brass;  
 303 Series Stainless Steel

#### Poppet Options:

FKM

#### All Others:

430 FR Series Stainless Steel  
 302 Series Stainless Steel

### Performance Characteristics

#### Leak Rate:

<0.016 sccm of air  
 1.0 sccm of air (Model 20 only)

#### Response:

<30 ms cycling

#### Pressure:

0 to 100 psig (6.9 bar)


#### Vacuum:

0-27 in Hg (686 mm Hg)

#### Orifice Sizes:

0.030" (0.76 mm)  
 0.050" (1.27 mm)  
 0.102" (2.59 mm)

## Series 11 Miniature Pneumatic Solenoid Valve Typical Flow Curve

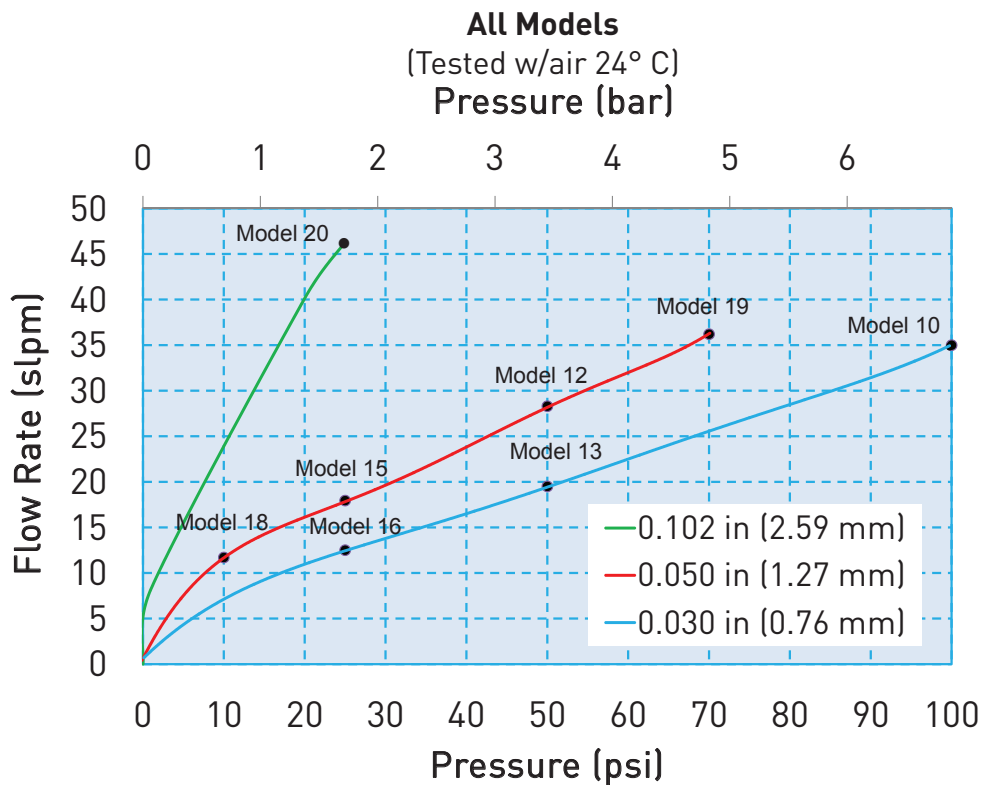

All models reflect typical flow output capability based on rated pressure

### Pressure and Flow Capabilities/Life Requirements

Model No.	Orifice Size	Nominal Cv	Maximum Supply Pressure	Leak Rate (Air)	Power Consumption	Elastomer	Life Requirements (millions of cycles)*
10	0.030 in (0.76 mm)	0.017	100 psi (6.89 bar)	<0.016 sccm	2 Watts	FKM	100
12	0.050 in (1.27 mm)	0.031	50 psi (3.45 bar)	<0.016 sccm	2 Watts	FKM	100
13	0.030 in (0.76 mm)	0.017	50 psi (3.45 bar)	<0.016 sccm	1 Watt	FKM	200
15	0.050 in (1.27 mm)	0.025	25 psi (1.72 bar)	<0.016 sccm	1 Watt	FKM	200
16	0.030 in (0.76 mm)	0.017	25 psi (1.72 bar)	<0.016 sccm	0.5 Watt	FKM	260
18	0.050 in (1.27 mm)	0.021	10 psi (0.69 bar)	<0.016 sccm	0.5 Watt	FKM	260
19	0.050 in (1.27 mm)	0.025	70 psi (4.83 bar)	<0.016 sccm	2 Watts	FKM	20
20	0.102 in (2.59 mm)	0.069	25 psi (1.72 bar)	1.0 sccm	1 Watt	FKM	25

\*Life is dependent upon elastomeric material, duty cycle and pressures

For custom requirements please contact Applications Engineering at 603-595-1500 or [ppinfo@parker.com](mailto:ppinfo@parker.com)




## Series 11 Miniature Pneumatic Solenoid Valve Pneumatic Interface

### Manifold Mount




## Mechanical Integration Dimensions

### Basic Dimensions, 2-Way Valve Configuration

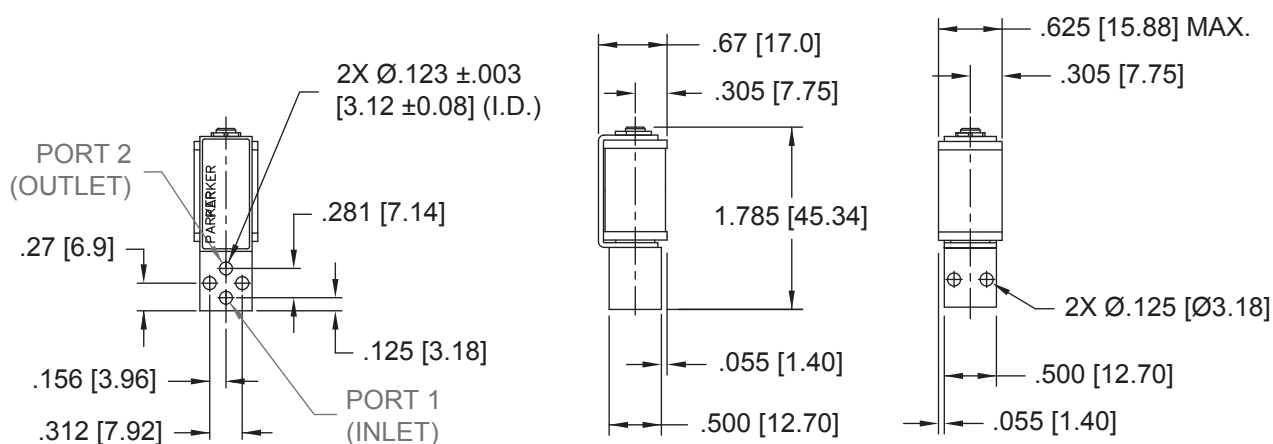

UNITS
IN. [mm.]

### Basic Dimensions, 3-Way Valve Configuration

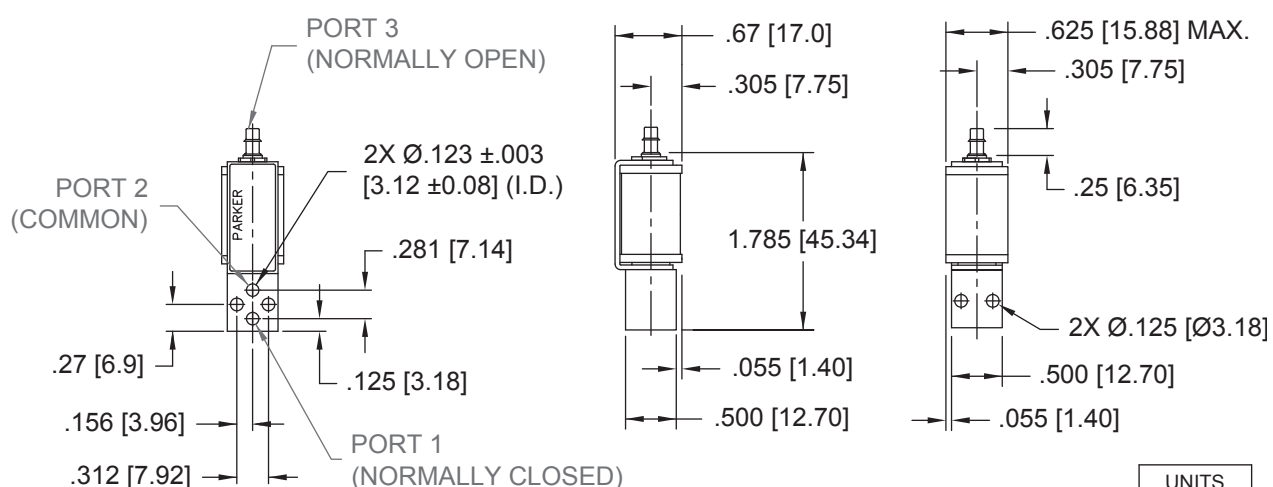

UNITS
IN. [mm.]



## Series 11 Miniature Pneumatic Solenoid Valve Pneumatic Interface


### Barbed



### Barb Options


#### 1/16" (1.5 mm) Barbs

( For 1/16" (1.5 mm) I.D. Tubing )

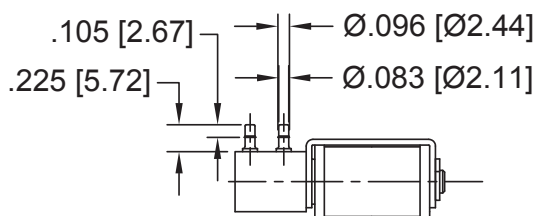


#### 5/64" (2 mm) Barbs

( For 5/64" (2 mm) I.D. Tubing )

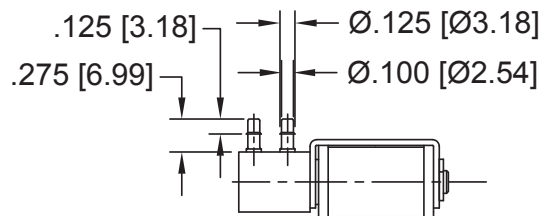

#### 1/8" (3 mm) Barbs


( For 1/8" (3 mm) I.D. Tubing )

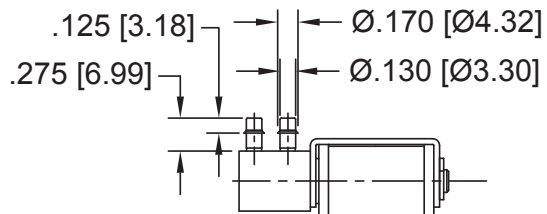




## Series 11 Miniature Pneumatic Solenoid Valve Electrical Interface


### Coil Type: Wire Leads (See Order Info "F")

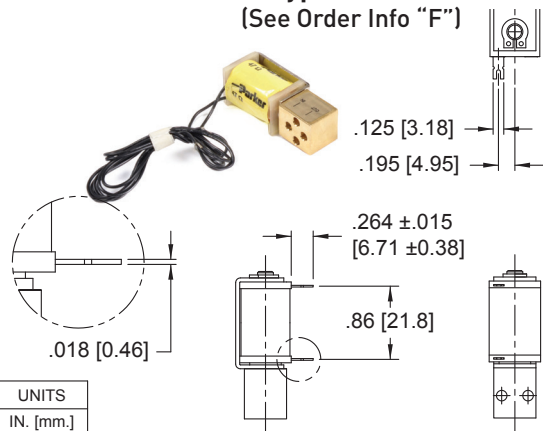

### Coil Type: Quick Connect Spade (See Order Info "Q")

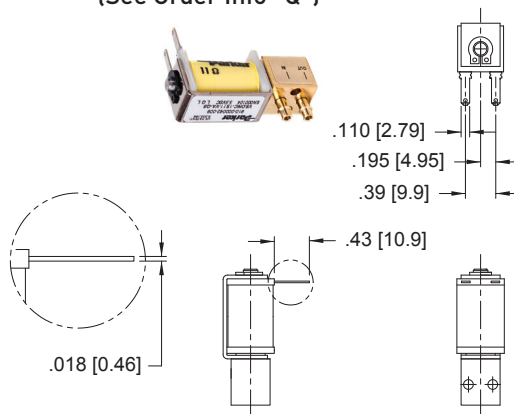


### Coil Type: Solder Tab (See Order Info "S")

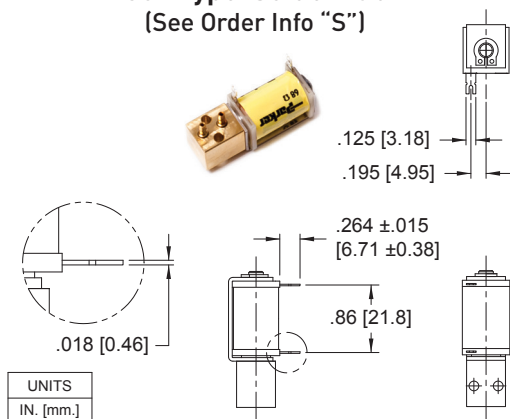


### Coil Type: 4 PC Pins\* (See Order Info "P")

\*See Isometric Drawing below

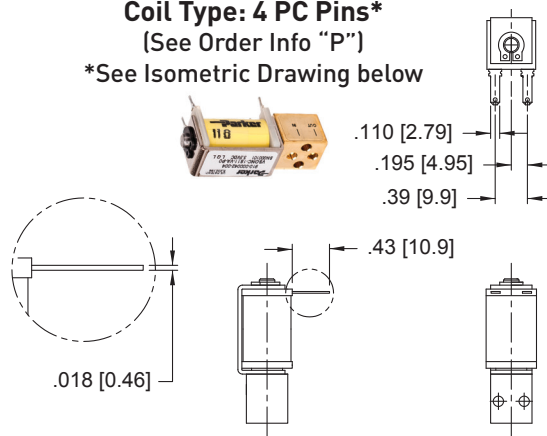

### \*4 PC PIN PCB Interface

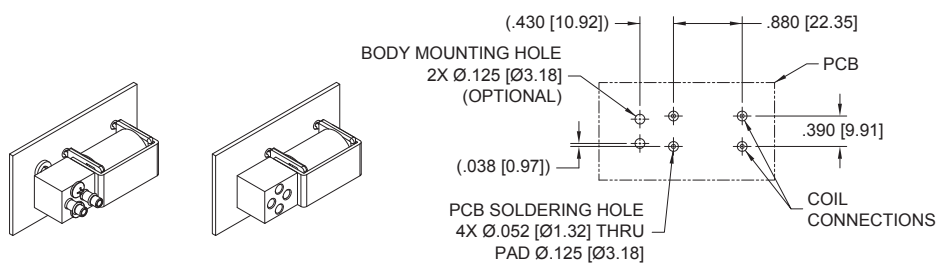


# Series 11 Miniature Pneumatic Solenoid Valve

## ANSI Symbols


LEGEND:	
SUPPLY:	Pneumatic Source or Supply Pressure
EXHAUST:	Exhaust to Atmospheric Pressure
REQMT:	Customer Requirement or Application
ATM:	Atmospheric Pressure

### Pneumatic Schematics by Valve Types

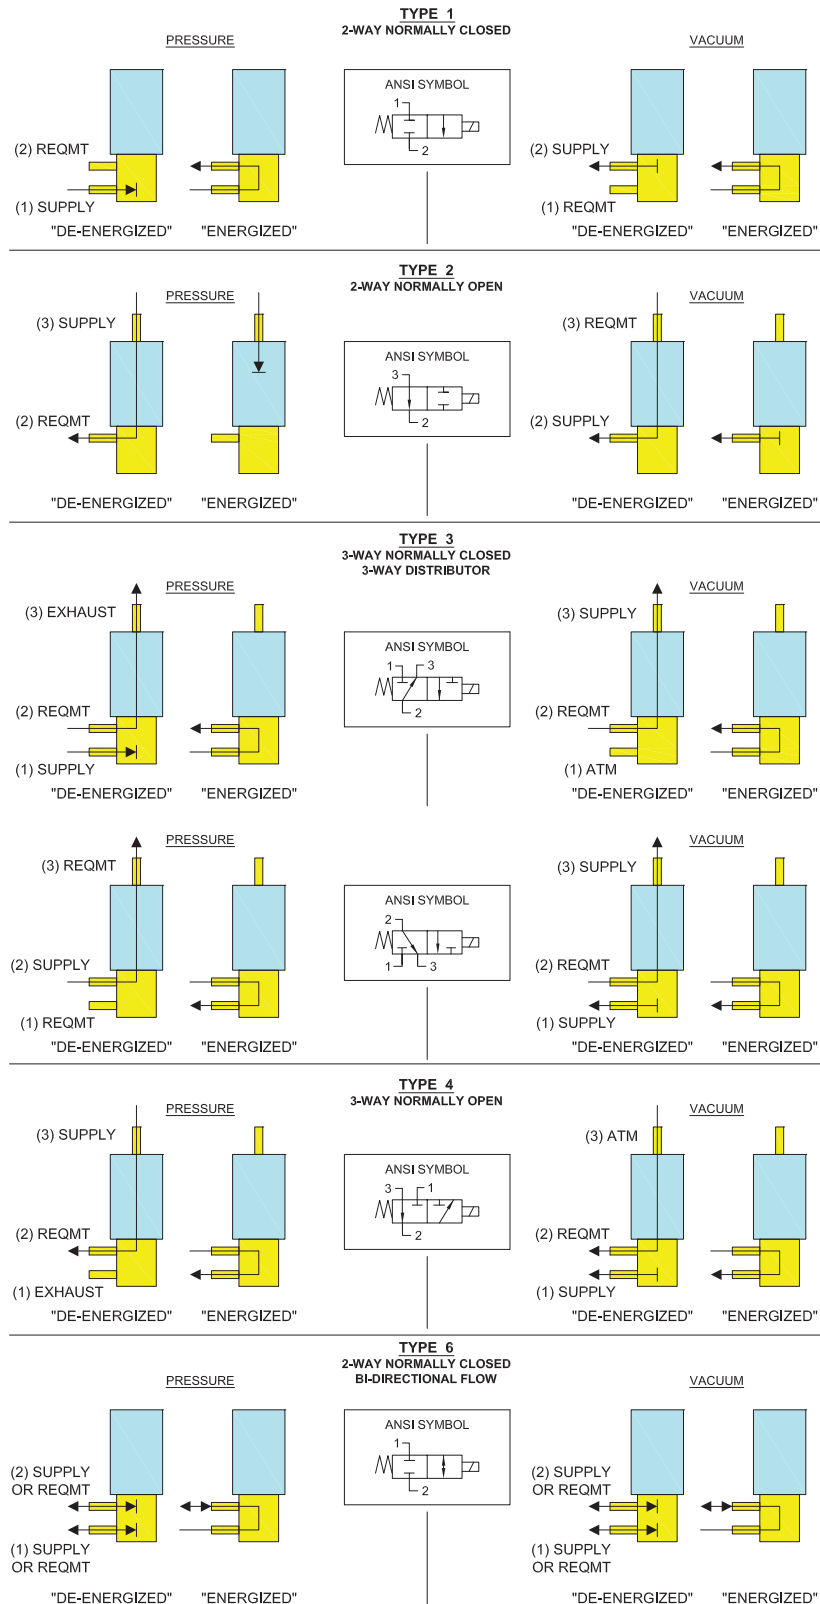

## Series 11 Miniature Pneumatic Solenoid Valve Installation and Use

### Manifold & O-Ring Dimensions & Design

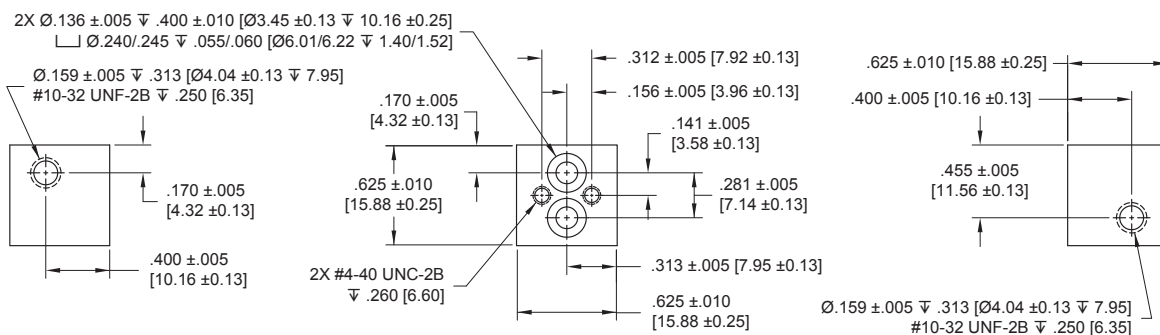


## Accessories

### O-Ring (Manifold Seal) Dimensions

(see Accessories table below  
for part numbers)



I.D. =  $\varnothing.114 \pm 0.005$  [ $\varnothing 2.90 \pm 0.13$ ]  
 W =  $.070 \pm 0.003$  [1.78  $\pm 0.08$ ]  
 O.D. =  $\varnothing.254$  [ $\varnothing 6.45$ ] REFERENCE



### Body Standoff

890-000027-001

(2 required for each valve)



### Screw 4-40 x 1/2" Pan Head

191-000100-208

(2 required for each valve)



## Series 11 Miniature Pneumatic Solenoid Valve

### Ordering Information

Sample Part ID	11	10	3	BV	12	P	7	7
Description	Series	Model Number Pressure / Orifice / Power	Type	Material XX: Body / Poppet & Seal	Voltage	Electrical Coil Connection	Pneumatic Connection Body	Pneumatic Connection Stem
Options	11	10: 0-100 psi / 0.030" / 2 Watts 12: 0-50 psi / 0.050" / 2 Watts 13: 0-50 psi / 0.030" / 1 Watt 15: 0-25 psi / 0.050" / 1 Watt 16: 0-25 psi / 0.030" / 0.5 Watt 18: 0-10 psi / 0.050" / 0.5 Watt 19: 0-70 psi / 0.050" / 2 Watts 20: 0-25 psi / 0.102" / 1 Watt	1: 2-Way NC 2: 2-Way NO 3: 3-Way NC or Distributor 4: 3-Way NO 6: 2-Way NC Universal <sup>(1)</sup>	BV: Brass / FKM <sup>(2)</sup> SV: Stainless Steel / FKM	5: 5 VDC 12: 12 VDC 24: 24 VDC	F: Wire Leads, 18", No Termination P: PC Mount, 4 PC Pins S: PC Mount, 2 Solder Tabs Q: Quick Connect Spade	0: Manifold Mount <sup>(3)</sup> 6: 1/16" (1.5 mm) Barbs 7: 5/64" (2 mm) Barbs 8: 1/8" (3 mm) Barbs	0: Manifold Mount <sup>(4)</sup> 6: 1/16" (1.5 mm) Barbs <sup>(5)</sup> 7: 5/64" (2 mm) Barbs 8: 1/8" (3 mm) Barbs
			<sup>(1)</sup> Model 20 (0.102" orifice) only available in 2-Way NC Universal configuration	<sup>(2)</sup> Model 20 (0.102" orifice) only available in Brass/FKM configuration			<sup>(3)</sup> Model 20 (0.102" orifice) only available in manifold mount body	<sup>(4)</sup> Type 1 and 6 configurations only <sup>(5)</sup> Not available on Models 12, 15, 18 and 19 (0.050" orifice)

Accessories	
190-007024-001: O-ring, Buna-N	* Used as a seal between the manifold and valve body
190-007024-002: O-ring, FKM *	** Used to create a flush mount between the coil and valve body
890-000027-001: Body Standoff **	
191-000115-010: Screw, 4-40 x 5/8" Pan Head, Phillips	



NOTE: In order to provide the best possible solution for your application, please provide the following requirements when contacting Applications Engineering:

- Media, Inlet & Outlet Pressures
- Minimum Required Flow Rate
- System Supply Voltage
- Media
- Ambient Temperature Range


Please click on the Order On-line button (or go to [www.parker.com/precisionfluidics/s11](http://www.parker.com/precisionfluidics/s11)) to configure your Series 11 Miniature Pneumatic Solenoid Valve. For more detailed information, visit us on the Web, or call and refer to Performance Spec. #790-002075-001 and #790-002407-001 (Model 20 only) and Drawing #890-003016-001.

For more information call +1 603 595 1500 or email [ppfinfo@parker.com](mailto:ppfinfo@parker.com)  
Visit [www.parker.com/precisionfluidics](http://www.parker.com/precisionfluidics)



# Series 25 Miniature Pneumatic Solenoid Valve

## 15 mm Solenoid Valve

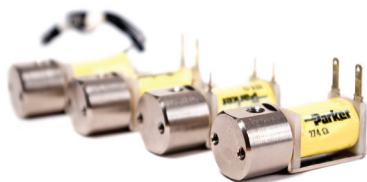

### Applications

- Oxygen Conservers and Concentrators
- Sieve Bed Switching
- Anesthesia Delivery
- Compression Therapy
- Gas Chromatography
- Insufflators
- Flow Control/Shut-off


## Product Specifications

### Mechanical

<b>Valve Type:</b>
2/3 Port, Direct-acting poppet style
- Normally Closed (NC)
- Normally Open (NO)
- Distributor
<b>Media:</b>
Air, argon, helium, hydrogen, methane, nitrogen, oxygen, & other non-reacting gasses
<b>Operating Environment:</b>
32 to 158°F (0 to 70°C)
<b>Storage Temperature:</b>
-40 to 158°F (-40 to 70°C)
<b>Dimensions:</b>
- Length: 1.73 in (43.9 mm)
- Width: 0.63 in (15.8 mm)
- Height: 0.67 in (17.0 mm)
<b>Weight:</b>
2.1 oz (60 g)
<b>Internal Volume:</b>
0.026 in <sup>3</sup> (0.426 cm <sup>3</sup> )
<b>Filtration:</b>
40 micron (recommended)
<b>Oxygen Clean:</b>
Call For Details

The Series 25 miniature pneumatic solenoid valve is a robust and proven product with a reputation for reliable and consistent performance. The Series 25 miniature solenoid valve is the preferred choice of major OEM's in the medical and analytical market. With valve bodies made from nickel-plated brass and multiple pneumatic and electrical interface options, the Series 25 miniature solenoid valve is the ideal solution for general purpose applications and those applications requiring low out-gassing and a bubble-tight seal.

### Features

- Proven performance tested to 260 million life cycles
- Wide range of available electrical connections to simplify valve integration and control
- Manifold mount or barbed tube pneumatic configurations available or added system design flexibility
- Available Analytical and Oxygen Service Clean to minimize contamination
- RoHS compliant 

### Electrical

<b>Power Options:</b>
0.5, 1.0 or 2.0 Watts
<b>Voltage Options:</b>
5, 12 or 24 VDC
Further power reduction may be achieved through the use of spike and hold or PWM electrical control.
<b>Electrical Connections:</b>
Wire Leads, PC Pins, Solder Tabs, Quick Disconnect Spade

### Wetted Materials


<b>Body:</b>
36000 HO2 Brass, Nickel Plated
<b>Stem Base:</b>
36000 HO2 Brass;
<b>Poppet Options:</b>
FKM
<b>All Others:</b>
430 FR Series Stainless Steel
302 Series Stainless Steel
36000 HO2 Brass, Nickel Plated

### Performance Characteristics

<b>Leak Rate:</b>
<0.016 sccm of air (bubble tight)
<b>Response:</b>
<30 ms cycling
<b>Pressure:</b>
0 to 100 psig (6.9 bar)
<b>Vacuum:</b>
0-27 in Hg (686 mm Hg)
<b>Orifice Sizes:</b>
0.030" (0.76 mm)
0.050" (1.27 mm)

## Series 25 Miniature Pneumatic Solenoid Valve

### Typical Flow Curve

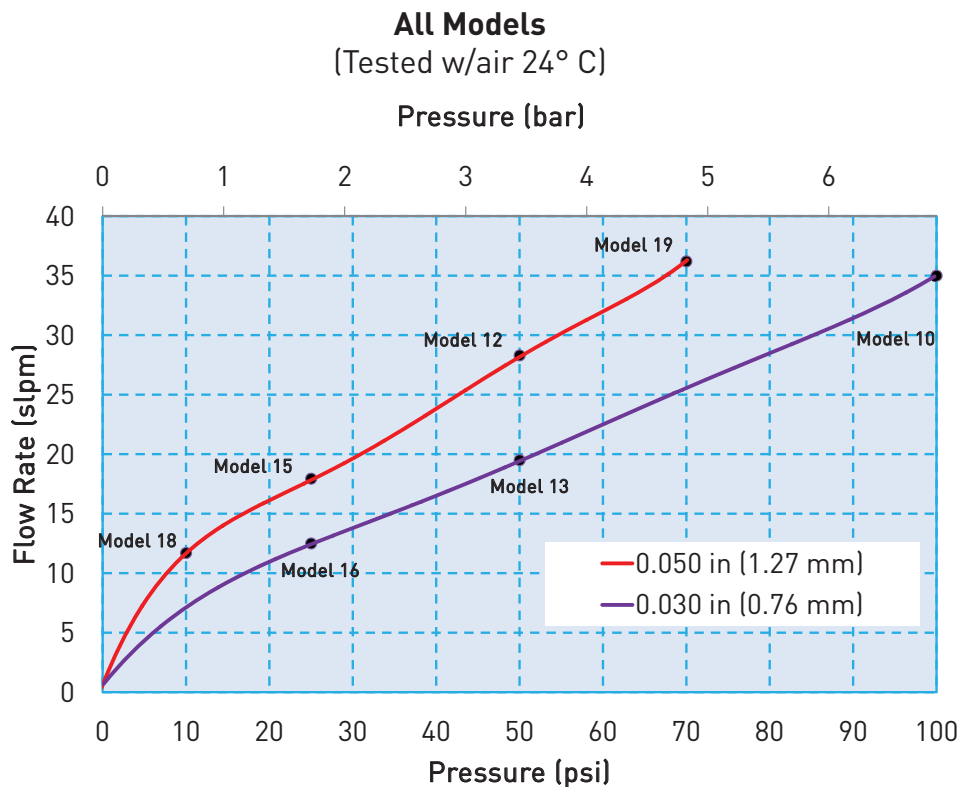

All models reflect typical flow output capability based on rated pressure

### Pressure and Flow Capabilities/Life Requirements

Model No.	Orifice Size	Nominal Cv	Maximum Supply Pressure	Power Consumption	Elastomer	Life Requirements (millions of cycles*)
10	0.030 in (0.76 mm)	0.017	100 psig (6.9 bar)	2 Watts	FKM	100
12	0.050 in (1.27 mm)	0.031	50 psig (3.5 bar)	2 Watts	FKM	100
13	0.030 in (0.76 mm)	0.017	50 psig (3.5 bar)	1 Watt	FKM	200
15	0.050 in (1.27 mm)	0.025	25 psig (1.7 bar)	1 Watt	FKM	200
16	0.030 in (0.76 mm)	0.017	25 psig (1.7 bar)	0.5 Watt	FKM	260
18	0.050 in (1.27 mm)	0.021	10 psig (0.7 bar)	0.5 Watt	FKM	260
19	0.050 in (1.27 mm)	0.025	70 psig (4.8 bar)	2 Watts	FKM	20

\*Life is dependent upon elastomeric material, duty cycle and pressures

For custom requirements please contact Applications Engineering at 1-603-595-1500 or [ppinfo@parker.com](mailto:ppinfo@parker.com)




## Series 25 Miniature Pneumatic Solenoid Valve


### Mechanical Integration

#### Dimensions

#### Basic Dimensions, 2-Way Valve Configuration

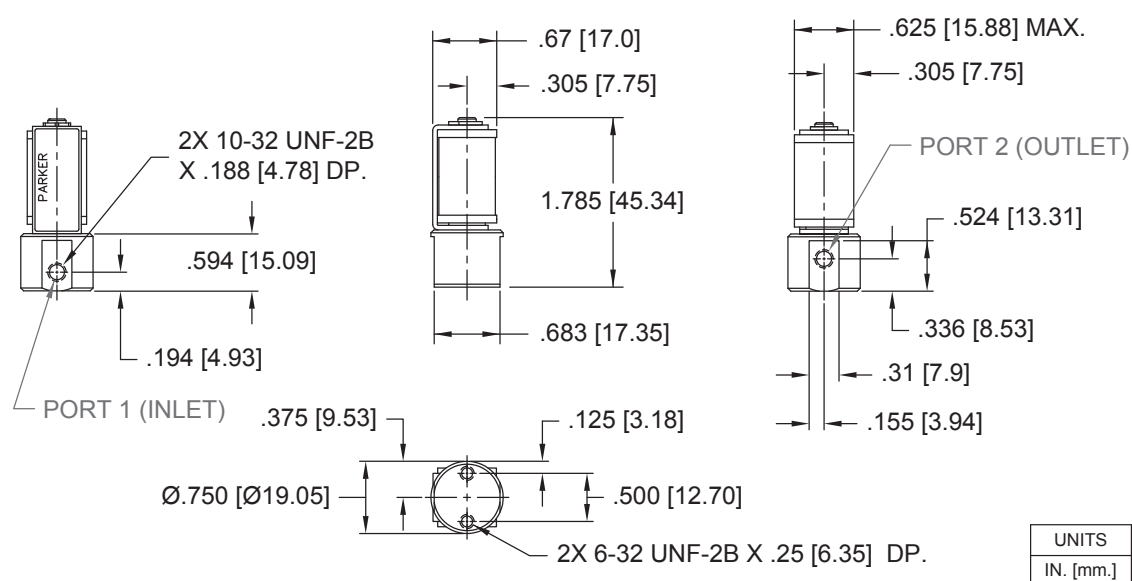


#### Basic Dimensions, 3-Way Valve Configuration

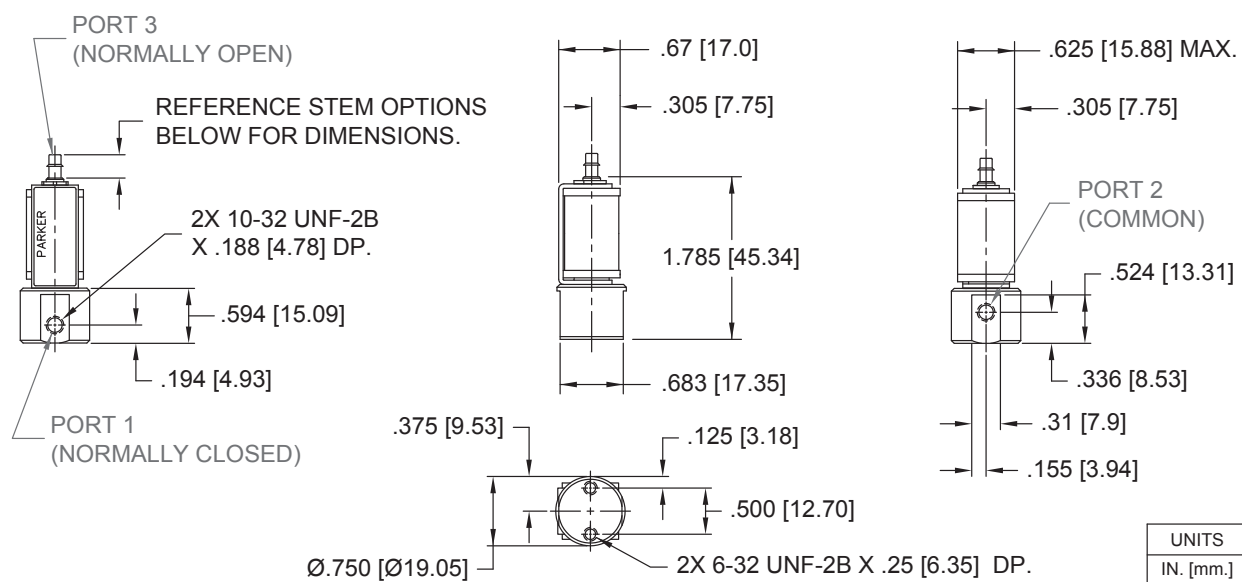


## Series 25 Miniature Pneumatic Solenoid Valve

### Mechanical Integration Dimensions

#### Stem Options





\*Torque applied to #10-32 male fitting not to exceed 0.5 in-oz (3.5 mN-m). Use Loctite 290 or compatible liquid-curing fastener to secure mating fitting in place.





\*\*Torque applied to #10-32 Female fitting not to exceed 0.5 in-oz (3.5 mN-m). Use 1/4 inch hex wrench to support the fitting when installing a mating, #10-32 male fitting.

#### Barb Options



**1/16" (1.5 mm) Barb**  
( For 1/16" (1.5 mm) I.D. Tubing )  
(OPTION #6)



**5/64" (2 mm) Barb**  
( For 5/64" (2 mm) I.D. Tubing )  
(OPTION #7)



**1/8" (3 mm) Barb**  
( For 1/8" (3 mm) I.D. Tubing )  
(OPTION #8)







## Series 25 Miniature Pneumatic Solenoid Valve

### Electrical Interface


#### Coil Type: Wire Leads (See Order Info "F")

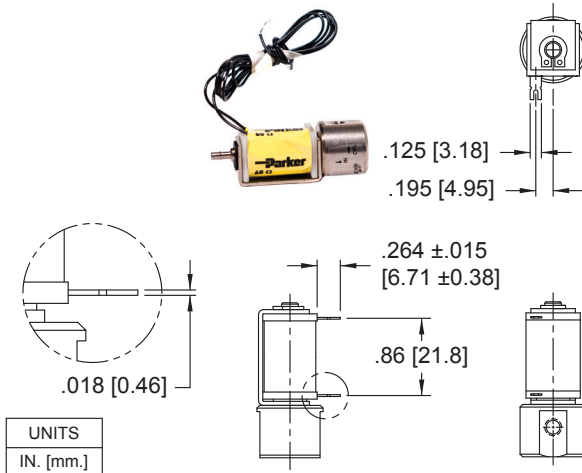

#### Coil Type: Quick Connect Spade (See Order Info "Q")

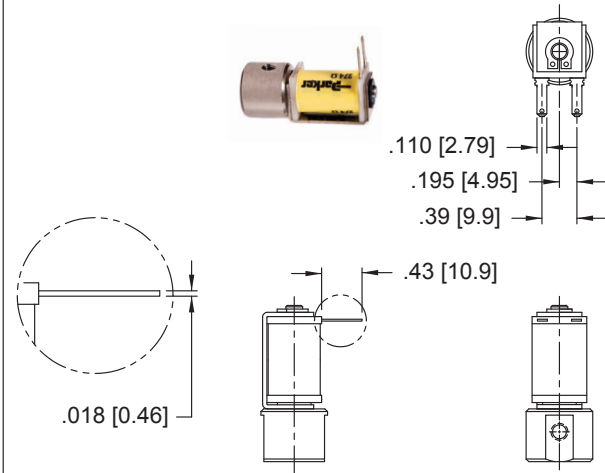


#### Coil Type: Solder Tab (See Order Info "S")

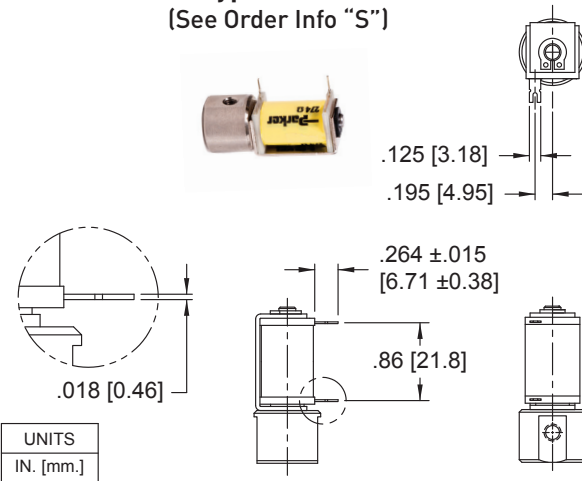


#### Coil Type: 4 PC Pins\* (See Order Info "P")

\*See Isometric Drawing below

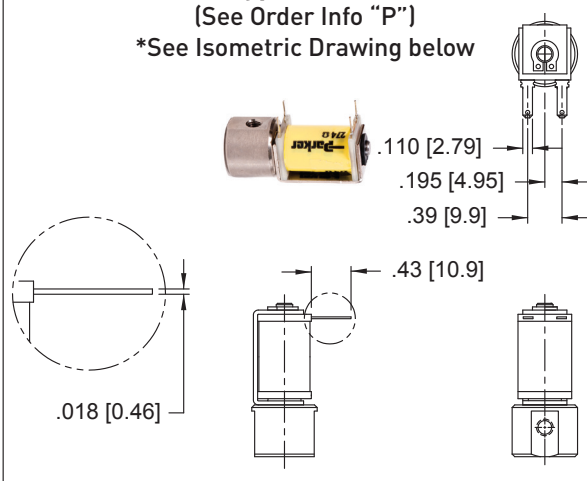


#### \*4 PC PIN PCB Interface

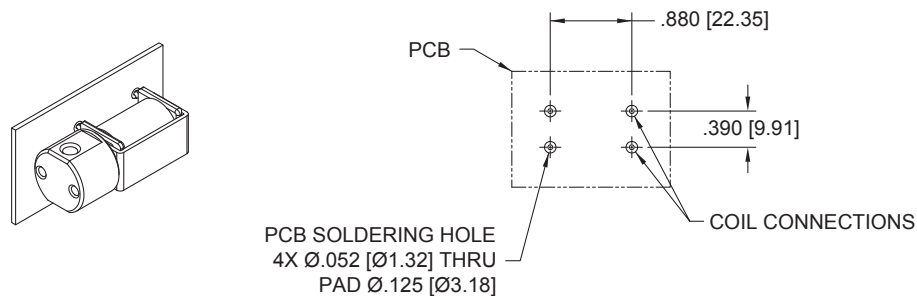

# Series 25 Miniature Pneumatic Solenoid Valve ANSI Symbols

LEGEND:	
SUPPLY:	Pneumatic Source or Supply Pressure
EXHAUST:	Exhaust to Atmospheric Pressure
REQMT:	Customer Requirement or Application
ATM:	Atmospheric Pressure

## Pneumatic Schematics by Valve Types

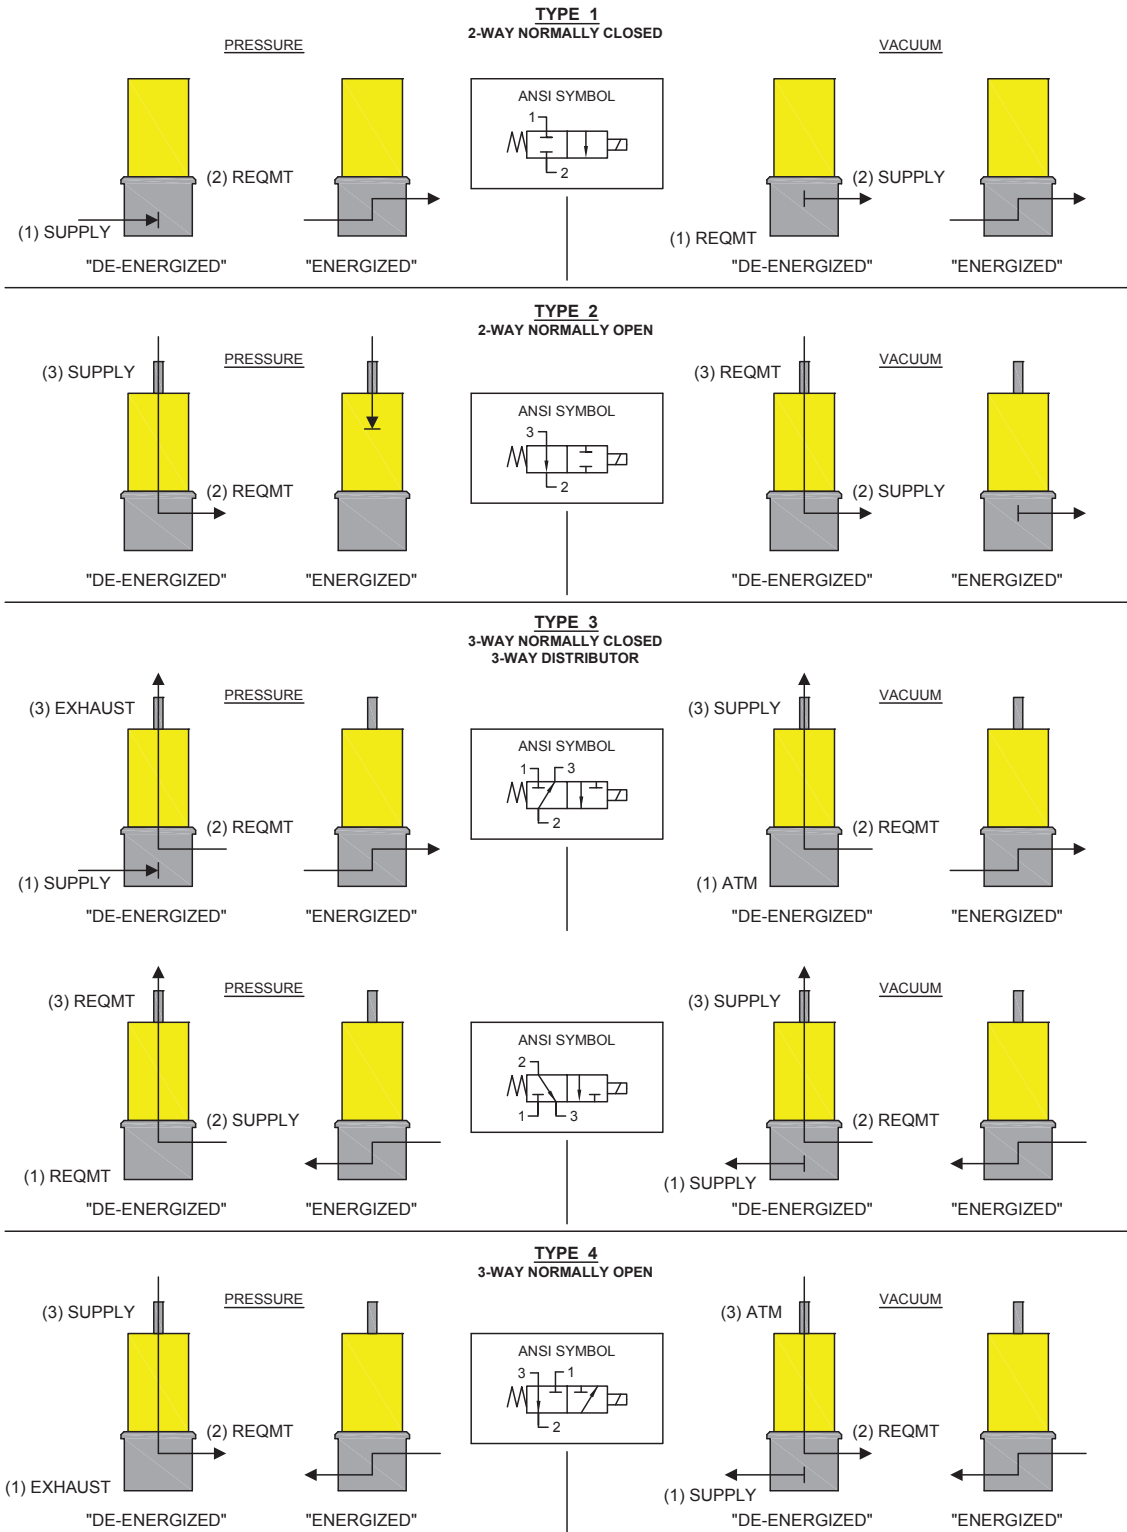

## Series 25 Miniature Pneumatic Solenoid Valve

### Ordering Information

Sample Part ID	25	10	3	NV	12	P	5	7
Description	Series	Model Number: Pressure / Orifice / Power	Type	Material XX: Body / Poppet & Seal	Voltage	Electrical Coil Selection	Pneumatic Connection Body	Pneumatic Connection Stem
Options	25	10: 0-100 psi / 0.030" orifice / 2 Watts 12: 0-50 psi / 0.050" orifice / 2 Watts 13: 0-50 psi / 0.030" orifice / 1 Watt 15: 0-25 psi / 0.050" orifice / 1 Watt 16: 0-25 psi / 0.030" orifice / 0.5 Watt 18: 0-10 psi / 0.050" orifice / 0.5 Watt 19: 0-70 psi / 0.050" orifice / 2 Watts	1: 2-Way NC 2: 2-Way NO 3: 3-Way NC or Distributor 4: 3-Way NO	NV: Nickel-plated Brass / FKM	5: 5 VDC 12: 12 VDC 24: 24 VDC	F: Wire Leads, 18", No Termination P: PC Mount, 4 PC Pins S: PC Mount, 2 Solder Tabs Q: Quick Connect Spade	5: 10-32 Female	0: Manifold Mount (2-Way NC Only) 4: 10-32 Male 5: 10-32 Female 6: 1/16" (1.5mm) Barbs* 7: 5/64" (2 mm) Barbs 8: 1/8" (3 mm) Barbs  *1/16" Barbs not available for 0.050" orifice valves

NOTE: In order to provide the best possible solution for your application, please provide the following requirements when contacting Applications Engineering:

- Media, Inlet & Outlet Pressures
- Minimum Required Flow Rate
- System Supply Voltage
- Media
- Ambient Temperature Range



Please click on the Order On-line button (or go to [www.parker.com/precisionfluidics/s11](http://www.parker.com/precisionfluidics/s11)) to configure your Series 25 Miniature Pneumatic Solenoid Valve. For more detailed information, visit us on the Web, or call and refer to Performance Spec. #790-002075-001 and Drawing #890-003017-001.

For more information call +1 603 595 1500 or email [ppfinfo@parker.com](mailto:ppfinfo@parker.com)  
Visit [www.parker.com/precisionfluidics](http://www.parker.com/precisionfluidics)



# Series 26 Miniature Pneumatic Solenoid Valve

## 15 mm Solenoid Valve




The Series 26 miniature pneumatic solenoid valve is a robust and proven product with a reputation for reliable and consistent performance. The Series 26 miniature solenoid valve is the preferred choice of major OEM's in the medical and analytical market. With valve bodies made from nickel-plated brass and multiple pneumatic and electrical interface options, the Series 26 miniature solenoid valve is the ideal solution for general purpose applications and those applications requiring low out-gassing and a bubble-tight seal.

### Applications

- Oxygen Conservers and Concentrators
- Sieve Bed Switching
- Anesthesia Delivery
- Compression Therapy
- Gas Chromatography
- Insufflators
- Flow Control/Shut-off

### Features

- Proven performance tested to 260 million life cycles
- Wide range of available electrical connections to simplify valve integration and control
- Manifold mount body interface simplifies the manifold design and eases valve installation
- Available Analytical and Oxygen Service Clean to minimize contamination
- RoHS compliant 

## Product Specifications

### Mechanical

#### Valve Type:

2/3 Port, Direct-acting poppet style  
 - Normally Closed (NC)  
 - Normally Open (NO)  
 - Distributor

#### Media:

Air, argon, helium, hydrogen, methane, nitrogen, oxygen, & other non-reacting gasses

#### Operating Environment:

32 to 158°F (0 to 70°C)

#### Storage Temperature:

-40 to 158°F (-40 to 70°C)

#### Dimensions:

Length: 1.53 in (38.8 mm)  
 Diameter: 0.75 in (19.0 mm)

#### Weight:

2.1 oz (60 g)

#### Internal Volume:

0.026 in<sup>3</sup> (0.426 cm<sup>3</sup>)

#### Filtration:

40 micron (recommended)

#### Oxygen Clean:

Call For Details

### Electrical

#### Power Options:

0.5, 1.0 or 2.0 Watts

#### Voltage Options:

5, 12 or 24 VDC  
 Further power reduction may be achieved through the use of spike and hold or PWM electrical control.

#### Electrical Connections:

Wire Leads, PC Pins, Solder Tabs, Quick Disconnect Spade

### Wetted Materials

#### Body:

36000 HO2 Brass, Nickel Plated

#### Stem Base:

36000 HO2 Brass;

#### Poppet Options:

FKM

#### All Others:

430 FR Series Stainless Steel  
 302 Series Stainless Steel  
 36000 HO2 Brass, Nickel Plated

### Performance Characteristics

#### Leak Rate:

<0.016 sccm of air (bubble tight)

#### Response:

<30 ms cycling

#### Pressure:

0 to 100 psig (6.9 bar)

#### Vacuum:


0-27 in Hg (686 mm Hg)

#### Orifice Sizes:

0.030" (0.76 mm)  
 0.050" (1.27 mm)

## Series 26 Miniature Pneumatic Solenoid Valve

### Typical Flow Curve

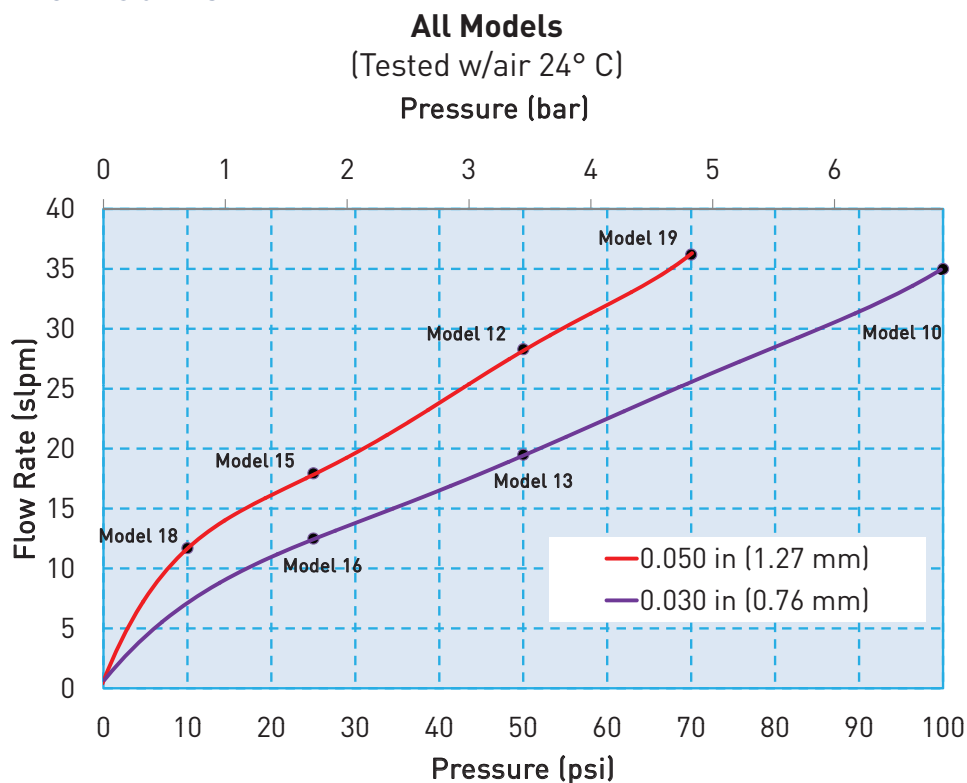

All models reflect typical flow output capability based on rated pressure

### Pressure and Flow Capabilities/Life Requirements

Model No.	Orifice Size	Nominal Cv	Maximum Supply Pressure	Power Consumption	Elastomer	Life Requirements (millions of cycles*)
10	0.030 in (0.76 mm)	0.017	100 psig (6.9 bar)	2 Watts	FKM	100
12	0.050 in (1.27 mm)	0.031	50 psig (3.5 bar)	2 Watts	FKM	100
13	0.030 in (0.76 mm)	0.017	50 psig (3.5 bar)	1 Watt	FKM	200
15	0.050 in (1.27 mm)	0.025	25 psig (1.7 bar)	1 Watt	FKM	200
16	0.030 in (0.76 mm)	0.017	25 psig (1.7 bar)	0.5 Watt	FKM	260
18	0.050 in (1.27 mm)	0.021	10 psig (0.7 bar)	0.5 Watt	FKM	260
19	0.050 in (1.27 mm)	0.025	70 psig (4.8 bar)	2 Watts	FKM	20

\*Life is dependent upon elastomeric material, duty cycle and pressures

For custom requirements please contact Applications Engineering at 1-603-595-1500 or [ppfinfo@parker.com](mailto:ppfinfo@parker.com)




## Series 26 Miniature Pneumatic Solenoid Valve


### Mechanical Integration

#### Dimensions

#### Basic Dimensions, 2-Way Valve Configuration

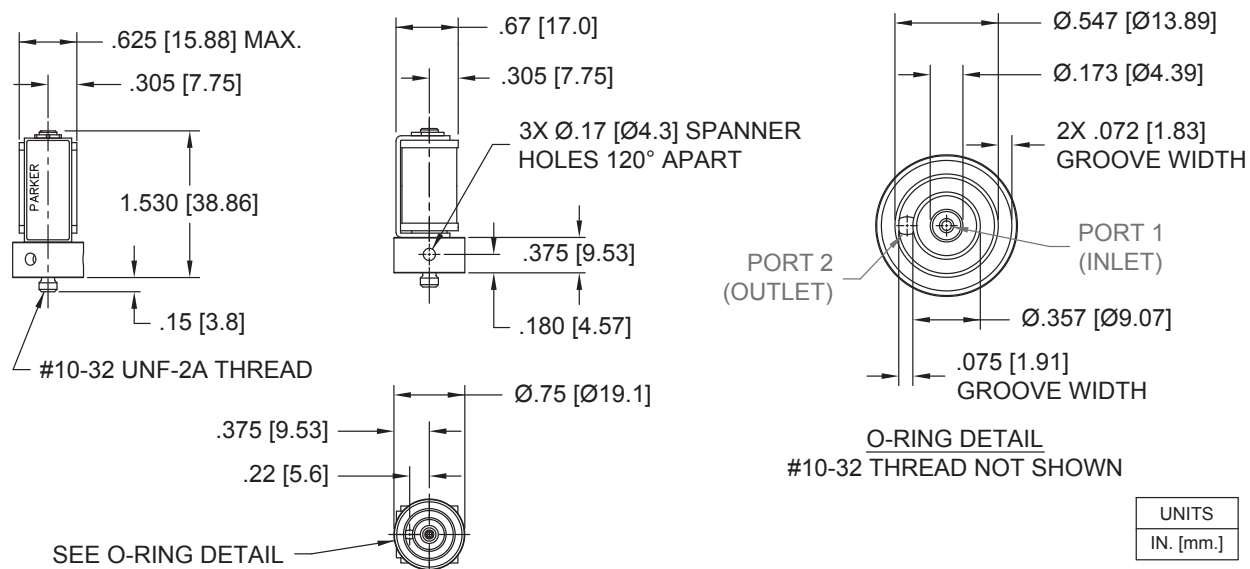


#### Basic Dimensions, 3-Way Valve Configuration

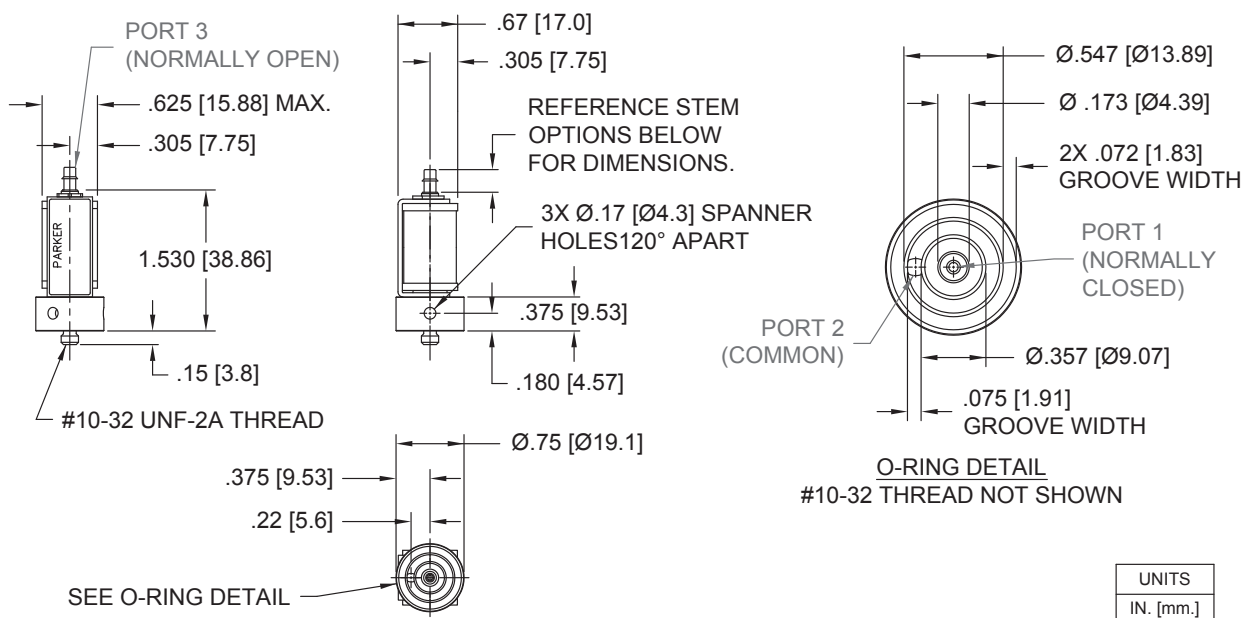


## Series 26 Miniature Pneumatic Solenoid Valve

### Mechanical Integration Dimensions

#### Stem Options





\*Torque applied to #10-32 male fitting not to exceed 0.5 in-oz (3.5 mN-m). Use Loctite 290 or compatible liquid-curing fastener to secure mating fitting in place.





\*\*Torque applied to #10-32 Female fitting not to exceed 0.5 in-oz (3.5 mN-m). Use 1/4 inch hex wrench to support the fitting when installing a mating, #10-32 male fitting.

#### Barb Options



**1/16" (1.5 mm) Barb**  
( For 1/16" (1.5 mm) I.D. Tubing )  
(OPTION #6)



**5/64" (2 mm) Barb**  
( For 5/64" (2 mm) I.D. Tubing )  
(OPTION #7)




**1/8" (3 mm) Barb**  
( For 1/8" (3 mm) I.D. Tubing )  
(OPTION #8)



# Series 26 Miniature Pneumatic Solenoid Valve


## Electrical Interface

**Coil Type: Wire Leads**  
(See Order Info "F")

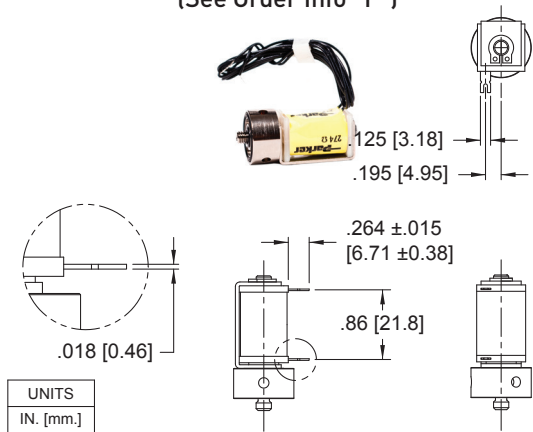


UNITS
IN. [mm.]

**Coil Type: Quick Connect Spade**  
(See Order Info "Q")

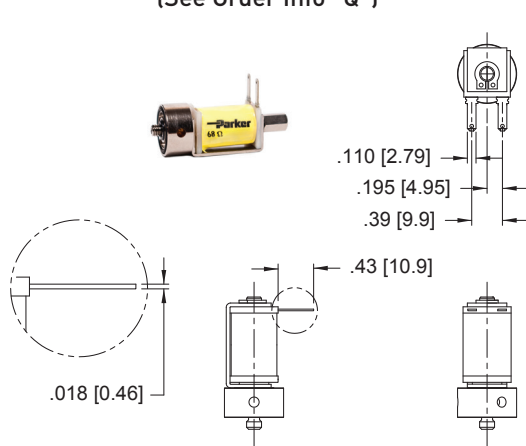


**Coil Type: Solder Tab**  
(See Order Info "S")

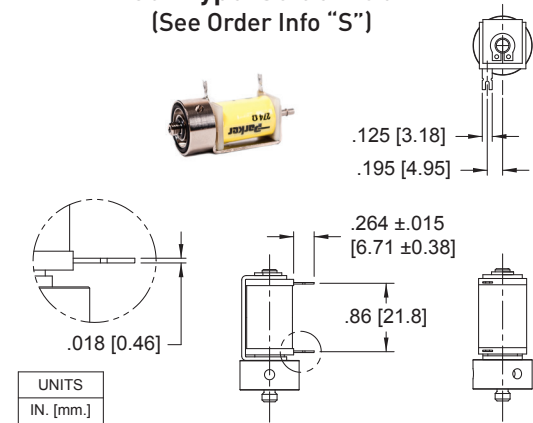


UNITS
IN. [mm.]

**Coil Type: 4 PC Pins\***  
(See Order Info "P")  
\*See Isometric Drawing below

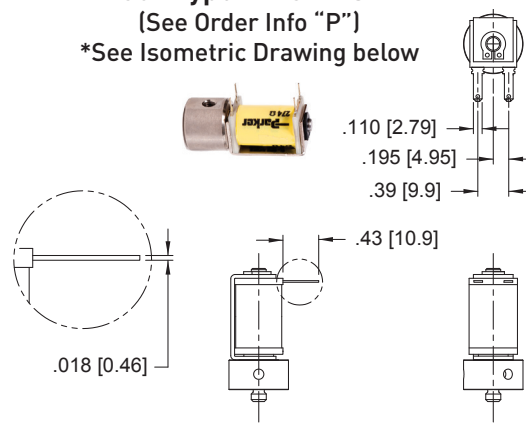

**\*4 PC PIN PCB Interface**

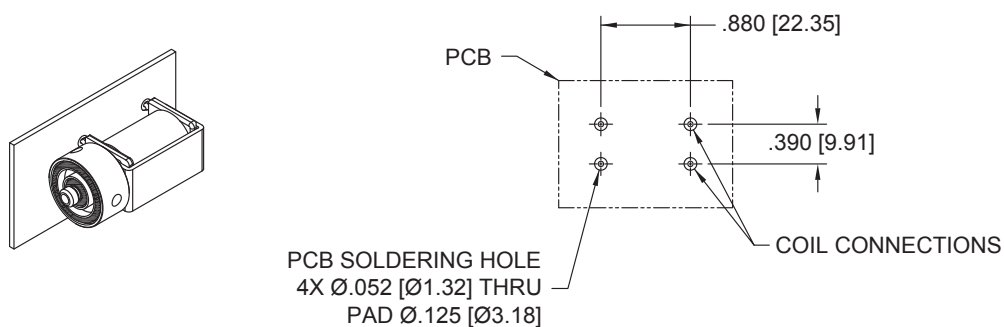




# Series 26 Miniature Pneumatic Solenoid Valve

## ANSI Symbols

LEGEND:	
SUPPLY:	Pneumatic Source or Supply Pressure
EXHAUST:	Exhaust to Atmospheric Pressure
REQMT:	Customer Requirement or Application
ATM:	Atmospheric Pressure

### Pneumatic Schematics by Valve Types

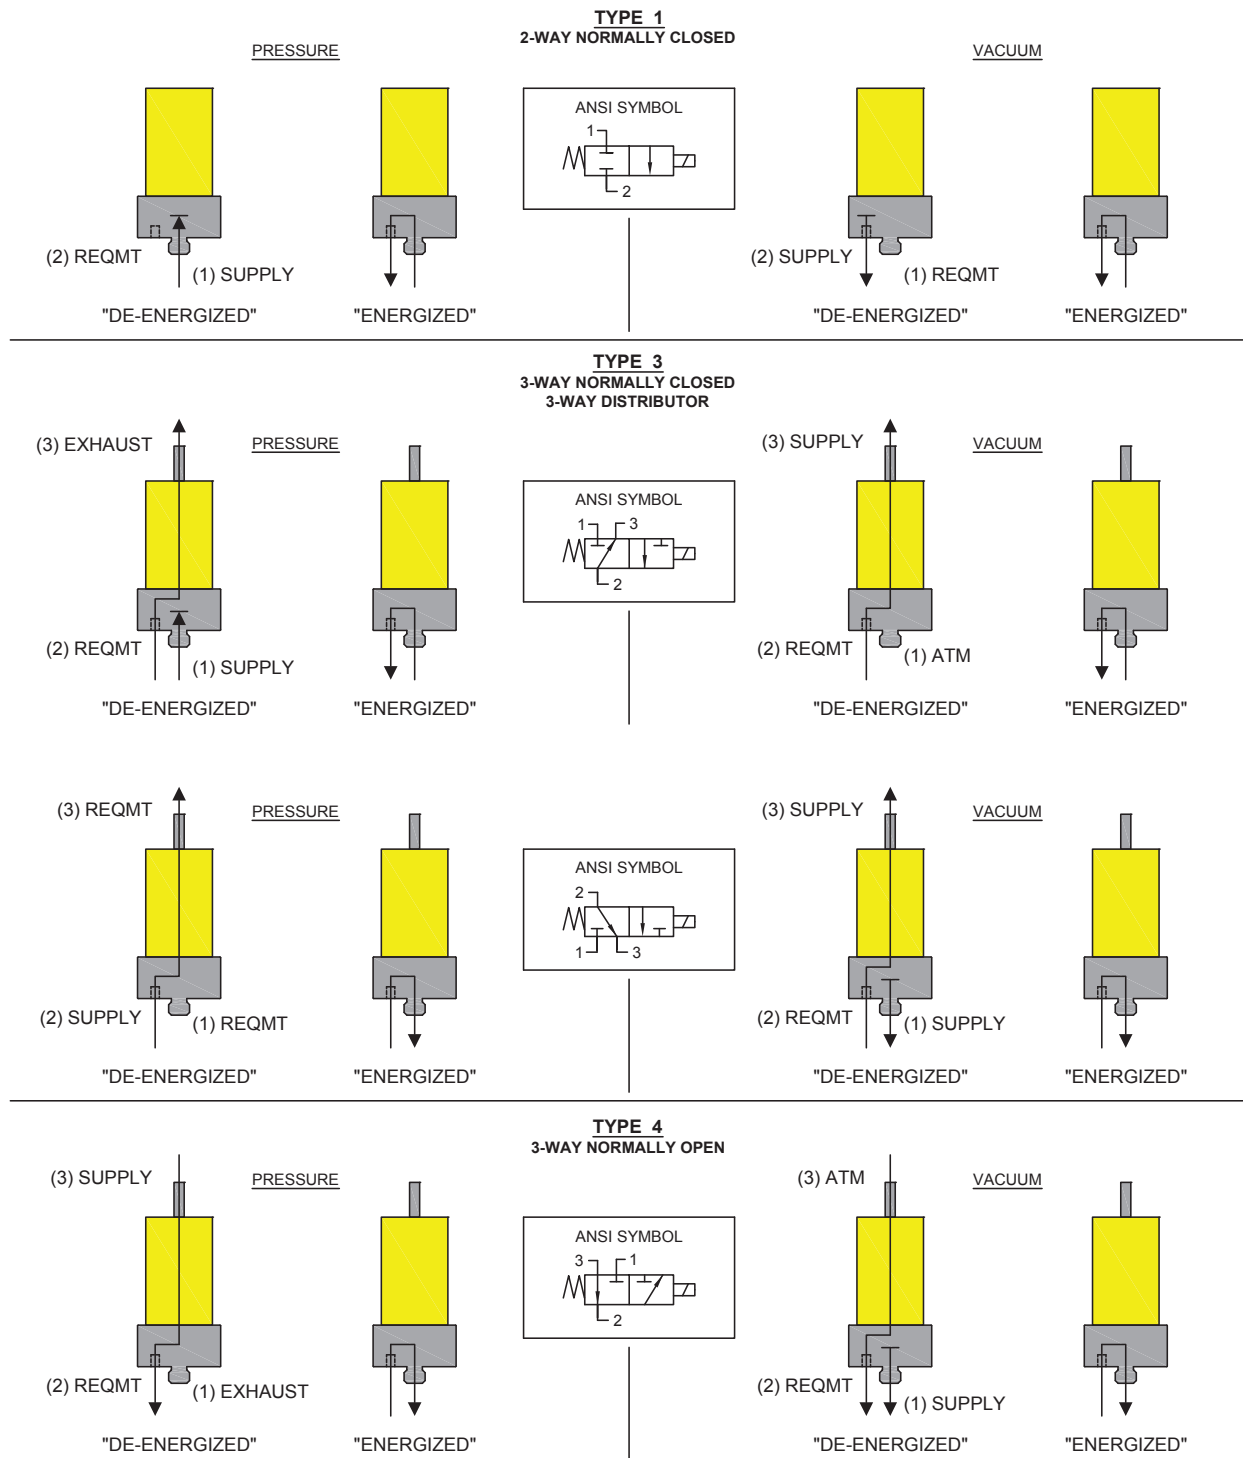

## Series 26 Miniature Pneumatic Solenoid Valve

### Ordering Information

Sample Part ID	26	10	3	NV	12	P	4	7
Description	Series	Model Number: Pressure / Orifice / Power	Type	Material	Voltage	Electrical Coil Selection	Pneumatic Connection Body	Pneumatic Connection Stem
Options	26	10: 0-100 psig / 0.030" orifice / 2 Watts 12: 0-50 psig / 0.050" orifice / 2 Watts 13: 0-50 psig / 0.030" orifice / 1 Watt 15: 0-25 psig / 0.050" orifice / 1 Watt 16: 0-25 psig / 0.030" orifice / 0.5 Watt 18: 0-10 psig / 0.050" orifice / 0.5 Watt 19: 0-70 psig / 0.050" orifice / 2 Watts	1: 2-Way NC 3: 3-Way NC or Distributor 4: 3-Way NO	NV: Nickel-plated Brass/FKM	5: 5 VDC 12: 12 VDC 24: 24 VDC	F: Wire Leads, 18", No Termination P: PC Mount, 4 PC Pins S: PC Mount, 2 Solder Tabs Q: Quick Connect Spade	4: 10-32 Male	0: Manifold Mount (2-Way NC Only) 4: 10-32 Male 5: 10-32 Female 6: 1/16" (1.5 mm) Barbs* 7: 5/64" (2 mm) Barbs 8: 1/8" (3 mm) Barbs  *1/16" Barbs not available for 0.050" orifice valves

NOTE: In order to provide the best possible solution for your application, please provide the following requirements when contacting Applications Engineering:

- Media, Inlet & Outlet Pressures
- Minimum Required Flow Rate
- System Supply Voltage
- Media
- Ambient Temperature Range



Please click on the Order On-line button (or go to [www.parker.com/precisionfluidics/s11](http://www.parker.com/precisionfluidics/s11)) to configure your Series 26 Miniature Pneumatic Solenoid Valve. For more detailed information, visit us on the Web, or call and refer to Performance Spec. #790-002075-001 and Drawing #890-003018-001.


For more information call +1 603 595 1500 or email [ppfinfo@parker.com](mailto:ppfinfo@parker.com)  
Visit [www.parker.com/precisionfluidics](http://www.parker.com/precisionfluidics)



# V<sup>2</sup> Valve

## Miniature Pneumatic Solenoid Valve

### 15 mm Pneumatic Solenoid Valve




The V<sup>2</sup> miniature pneumatic solenoid valve is a proven product with a reputation for reliable and consistent performance. Designed for medical device and system manufacturers, the V<sup>2</sup> miniature pneumatic solenoid valve is made from lightweight PBT plastic and provides flexible mounting and termination options. The V<sup>2</sup> miniature pneumatic solenoid valve also offers pneumatic and electrical design flexibility. It is available in manifold mount or 1/8" (3 mm) barbed tube configurations and is also available with either wire lead, quick connect spade or 4 pin printed circuit board electrical termination.

#### Applications

- Oxygen Conservers
- Flow control/shut-off valve
- Portable Medical Devices

#### Features

- Lightweight PBT plastic body to reduce system weight
- Manifold mount or molded barbed fittings for added system design flexibility
- Printed circuit board mount, quick connect spade or wire lead coil termination to ease integration
- Proven performance tested to 25 million life cycles
- RoHS compliant 

## Product Specifications

#### Mechanical

##### Valve Type:

2/3 Port, Direct-acting poppet style

- Normally Closed (NC)
- Normally Open (NO)
- Distributor (Dist)

##### Media:

Air, Oxygen, Helium, Nitrogen, Carbon Dioxide/Monoxide, & other non-reactive gases.

##### Operating Environment:

32 to 158°F (0 to 70°C)

##### Storage Temperature:

-40 to 158°F (-40 to 70°C)

##### Dimensions:

- Length: 1.73 in (43.9 mm)
- Width: 0.63 in (15.9 mm)
- Height: 0.67 in (17.0 mm)

##### Weight:

1.2 oz (34.3 g)

##### Internal Volume:

0.0009 in<sup>3</sup> (0.016 cm<sup>3</sup>)

##### Filtration:

40 micron (recommended)

#### Electrical

##### Power Options:

0.5, 1.0, or 2.0 Watts

##### Voltage Options:

5, 12 or 24 VDC

Further power reduction may be achieved through the use of spike and hold or PWM electrical control.

#### Wetted Materials

##### Body:

PBT

##### Stem Base:

36000 HO2 Brass

##### All Others:

FKM

430 FR Series Stainless Steel

302 Series Stainless Steel

#### Performance Characteristics

##### Leak Rate (Air):

≤0.2 sccm

##### Response:

<30 ms cycling

##### Pressure:

0 to 100 psig (6.89 bar)

##### Vacuum:

0-27 in Hg (686 mm Hg)

##### Orifice Sizes:


0.030" (0.76 mm)

0.050" (1.27 mm)

##### Reliability:

Life cycle rating of 25 million (worst case tested, no performance degradation)

## V<sup>2</sup> Valve Miniature Pneumatic Solenoid Valve Typical Flow Curve

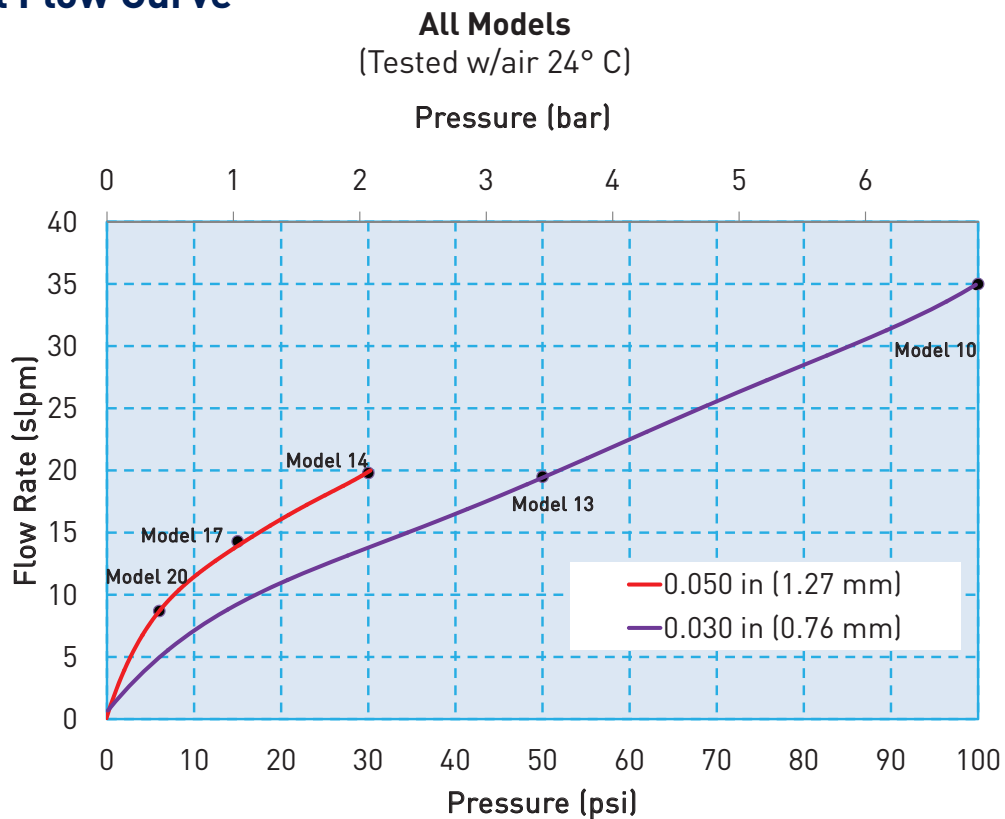

All models reflect typical flow output capability based on rated pressure

## Pressure and Flow Capabilities

Model No.	Orifice Size	Nominal Cv	Maximum Supply Pressure	Power Consumption
10	0.030 in (0.76 mm)	0.017	100 psig (6.89 bar)	2 Watts
13	0.030 in (0.76 mm)	0.017	50 psig (3.45 bar)	1 Watt
14	0.050 in (1.27 mm)	0.034	30 psig (2.07 bar)	2 Watts
16	0.030 in (0.76 mm)	0.017	25 psig (1.72 bar)	0.5 Watt
17	0.050 in (1.27 mm)	0.032	15 psig (1.03 bar)	1 Watt
20	0.050 in (1.27 mm)	0.030	6 psig (0.41 bar)	0.5 Watt


# V<sup>2</sup> Valve Miniature Pneumatic Solenoid Valve

## Mechanical Integration

### Dimensions


#### V<sup>2</sup> Basic Dimensions, Barbed Configuration

##### Barbed

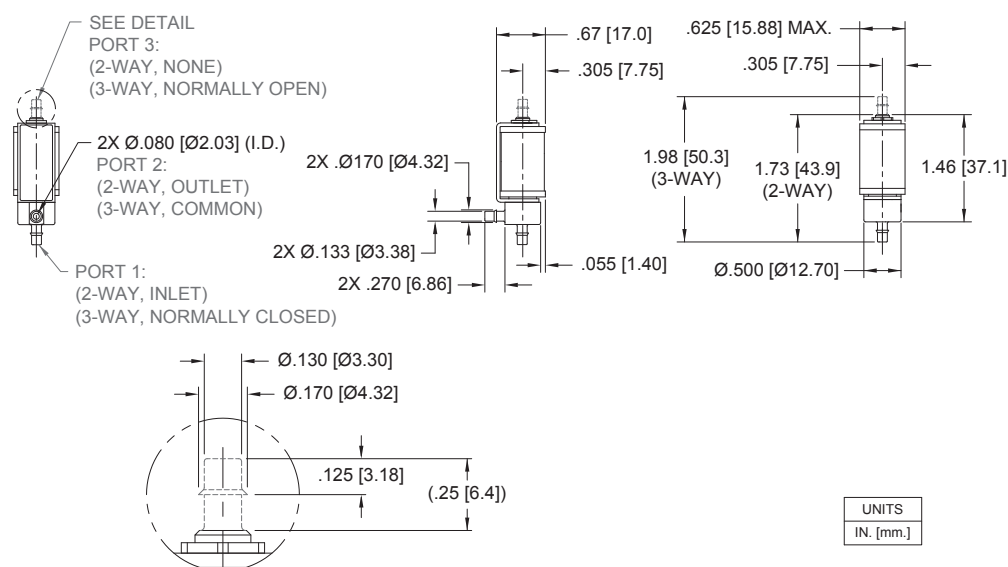


#### V<sup>2</sup> Basic Dimensions, Manifold Mount Configuration

##### Manifold Mount

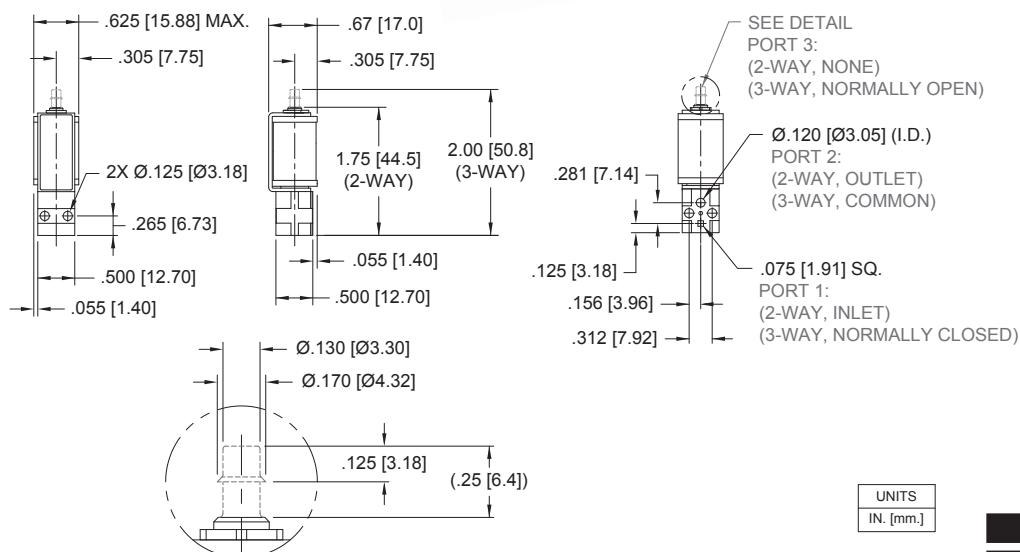


# V<sup>2</sup> Valve Miniature Pneumatic Solenoid Valve Electrical Interface


## Coil Type: Solder Tab (See Order Info "S")

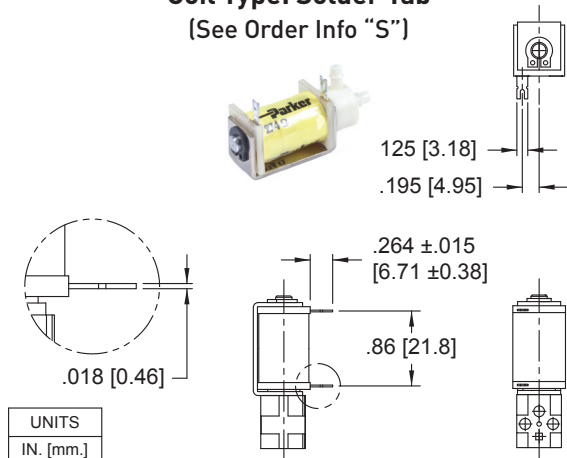


## Coil Type: Quick Connect Spade (See Order Info "Q")

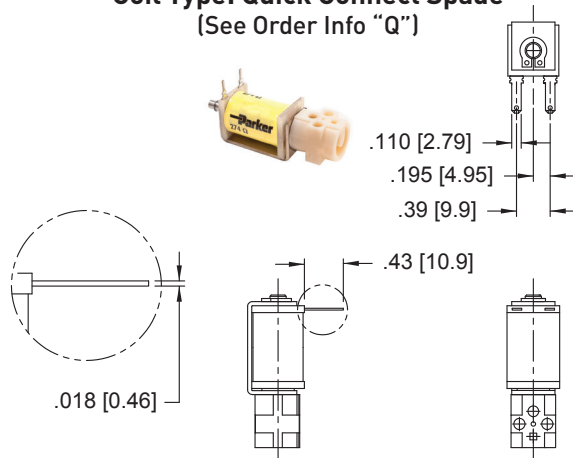


## Coil Type: Wire Leads (See Order Info "F")

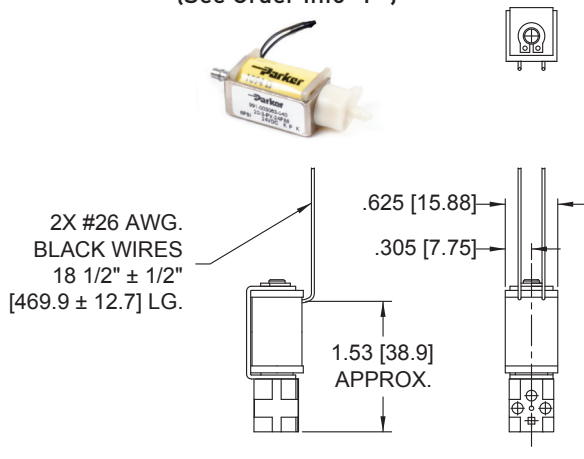

## Coil Type: 4 PC Pins\* (See Order Info "P")

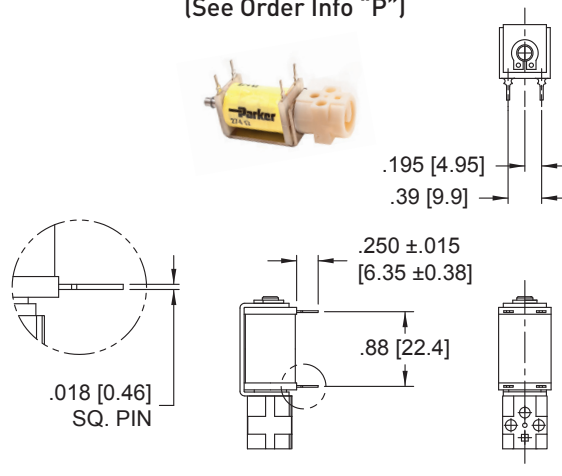

### \*PCB Pin Layout (Coil Type 4 PC Pin)

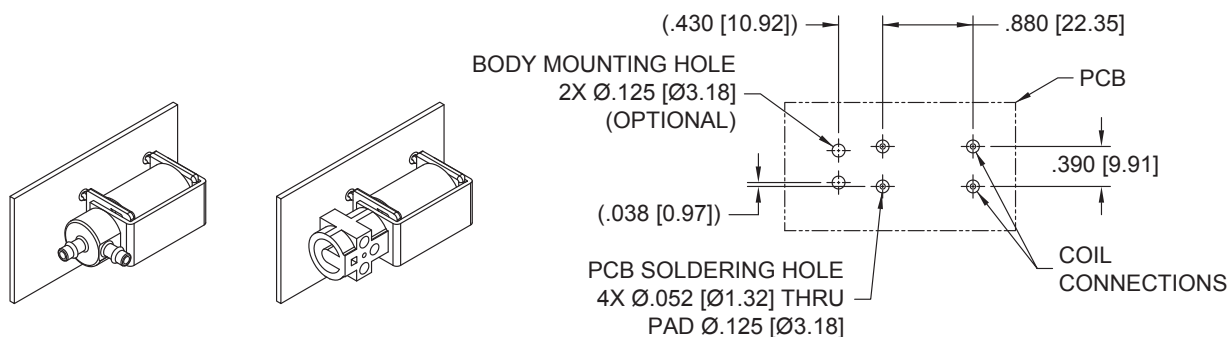


# V<sup>2</sup> Valve Miniature Pneumatic Solenoid Valve ANSI Symbols

LEGEND:	
SUPPLY:	Pneumatic Source or Supply Pressure
EXHAUST:	Exhaust to Atmospheric Pressure
REQMT:	Customer Requirement or Application
ATM:	Atmospheric Pressure


## Pneumatic Schematics by Valve Types

### PORT LOCATIONS

MANIFOLD BODY OPTION





BARB BODY OPTION




### TYPE 1 2-WAY NORMALLY CLOSED

PRESSURE





VACUUM




### TYPE 3 3-WAY NORMALLY CLOSED

PRESSURE





VACUUM




### TYPE 3 3-WAY DISTRIBUTOR

PRESSURE





VACUUM




### TYPE 4 3-WAY NORMALLY OPEN

PRESSURE



VACUUM




## V<sup>2</sup> Valve Miniature Pneumatic Solenoid Valve

### Accessories

#### O-Ring (Manifold Seal) Dimensions


190-007024-002  
(2 required for each valve)

I.D. =  $\varnothing 0.114 \pm 0.005$  [ $\varnothing 2.90 \pm 0.13$ ]  
W =  $0.070 \pm 0.003$  [ $1.78 \pm 0.08$ ]  
O.D. =  $\varnothing 0.254$  [ $\varnothing 6.45$ ] REFERENCE



#### Body Standoff

890-000027-001  
(2 required for each valve)

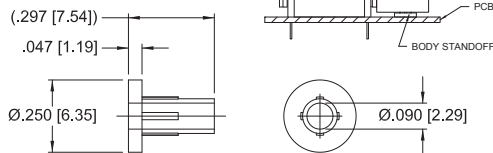

#### Screw 4-40 x 5/8" Pan Head

191-000115-010  
(2 required for each valve)



### Ordering Information

Sample Part ID	V2	14	3	PV	12	P	8	8
Description	Series	Model Number: Pressure / Orifice / Power	Type	Material XX: Body / Poppet Seal	Voltage	Coil Type	Body Styles	Topseat Barbs
Options	V2	10: 0-100 psi / 0.030" orifice / 2 Watts 13: 0-50 psi / 0.030" orifice / 1 Watt 14: 0-30 psi / 0.050" orifice / 2 Watts 16: 0-25 psi / 0.030" orifice / 0.5 Watt 17: 0-15 psi / 0.050" orifice / 1 Watt 20: 0-6 psi / 0.050" orifice / 0.5 Watt	1: 2-Way NC 3: 3-Way NC or Distributor 4: 3-Way NO	PV: Plastic / FKM	5: 5 VDC 12: 12 VDC 24: 24 VDC	F: Wire Leads, 18", No Termination P: PC Mount, 4 PC Pins S: PC Mount, 2 Solder Tabs Q: Quick Connect Spade	0: Manifold Mount 8: 1/8" (3 mm) Barbs	0: None (2-Way NC Only) 8: 1/8" (3 mm) Barbs

#### Accessories

191-000115-010: Screw 4-40 x 5/8" Pan Head, Phillips	Used to create a flush mount between coil and valve body
890-000027-001: Body Standoff	Used as seal between manifold and valve body
190-007024-002: O-ring, FKM	



NOTE: In order to provide the best possible solution for your application, please provide the following requirements when contacting Applications Engineering:

- Media, Inlet & Outlet Pressures
- Minimum Required Flow Rate
- System Supply Voltage
- Media
- Ambient Temperature Range

Please click on the Order On-line button (or go to [www.parker.com/precisionfluidics/v2](http://www.parker.com/precisionfluidics/v2)) to configure your V<sup>2</sup> Miniature Pneumatic Solenoid Valve. For more detailed information, visit us on the Web, or call and refer to Performance Spec. #790-002156-001 and Drawing #890-003080-001.


For more information call +1 603 595 1500 or email [ppinfo@parker.com](mailto:ppinfo@parker.com)  
Visit [www.parker.com/precisionfluidics](http://www.parker.com/precisionfluidics)





# SRS Miniature Pneumatic Solenoid Valve

## 10 mm Manifold Mount Solenoid Valve

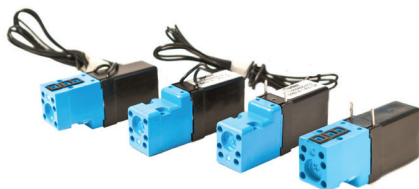


The SRS miniature solenoid valve is a compact and lightweight 10 mm manifold mount solenoid valve designed for portable instruments and medical devices requiring minimal power consumption and quiet operation. Utilizing an integrated manifold seal design in combination with a variety of electrical termination options, the SRS miniature solenoid valve simplifies pneumatic and electronic integration. With flow rates of up to 18 slpm and inlet pressures of up to 85 psig, the SRS miniature solenoid valve is an ideal solution for demanding portable instruments and medical devices.

### Applications

- Medical & Analytical Gas Control
- Blood Pressure Monitoring
- Sensor Zeroing
- Patient Monitors
- Portable Medical Devices

### Features

- Lightweight and compact to reduce system size and weight
- Integrated manifold seal and PC mount capability to simplify integration
- Hermetically-sealed coil protects the valve from accidental exposure to liquids
- Constructed of PBT and non-corrosive metal for use with non-reactive gases
- RoHS compliant 

## Product Specifications

### Mechanical

<b>Valve Type:</b>	3 Port, Direct-acting poppet style - Normally Closed - Normally Open - Distributor
<b>Media:</b>	Non-Reactive gases
<b>Operating Environment:</b>	32 to 131°F (0 to 55°C)
<b>Storage Temperature:</b>	-40 to 158°F (-40 to 70°C)
<b>Dimensions:</b>	- Length: 1.5 in (38.1 mm) - Width: 0.39 in (10.0 mm) - Height: 0.61 in (15.5 mm)
<b>Porting:</b>	Manifold mount; Gasket supplied
<b>Weight:</b>	0.23 oz (6.5 g)
<b>Internal Volume:</b>	0.0016 in <sup>3</sup> (0.027 cm <sup>3</sup> )
<b>Filtration:</b>	40 micron (recommended)

### Electrical

<b>Power Options:</b>	0.5 or 1.0 Watt
<b>Voltage Options: (±10%)</b>	5, 12 or 24 VDC Further power reduction may be achieved through the use of spike and hold or PWM electrical control.

### Wetted Materials

<b>Bobbin/Body:</b>	Glass Reinforced PBT (Polybutylene terephthalate)
<b>Pole &amp; Plunger:</b>	430 FR Stainless Steel
<b>Seal:</b>	FKM
<b>Other:</b>	300 Series Stainless Steel


### Performance Characteristics

<b>Leak Rate:</b>	<0.016 sccm of air
<b>Response:</b>	<30 ms cycling
<b>Pressure:</b>	0 to 85 psid (5.86 bar)
<b>Vacuum:</b>	0-27 in Hg (686 mm Hg)
<b>Burst Pressure:</b>	200 psig (13.7 bar)
<b>Orifice Sizes / Equivalent Cv:</b>	0.045" (1.14 mm) / 0.027 0.030" (0.76 mm) / 0.017 0.020" (0.51 mm) / 0.0075
[See Life-cycle information in Performance Parameters section.]	


# SRS Miniature Pneumatic Solenoid Valve

## Typical Flow Curve


**All Models**  
 (Tested w/air 24° C)  
 Pressure (bar)

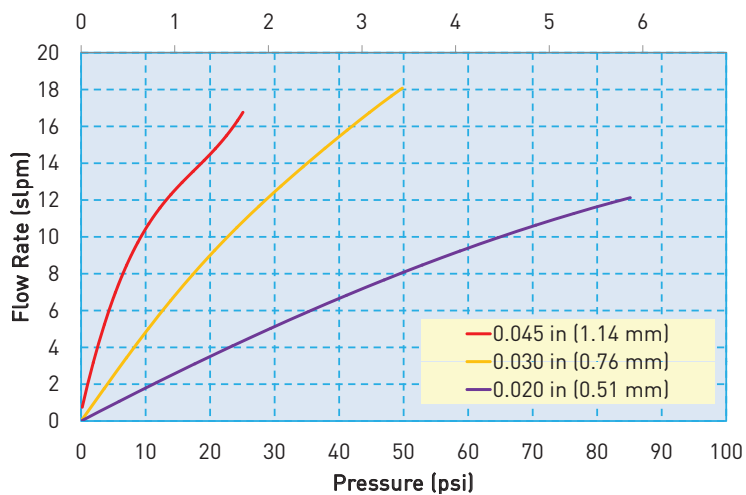


**Models 10 and 11 – 0.020" (0.51 mm) Orifice**  
 Pressure (bar)

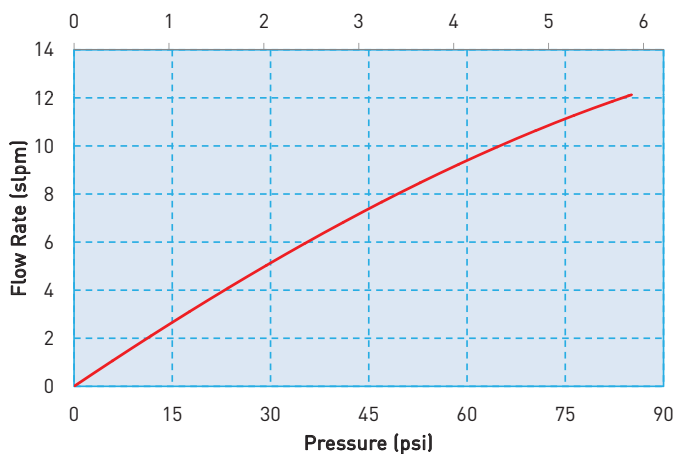

**Models 13 and 14 – 0.030" (0.76 mm) Orifice**  
 Pressure (bar)

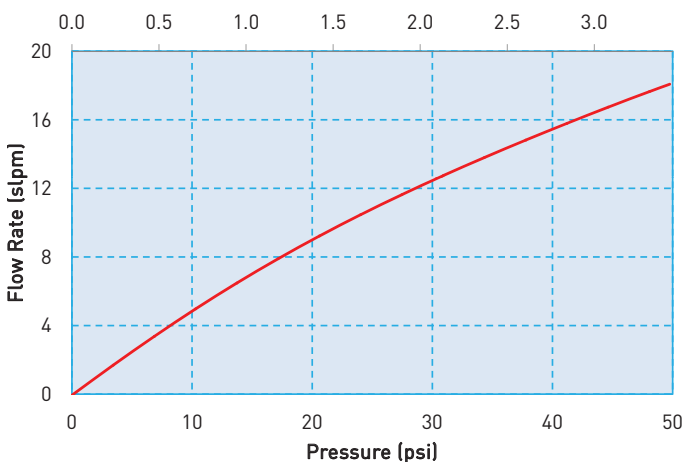

**Models 16 and 17 – 0.045" (1.14 mm) Orifice**  
 Pressure (bar)

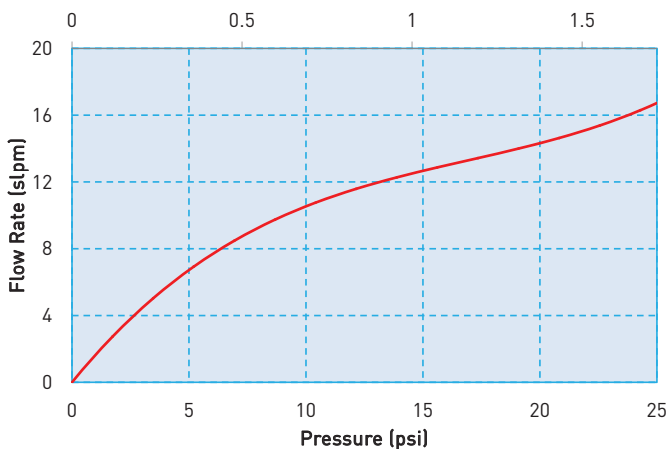

## SRS Miniature Pneumatic Solenoid Valve

### Performance Parameters

Model No.	Orifice Size	Maximum Supply Pressure	Maximum Supply Vacuum	Power Consumption	Life Requirements (millions of cycles)
10	0.020 in (0.51 mm)	35 psi (2.41 bar)	27 in Hg (686 mm Hg)	0.5 Watt	175
11	0.020 in (0.51 mm)	85 psi (5.86 bar)	27 in Hg (686 mm Hg)	1 Watt	50
13	0.030 in (0.76 mm)	20 psi (1.37 bar)	27 in Hg (686 mm Hg)	0.5 Watt	200
14	0.030 in (0.76 mm)	50 psi (3.44 bar)	27 in Hg (686 mm Hg)	1 Watt	25
16	0.045 in (1.14 mm)	10 psi (0.68 bar)	20 in Hg (508 mm Hg)	0.5 Watt	100
17	0.045 in (1.14 mm)	20 psi (1.37 bar)	27 in Hg (686 mm Hg)	1 Watt	25


## Pneumatic Interface



## Mechanical Integration



### Dimensions

#### SRS Basic Valve Dimensions


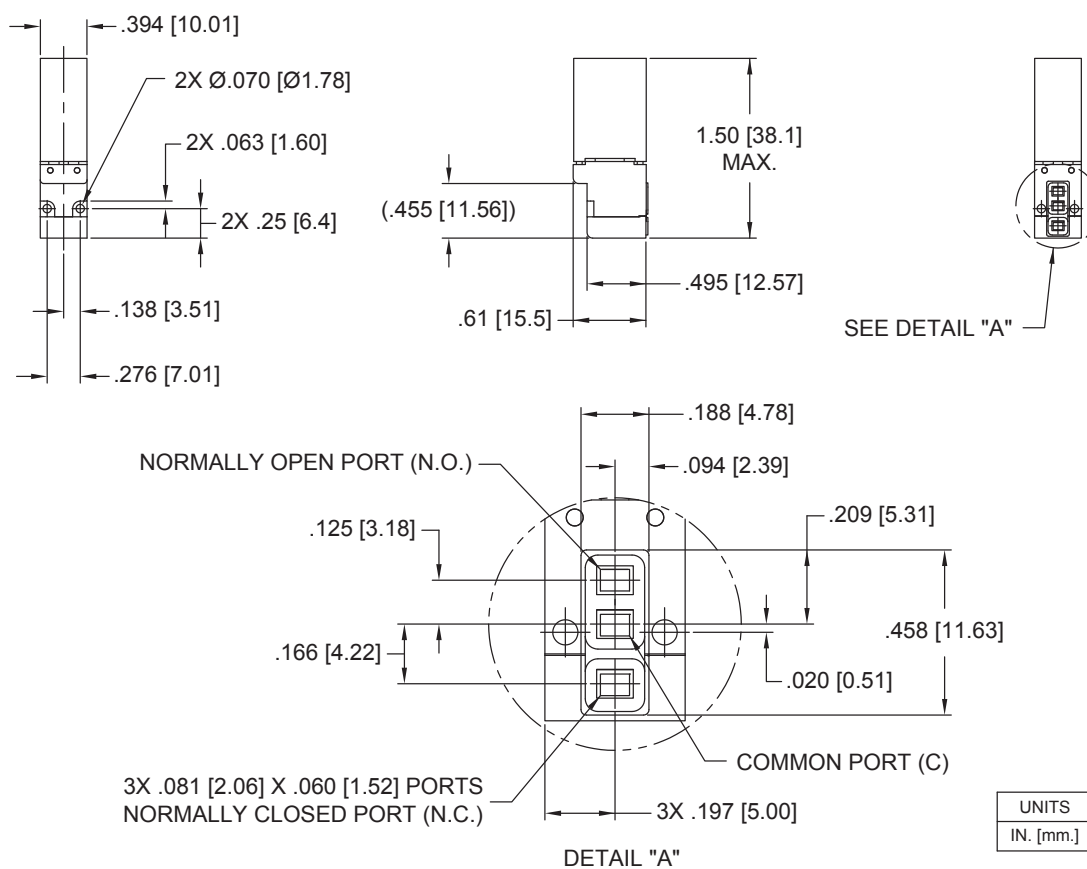


# SRS Miniature Pneumatic Solenoid Valve


## Electrical Interface

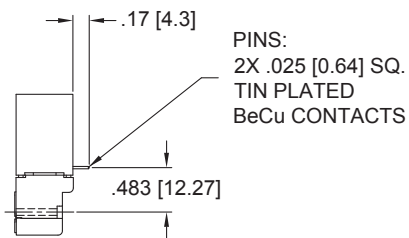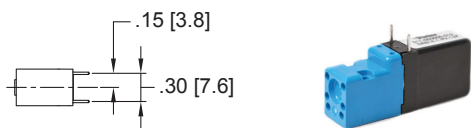


"F" - TYPE  
ELECTRICAL CONNECTION  
(.025 [0.64] SQUARE PINS, FRONT)

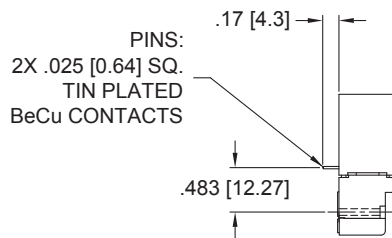

"M" - TYPE  
ELECTRICAL CONNECTION  
(.025 [0.64] SQUARE PINS,  
MANIFOLD INTERFACE)

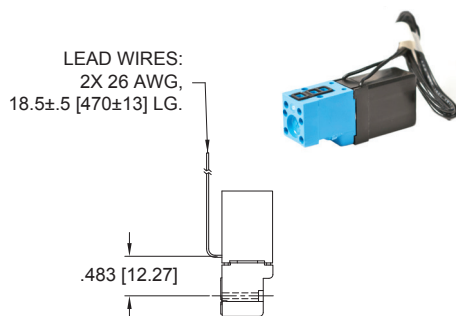


LEAD WIRES:  
2X 26 AWG,  
18.5±.5 [470±13] LG.



"R" - TYPE  
ELECTRICAL CONNECTION  
(INSULATED WIRE LEADS, 18" [457.2]  
MANIFOLD INTERFACE)



LEAD WIRES:  
2X 26 AWG,  
18.5±.5 [470±13] LG.



"L" - TYPE  
ELECTRICAL CONNECTION  
(INSULATED WIRE LEADS,  
18" [457.2] FRONT)


UNITS
IN. [mm.]

# SRS Miniature Pneumatic Solenoid Valve

## ANSI Symbols


LEGEND:	
SUPPLY:	Pneumatic Source or Supply Pressure
EXHAUST:	Exhaust to Atmospheric Pressure
REQMT:	Customer Requirement or Application
ATM:	Atmospheric Pressure

### Pneumatic Schematics by Valve Types

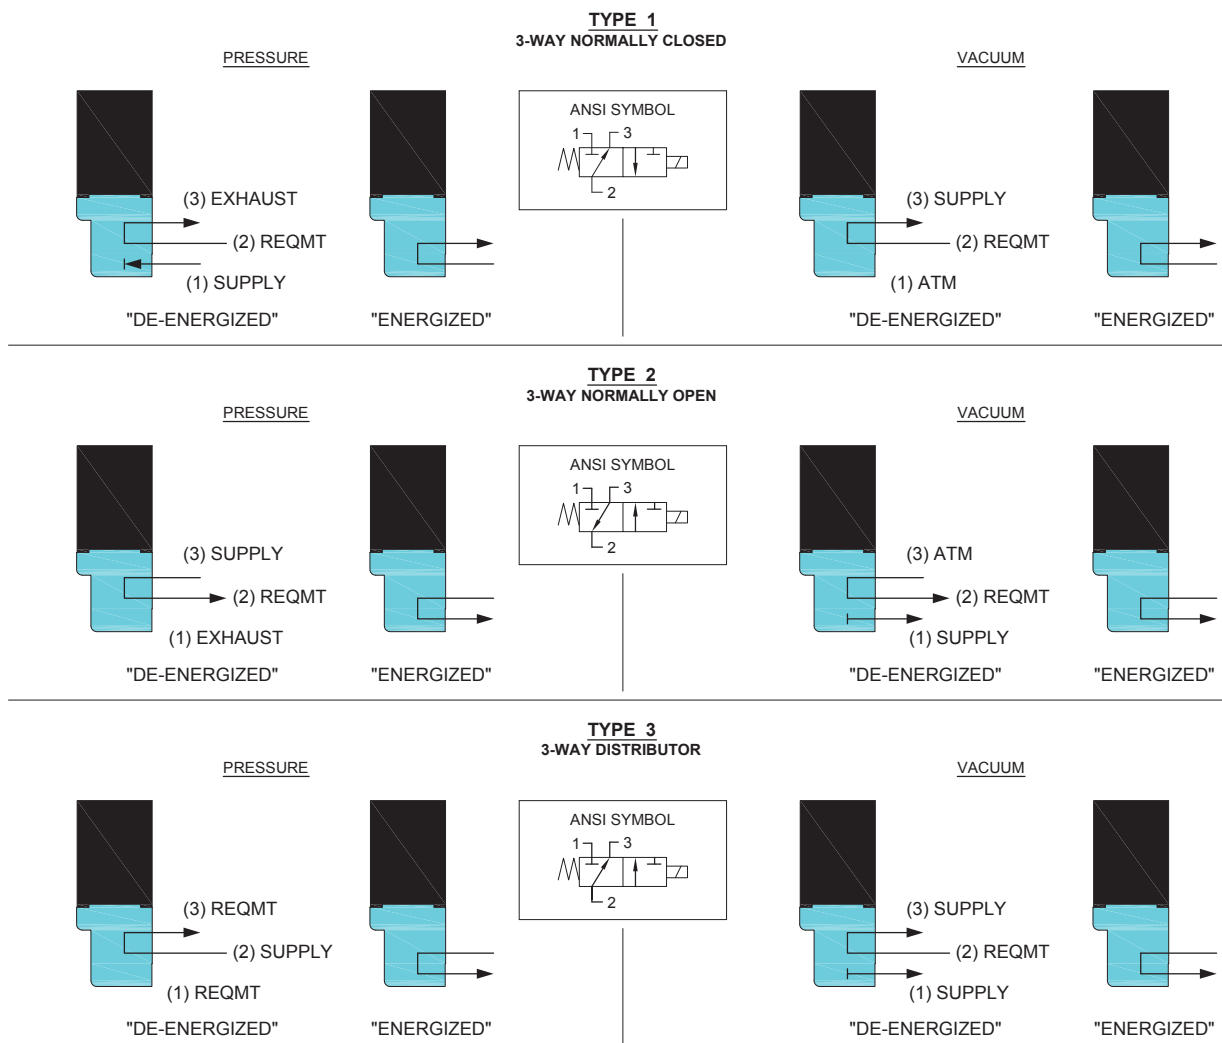

## Installation and Use

### SRS Manifold Mount Diagram

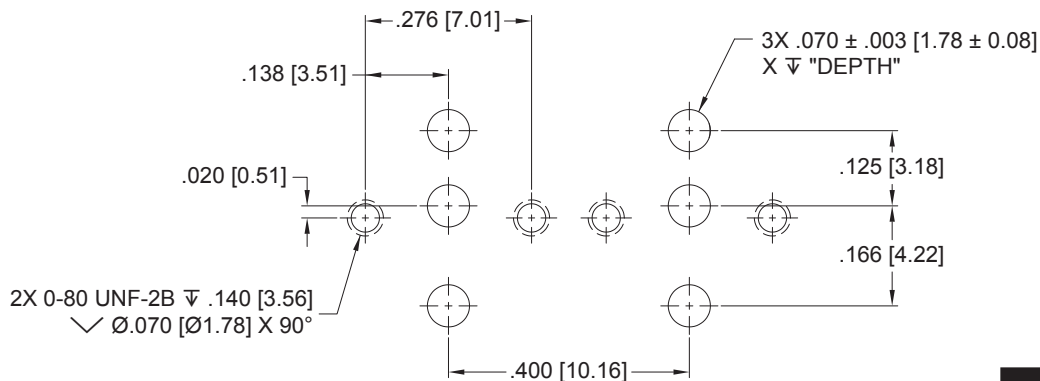

# SRS Miniature Pneumatic Solenoid Valve Accessories


**Seal, Valve Manifold, SRS**  
195-000139-001



**Screw 0-80 x 9/16" Pan Head, Phillips**  
191-000100-009  
(2 required for each valve)



**Test Manifold, Single Station, SRS**  
990-001362-001

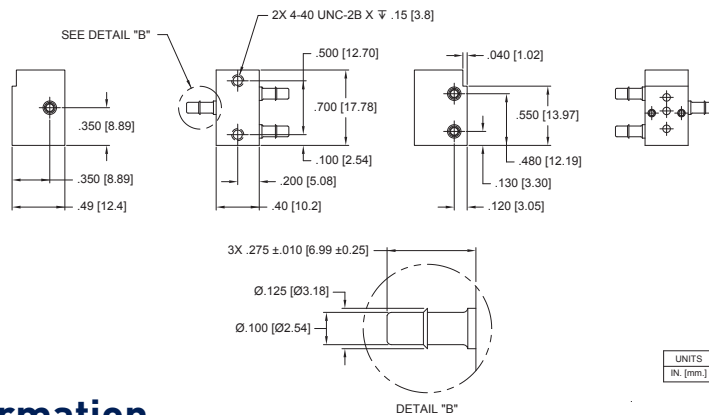

## Ordering Information

Sample Part ID	SRS	10	2	P	V	12	M
Description	Series	Model Number: Pressure / Orifice	Type	Material	Seal Material	Voltage	Electrical Connection
Options	SRS	10: 0-35 psi / 0.020" 11: 0-85 psi / 0.020" 13: 0-20 psi / 0.030" 14: 0-50 psi / 0.030" 16: 0-10 psi / 0.045" 17: 0-20 psi / 0.045"	1: 3-Way NC 2: 3-Way NO 3: 3-Way NC or Distributor	P: Engineering Plastic	V: FKM	5: 5 VDC 12: 12 VDC 24: 24 VDC	F: 0.025" Square Pins, Front M: 0.025" Square Pins, Manifold Interface L: Insulated Wire Leads, 18", Front R: Insulated Wire Leads, 18", Manifold Interface

Accessories							
195-000139-001: Seal, Valve Manifold, SRS *							* Used as seal between manifold and valve body
191-000100-009: Screw 0-80 x 9/16", Pan Head, Phillips (2 required for each valve)							
990-001362-001: Test Manifold, Single Station, SRS							

NOTE: In order to provide the best possible solution for your application, please provide the following requirements when contacting Applications Engineering:

- Media, Inlet & Outlet Pressures
- Minimum Required Flow Rate
- System Supply Voltage
- Media
- Ambient Temperature Range



Please click on the Order On-line button (or go to [www.parker.com/precisionfluidics/srs](http://www.parker.com/precisionfluidics/srs)) to configure your SRS Miniature Pneumatic Solenoid Valve. For more detailed information, visit us on the Web, or call and refer to Performance Spec. #790-002090-001 and Drawing #890-003061-001.

For more information call +1 603 595 1500 or email [ppfinfo@parker.com](mailto:ppfinfo@parker.com)  
Visit [www.parker.com/precisionfluidics](http://www.parker.com/precisionfluidics)



# PND Series Miniature Pneumatic Solenoid Valve

## 10 mm Normally Open Exhaust Valve




### Applications

- Non-Invasive Blood Pressure-Devices
- Normally Open Fail-Safe Exhaust

The PND Series miniature pneumatic solenoid valve is an economical 2-way normally open exhaust valve designed for rapid pressure relief. The PND Series miniature pneumatic solenoid valve is the perfect solution for safety oriented applications that require pressure relief to atmosphere upon power loss.

### Features

- Compact, economical design to reduce size and cost of integration
- Normally Open configuration to ensure rapid deflation upon power loss
- Low power design reduces heat generation and power consumption
- Proven performance tested to 250,000 life cycles
- RoHS compliant 

## Product Specifications

### Mechanical

<b>Valve Type:</b>
2 Port, Direct-acting poppet style - Normally Open (NO)
<b>Media:</b>
Air, Nitrogen, Argon, Carbon Dioxide, & other non-reacting gasses
<b>Operating Environment:</b>
32 to 131°F (0 to 55°C)
<b>Storage Temperature:</b>
-13 to 158°F (-25 to 70°C)
<b>Dimensions:</b>
PND-05D: - Length: 1.01 in (25.7 mm) - Width: 0.39 (10.0 mm) - Height: 0.47 in (12.0 mm)
<b>Porting:</b>
Single Barb for 0.078" (2.0 mm) I.D. Tubing
<b>Weight (Typical):</b>
PND-05A: 0.60 oz (17.0 g) PND-05D: 0.40 oz (11.4 g)
<b>Internal Volume:</b>
PND-05A: 0.0035 in <sup>3</sup> (0.056 cm <sup>3</sup> ) PND-05D: 0.0025 in <sup>3</sup> (0.041 cm <sup>3</sup> )
<b>Filtration:</b>
40 micron (recommended)

### Electrical

<b>Power:</b>
PND-05A: 0.36 Watt PND-05D: 0.50 Watt
<b>Voltage:</b>
3, 6 or 12 VDC Further power reduction can be achieved with the use of PWM control.

### Wetted Materials

<b>Bobbin:</b>
PBT (Polybutylene terephthalate)
<b>Plunger/Barb:</b>
SUM24L Steel
<b>Seal:</b>
Silicone
<b>Frame:</b>
SPCC Steel (Treatment: MFZn-c)
<b>Other:</b>
304 Stainless Steel


### Performance Characteristics

<b>Leak Rate:</b>
< 0.016 sccm of air
<b>Response:</b>
< 100 ms cycling
<b>Pressure:</b>
0 to 6 psig (0.4 bar)
<b>Orifice Sizes/Equivalent Cv:</b>
PND-05A: 0.050" (1.27 mm) / 0.035
PND-05D: 0.030" (0.75 mm) / 0.017
<b>Reliability:</b>
Life cycle rating of 250,000 cycles (worst case tested, no performance degradation)


## PND Series Miniature Pneumatic Solenoid Valves

### Typical Flow Curve


**All Models**  
[Tested w/air 24° C]

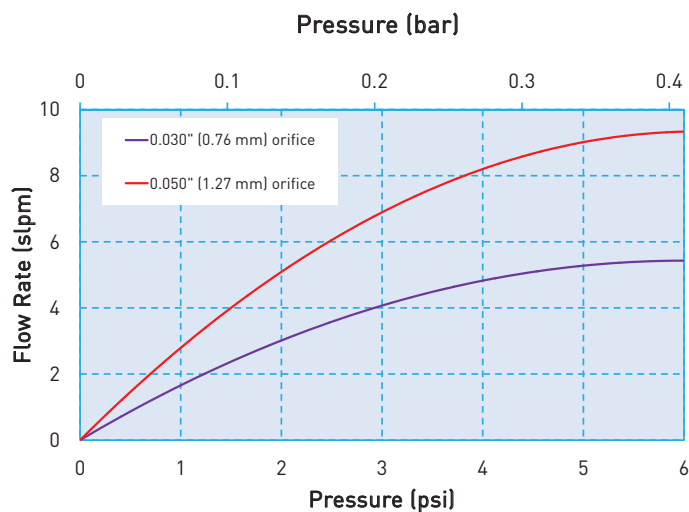

#### Model PND-05A – 0.050" (1.27 mm) Orifice

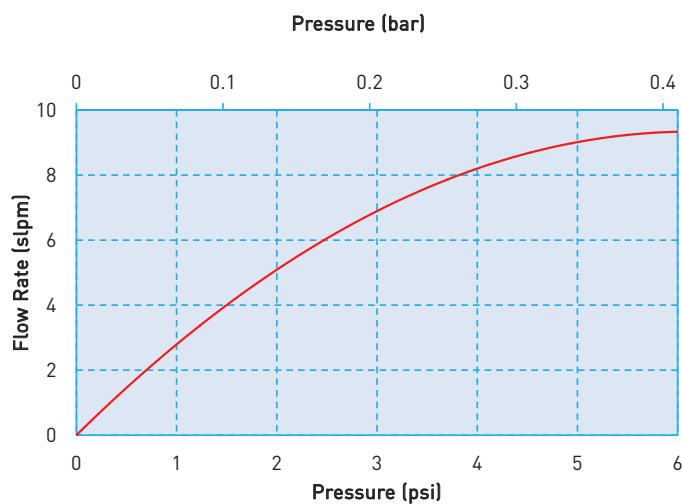

#### Model PND-05D – 0.030" (0.76 mm) Orifice

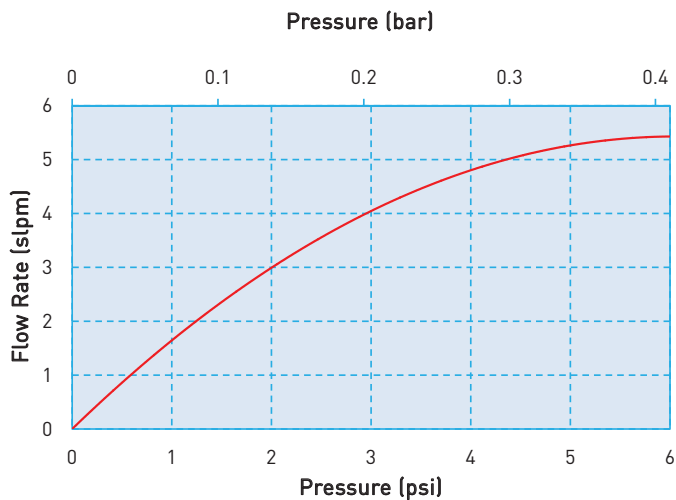



## PND Series Miniature Pneumatic Solenoid Valves

### Pressure and Flow Capabilities/Power

Model No.	Orifice Size	Nominal Cv	Maximum Supply Pressure	Power Consumption
PND-05A	0.050 in (1.27 mm)	0.035	6 psig (0.4 bar)	0.36 Watt
PND-05D	0.030 in (0.76 mm)	0.017	6 psig (0.4 bar)	0.50 Watt

### Pneumatic Interface

PND Series 05A




PND Series 05D




### Mechanical Integration

#### Dimensions

Basic Dimensions, PND-05D

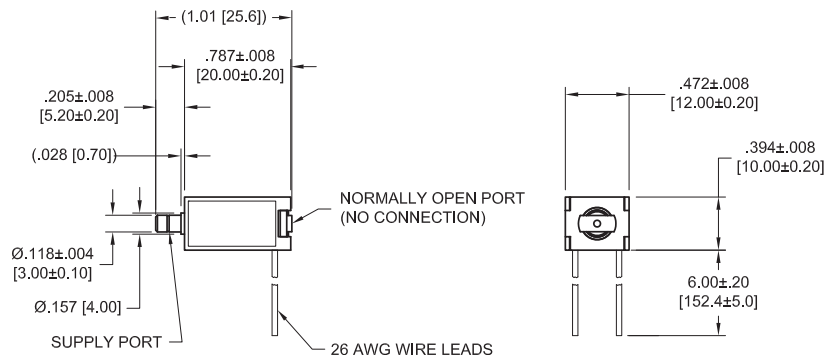


Basic Dimensions, PND-05A

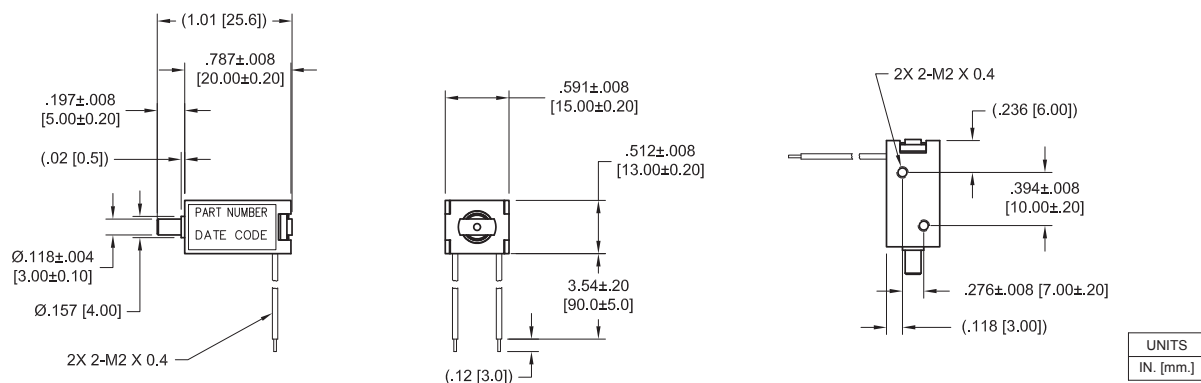

## PND Series Miniature Pneumatic Solenoid Valves Installation and Use

### Mounting Guidelines (PND-05A Only)

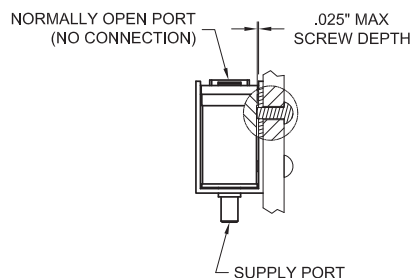

### Ordering Information

Sample Part ID	PND	-	05D	-	12
Description	Series	-	Model: Orifice / Power	-	Voltage
Options	PND	-	05A: 0.050" / 0.36 Watt 05D: 0.030" / 0.50 Watt	-	03: 3 VDC 06: 6 VDC 12:12 VDC



NOTE: In order to provide the best possible solution for your application, please provide the following requirements when contacting Applications Engineering:

- Media, Inlet & Outlet Pressures
- Minimum Required Flow Rate
- System Supply Voltage
- Media
- Ambient Temperature Range

Please click on the Order On-line button (or go to [www.parker.com/precisionfluidics/pndvalve](http://www.parker.com/precisionfluidics/pndvalve)) to configure your PND Miniature Pneumatic Solenoid Valve. For more detailed information, visit us on the Web, or call and refer to Performance Spec. #790-002198-001 and Drawing #: PND-05A-DWG and PND-05D-DWG.

For more information call +1 603 595 1500 or email [ppfinfo@parker.com](mailto:ppfinfo@parker.com)  
Visit [www.parker.com/precisionfluidics](http://www.parker.com/precisionfluidics)



# Pulse Valves

## Ultra Low Leak Extreme Performance Valve



### Applications

- Gas pulse generation for Laser Spectroscopy

Pulse Valves solenoid valves offer outstanding potential for precision control of Laser Spectroscopy Gas Analysis. Combining high speed, ultra low leak rate, high flow, and high temperature capability in a small size; this rugged valve operates with extreme repeatability and is constructed of non-corroding, passivated stainless steel. Pulse Valves coils are rated for continuous duty and are potted to exclude the environment.

### Features

- Smallest footprint in its class
- High speed response times of less than 2 ms
- 100% tested to leak-tight  $1 \times 10^{-7}$  cc/sec/atm Helium
- 100% duty cycle in environmental temperatures of up to 221°F (105°C)
- Pressures up to 1250 PSI (86.2 bar)
- Available with a variety of orifices, seals, and voltages to match your application
- RoHS compliant



## Product Specifications

### Physical Properties

<b>Valve Type:</b>	Inert Non Isolation
<b>Valve Configuration:</b>	2-Way Normally Closed
<b>Media:</b>	Gases
<b>Operating Environment:</b>	40 to 221°F (4 to 105°C)
<b>Dimensions:</b>	See Dimensions Page
<b>Weight:</b>	2.8 oz (79.4 g)
<b>Porting:</b>	A-LOK®, Flange
<b>Internal Volume:</b>	(Contact factory for details)

### Electrical

<b>Voltage (VDC):</b>	20	28
<b>Power (Watts):</b>	12.1	11.2
<b>Current (mA):</b>	606	400
<b>Resistance (Ohm):</b>	33	70
(Ω±5% @ 70°F, 21°C)		
<b>Connection</b>	12" Lead Wires Standard	

### Wetted Materials

<b>Poppet Materials*:</b>	Vespel®** PTFE
<b>O-Ring:</b>	FFKM (Kalrez®)**
**NOTE: Vespel and Kalrez are trademarks of Dupont.	
* See accessories table under ordering information for additional poppet materials.	

### Performance Characteristics



<b>Operating Pressures / Orifice Diameters:</b>	1x10 <sup>-5</sup> Torr -1250 psi (86.2 bar)/ 0.004" (.10 mm) 0.020" (.51 mm) 0.031" (.79 mm) 1x10 <sup>-5</sup> Torr -750 psi (51.7 bar)/ 0.039" (99 mm)
<b>Proof Pressure:</b>	1.5X rated pressure
<b>Response Time:</b>	<2 ms cycling Down to 160µs with the Parker IOTA ONE Valve Driver. (See Accessories)
<b>Leak Rate:</b>	1 x 10 <sup>-7</sup> cc/sec/atm Helium
<b>Recommended Filtration:</b>	40 µm max
<b>Orifice Shape:</b>	Cone, No Cone (Cone improves exit stream uniformity)

# Pulse Valves Ultra Low Leak Extreme Performance Valve

## Mechanical Integration

### Dimensions

#### 1/4" [6.35 mm] A-LOK® CROSS-SECTION

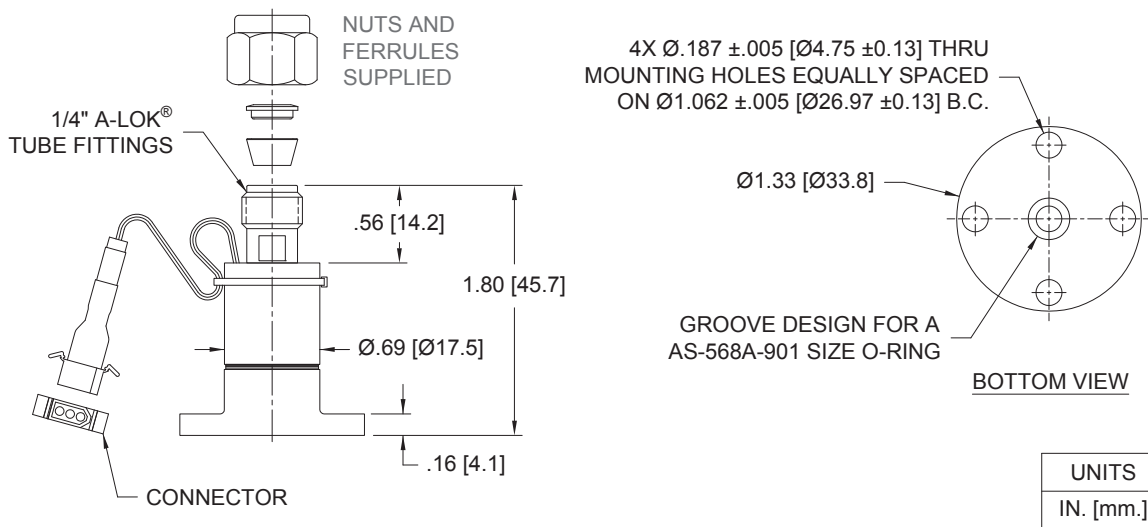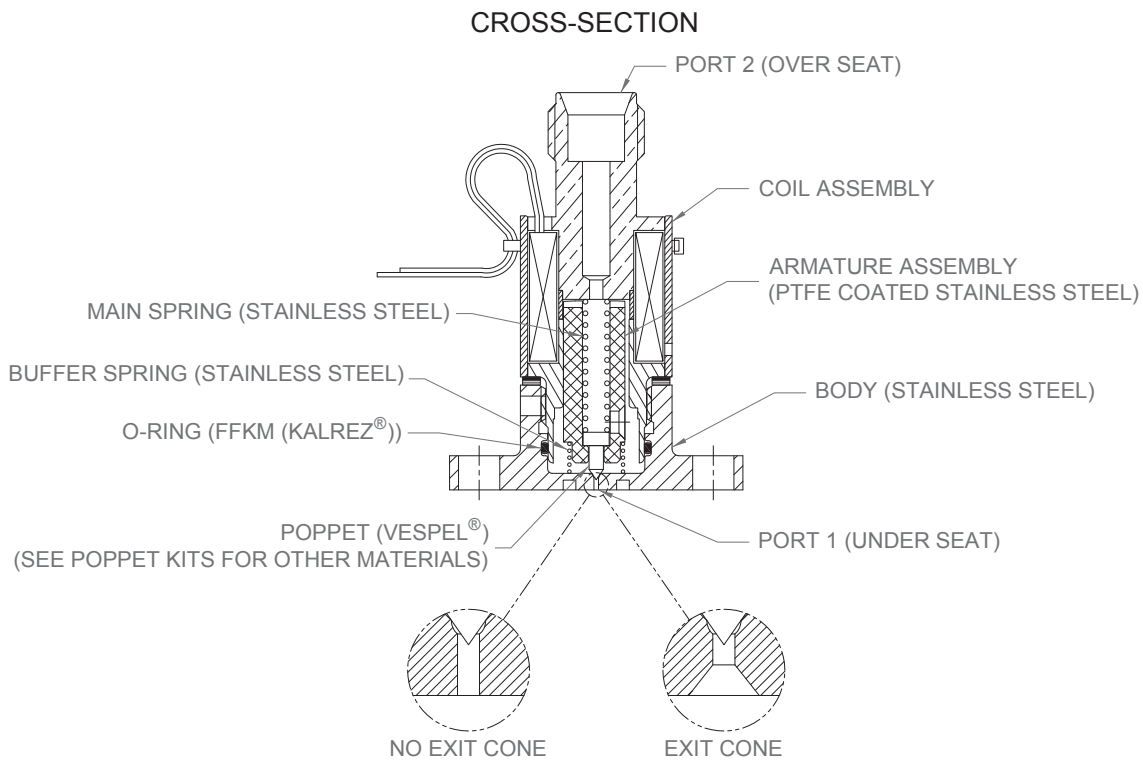


## Pulse Valves Ultra Low Leak Extreme Performance Valve

### Hit and Hold Specifications (12-Watt coils):

Hit and Hold is a method for driving valves that can be used to reduce power consumption and heat generation while maintaining valve performance specifications. The valve is “hit” with the full rated voltage for some time period to open it (T1 in the graph) and then “held” open with substantially reduced voltage until the desired pulse length is reached (T2 in the graph). The following table shows the possible holding voltages and power consumption for most of our standard 12-watt valve solenoids.

<b>Rated Voltage (volts)</b>	<b>3-way</b>		<b>2-way</b>	
	<b>Hold Voltage</b>	<b>Hold Power</b>	<b>Hold Voltage</b>	<b>Hold Power</b>
28	14 volts	2.8 watts	6 volts	0.51 watts
24	12 volts	3 watts	5 volts	0.52 watts
20	10 volts	3 watts	5 volts	0.76 watts
12	6 volts	3 watts	5 volts	2.1 watts

Note: Values for 7-watt coils may be different

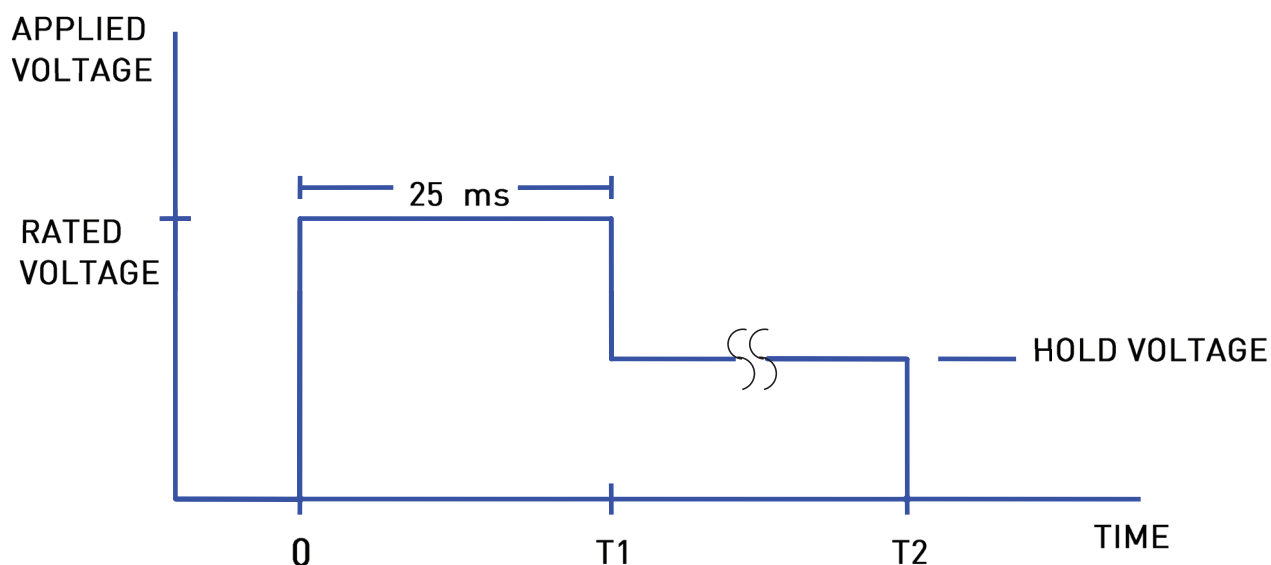

*Hold Voltage Graph*

## Ultra Low Leak Extreme Performance Valve

**Pulse Valves****Chemical Compatibility Chart**

Chemical	FFKM	PTFE	Stainless Steel	VespeI
DI Water	1	1	1	2
Methanol	1	1	1	1
Isopropanol	1	1	1	1
Ethanol	1	1	1	1
Acetonitrile	1	1	1	1
Tetrahydrofuran	1	1	1	2
Toluene	1	1	1	1
Organic Acids - Dilute	1	1	1	1
Non Organic Acids - Dilute	1	1	1	1
Bases - Dilute	1	1	1	1
Saline	1	1	1	1
Bleach 12%	1	1	2	4
Sodium Hydroxide 20%	1	1	1	4

COMPATIBILITY LEGEND		
1	<b>EXCELLENT</b>	Minimal or no effect
2	<b>GOOD</b>	Possible swelling and/or loss of physical properties
3	<b>DOUBTFUL</b>	Moderate or severe swelling and loss of physical properties
4	<b>NOT RECOMMENDED</b>	Severe effect and should not be considered

# Pulse Valves Ultra Low Leak Extreme Performance Valve Accessories

## IOTA ONE 060-0001-900 (Microfluidic Valve Driver)



### Ordering Information

Orifice Size	Pressure	Valve Type	Seal Material	Voltage	Inlet Porting	Outlet Porting	Part Number
0.004" (.10 mm)	Vac-1250 psi (86.2 bar)	2-Way NC	PTFE, FFKM	28V	1/4" A-Lok®	Flange, No Cone	009-1668-900
			Vespel, FFKM	20V			009-1670-900

Orifice Size	Pressure	Valve Type	Seal Material	Voltage	Inlet Porting	Outlet Porting	Part Number
0.020" (.51 mm)	Vac-1250 psi (86.2 bar)	2-Way NC	PTFE, FFKM	28V	1/4" A-Lok®	Flange, No Cone	009-0582-900
				20V		Flange, Exit Cone	009-0442-900
			Vespel, FFKM	20V	1/4" A-Lok®	Flange, No Cone	009-1421-900
					Flange, Exit Cone	009-0347-900	

Orifice Size	Pressure	Valve Type	Seal Material	Voltage	Inlet Porting	Outlet Porting	Part Number
0.031" (.79 mm)	Vac-1250 psi (86.2 bar)	2-Way NC	PTFE, FFKM	28V	1/4" A-Lok®	Flange, No Cone	009-0381-900
				20V		Flange, Exit Cone	009-0181-900
			Vespel, FFKM	20V	1/4" A-Lok®	Flange, No Cone	009-1671-900
					Flange, Exit Cone	009-0279-900	

Orifice Size	Pressure	Valve Type	Seal Material	Voltage	Inlet Porting	Outlet Porting	Part Number
0.039" (.99 mm)	Vac-750 psi (51.7 bar)	2-Way NC	PTFE, FFKM	28V	1/4" A-Lok®	Flange, No Cone	009-1669-900
			Vespel, FFKM	20V			009-1643-900

### Pulse Valve Rebuild Kits

Pulse Valve Rebuild Kits	Part Number
With Teflon Poppets	009-PTFE-KIT
With Vespel® Poppets	009-VSPL-KIT
With Kel-F® Poppets	009-KELF-KIT
With PEEK Poppets	009-PEEK-KIT
Kit Contents	Quantity Per Kit
Poppet	10
Buffer Spring	5
Load Spring	5
Internal Viton® O - Ring	5
External Viton® O - Ring	5
Teflon Coated Armature	1
Shims (Various Thicknesses)	40

Pulse Valve Poppet Kits	Part Number
PTFE Poppets Qty. 50pcs	003-0023-050-KIT
Kel-F® Poppets Qty. 50pcs	009-0185-020-KIT
Vespel® Poppets Qty. 10pcs	009-0595-020-KIT
PEEK Poppets Qty. 50pcs	009-0424-030-KIT
Pulse Valve Coils	Part Number
12 VDC	009-0280-050-2
20 VDC	009-0279-050-2
28 VDC	009-0181-050-2
Pulse Valve Bodies (Flange with conical discharge)	Part Number
0.020"(0.5 mm) Orifice	009-0309-010-003
0.031"(0.8 mm) Orifice	009-0181-010-003

NOTE: In order to provide the best possible solution for your application, please provide the following requirements when contacting Applications Engineering:

- Media, Inlet & Outlet Pressures
- Minimum Required Flow Rate
- System Supply Voltage
- Media
- Ambient Temperature Range

Please click on the Order On-line button (or go to [www.parker.com/precisionfluidics/pulse](http://www.parker.com/precisionfluidics/pulse)) to configure your Pulse Valve Ultra Low Leak Extreme Performance Valve. For more detailed information, visit us on the Web, or call 603-595-1500.



For more information call +1 603 595 1500 or email [ppfinfo@parker.com](mailto:ppfinfo@parker.com)  
Visit [www.parker.com/precisionfluidics](http://www.parker.com/precisionfluidics)



## Pulse Valves Ultra Low Leak Extreme Performance Valve Series 9 Accessory Kits

SERIES 9 Accessory Kits			
<b>Teflon Pulse Valve Kit - Contents</b>			<b>Qty</b>
	Teflon Poppet		10
	Buffer Spring		5
	Load Spring		5
	Internal Viton Oring		5
	External Viton Oring		5
	Teflon Coated Armature		1
	Shims (Various Thicknesses)		40
<b>Part Number</b>	<b>009-PTFE-KIT</b>		<b>1</b>
<b>VespeI Pulse Valve Kit - Contents</b>			<b>Qty</b>
	VespeI Poppet		5
	Buffer Spring		5
	Load Spring		5
	Internal Viton Oring		5
	External Viton Oring		5
	Teflon Coated Armature		1
	Shims (Various Thicknesses)		40
<b>Part Number</b>	<b>009-VSPL-KIT</b>		<b>1</b>
<b>Kel-f Pulse Valve Kit - Contents</b>			<b>Qty</b>
	Kel-f Poppet		10
	Buffer Spring		5
	Load Spring		5
	Internal Viton Oring		5
	External Viton Oring		5
	Teflon Coated Armature		1
	Shims (Various Thicknesses)		40
<b>Part Number</b>	<b>009-KELF-KIT</b>		<b>1</b>
<b>PEEK Pulse Valve Kit - Contents</b>			<b>Qty</b>
	PEEK Poppet		10
	Buffer Spring		5
	Load Spring		5
	Internal Viton Oring		5
	External Viton Oring		5
	Teflon Coated Armature		1
	Shims (Various Thicknesses)		40
<b>Part Number</b>	<b>009-PEEK-KIT</b>		<b>1</b>
<b>SERIES 9 POPPET KITS</b>			<b>Qty</b>
<b>Part Number</b>	003-0023-050-KIT	PTFE Poppets	50
<b>Part Number</b>	009-0185-020-KIT	Kel-F Poppets	50
<b>Part Number</b>	009-0595-020-KIT	VespeI Poppets	10
<b>Part Number</b>	009-0424-030-KIT	PEEK Poppets	50
<b>SERIES 9 ORINGS (Kalrez)</b>			<b>Qty</b>
<b>Part Number</b>	009-0070-100-001	Internal Kalrez Oring	1
<b>Part Number</b>	001-0045-020-001	External Kalrez Oring	1
<b>SERIES 9 COIL (1/4" A-LOK FITTING)***</b>			<b>Qty</b>
<b>Part Number</b>	009-0280-050-2	12 VDC	1
<b>Part Number</b>	009-0181-050-2	28 VDC	1
<b>Part Number</b>	009-0279-050-2	20 VDC	1
<b>SERIES 9 BODIES (Flange with conical discharge)</b>			<b>Qty</b>
<b>Part Number</b>	009-0309-010-003	.020" (0.5 mm)	1
<b>Part Number</b>	009-0181-010-003	.031" (0.8 mm)	1
<b>Part Number</b>	091-0351-010-003	.004" (0.1 mm)	1

Please contact customer service for order placement, leadtime and price

\*\*\*Series 9 coils shown do not ship with electrical connectors





## Pulse Valves Ultra Low Leak Extreme Performance Valve

### FAQs

#### 1. Can the IOTA One trigger both 20 and 28V pulse valves?

*Yes, the IOTA One can trigger 12, 20, 24, and 28V pulse valves. However, you will need to change the jumper settings in the unit, reference manual that ships with the unit. Please note current standard coil are 20 and 28V.*

#### 2. I used to purchase a pulse valve which is not listed in the chart above, is this pulse valve still available?

*Currently, only the pulse valve configurations listed in the chart above are available for purchase.*

#### 3. I used to purchase spare parts for my pulse valve, are they still available?

*Yes, spare parts are still available for pulse valves. Please note that only the kits and part numbers above are available for purchase. Poppets, armatures, springs, etc... are no longer available for individual purchase and will need to be purchased as part of a kit.*

#### 4. Can the IOTA One trigger multiple valves at once?

*Currently, the IOTA One is designed to trigger only one valve at a time.*

#### 5. What is the fastest pulse duration, opening response time and closing response time?

*Typically, the fastest achievable pulse duration is 300 microseconds, opening response time is 180-200 microseconds, and closing response time is 50-250 microseconds.*

#### 6. Which Poppet material should I choose and why?

*Poppet material should first be chosen based on compatibility with the gas you are flowing through the valve. If multiple materials are compatible then for general and low temperature and pressure applications PTFE and Kel-F should be used, for higher temperature and pressure applications Vespel or PEEK should be used.*

#### 7. Is there a performance advantage between the different voltage valves?


*The performance difference between voltages is negligible. However, please note that the 20V coil is capable of handling 125C temperatures.*

#### 8. What is the maximum cycle frequency for the valve?

*The maximum cycle frequency for the valve is 250Hz.*


# Value Added Application-Specific Solutions

## Gassing Control System



- Mixed gassing logic design includes VSO® proportional valves, X-Valve®, pressure switch, pressure sensors, and PCB interface

## 7 Position X-Valve® Pneumatic Manifold




- Integrated pressure/vacuum sensors
- Mixed pneumatic logic design
- Ultem® manifold pressure/vacuum sensors

## Vacuum Gas Control Module




- Tested to  $1 \times 10^{-7}$  cc/sec/atm Helium
- Assembly tested on mass spectrometer

## 6 Position VSO® Proportional Valve Pneumatic Manifold Assembly




- Quick connect fittings
- Circuit board with mass electrical termination

## 5 Position SRS Model Pneumatic Manifold




- Mixed pneumatic logic assembly
- Integrated pressure sensors
- Mass termination of sensors & valves
- Pressed in barbed fittings

## 8 Position SRS Model Pneumatic Manifold




- Integrated circuit board mounting
- Mass electrical termination

## 10 Position X-Valve® Pneumatic Manifold



- Mixed pneumatic logic design
- Ultra-miniature design with PCB for mass termination

## 10 Position SRS Model Pneumatic Manifold



- Circuit board with transducers
- Pressed in barbed fittings

For more information call +1 603 595 1500 or email [ppfinfo@parker.com](mailto:ppfinfo@parker.com)  
Visit [www.parker.com/precisionfluidics](http://www.parker.com/precisionfluidics)

## NOTES

---



## **WARNING**

**FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY OR PROPERTY DAMAGE.**

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or systems in the current product catalog. Due to the variety of operating conditions and applications for these products and systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.



Parker Hannifin Corporation  
**Precision Fluidics Division**  
26 Clinton Dr., Unit 103  
Hollis, NH 03049  
phone 603 595 1500  
fax 603 595 8080  
[www.parker.com/precisionfluidics](http://www.parker.com/precisionfluidics)