



02R Regulator



Features

- Compact, space saving design.
- High flow.
- Light weight.
- Relieving piston design provides excellent pressure regulation and allows reduction of downstream pressure when system is deadheaded.

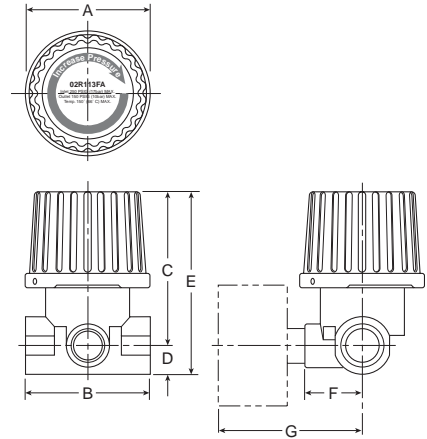

Port Size	Standard Pressure 0 to 125 PSIG (0 to 8.6 bar)
1/4"	02R113FA
	BP02R113FA*

* Consists of (50) pieces.

02R Regulator Dimensions						
A	B	C	D	E	F	G
1.65 (42)	1.63 (41)	1.97 (50)	0.33 (8)	2.30 (58)	0.75 (19)	1.88 (48)

Inches (mm)

CAUTION:


REGULATOR PRESSURE ADJUSTMENT – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design.

For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

WARNING

**Product rupture can cause serious injury.
 Do not connect regulator to bottled gas.
 Do not exceed maximum primary pressure rating.**

Technical Information

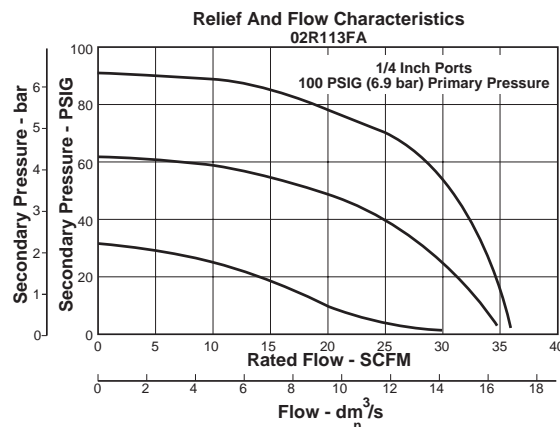

Specifications

Gauge Ports (1) 1/8 Inch
 Port Threads 1/4" NPT
 Pressure Rating 0 to 250 psig (0 to 17,2 bar)
 Temperature Rating 32°F to 125°F (0°C to 52°C)
 Secondary Pressure Range 0.3 to 125 psig (0 to 8,6 bar)
 Weight 0.3 lb. (150 g)

Adjusting Knob / Bonnet Filled Polyamide
 Body Zinc
 Bonnet, Seat, Piston Acetal
 Seals Nitrile Rubber

Accessory

Gauge: 0 to 160 psig, 1/8" NPT (0 to 11.0 bar) K4515N18160