


## AS 1000 Series AquaSensor



### Applications

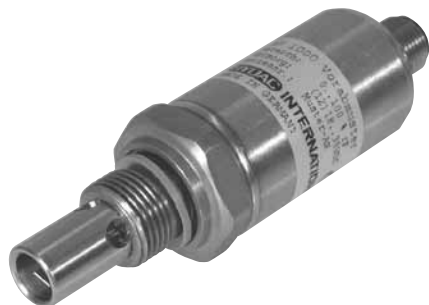


### Description

The AS 1000 series AquaSensor is a stationary, microprocessor based measurement unit for the continuous monitoring of the water saturation level and temperature in hydraulic and lubrication systems. The sensor measures the water content relative to the saturation concentration (*saturation point*) and output the degree of saturation (*saturation level*) in the range of 0 to 100% as a 4 - 20 mA signal. A reading of 0% would indicate fluid that is free of water, while a reading of 100% would indicate a fluid that is saturated with water.

### Water in Oil

It is almost certain that there is water present in hydraulic and lubrication systems. These systems should be operated without the presence of free or emulsified water. The most common sources of water entering a system are ambient humidity, "splash" from process water, and new oil. Water contamination will accelerate the aging process of the oil resulting in oil oxidation, additive depletion, reduced lubrication, corrosion and damaged components. Most of these costly problems can be avoided by monitoring the water content of the operating fluids.

Sometimes the water content is difficult to determine, but with the HYDAC AquaSensor, determining the amount of water is easy! The most practical method for monitoring water content in oil is as a percent of the saturation level. Different oils are capable of dissolving varying amounts of water, therefore they have varying water saturation curves. The curve (*below*) is an example of the typical relationship of water saturation level versus fluid temperature in hydraulic and lubrication oils. By looking at the example graph it can be seen that this fluid is capable of holding more water, or has a higher saturation level, as the temperature increases.

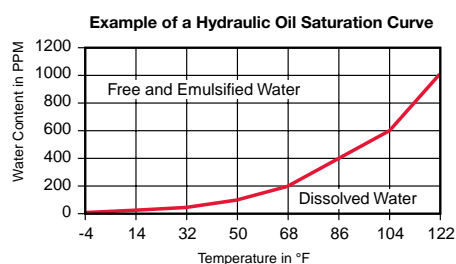

### Technical Details

Input Data	
Measuring range ( <i>temperature</i> )	-13° to 212°F (-25° to 100°C)
Measuring range ( <i>saturation level</i> )	0 to 100%
Operating pressure	-7 to 725 psi
Burst pressure	≤ 9000 psi
Parts in contact with fluid	Stainless steel, FPM or EPDM seal, ceramic with evaporated metal
Output Data - Humidity Measurement	
Output signal ( <i>saturation level</i> )	4 to 20 mA, 2 wire, $R_{Lmax} = (U_B - 10V) / 20 \text{ mA}$ [kΩ]
Calibrated accuracy	≤ ±2% FS max.
Accuracy in media measurements	≤ ±3% FS typ.
Pressure dependent	±0.2% FS / bar
Output Data - Temperature Measurement	
Output signal ( <i>temperature</i> )	4 to 20 mA, 2 wire, $R_{Lmax} = (U_B - 10V) / 20 \text{ mA}$ [kΩ]
Accuracy	≤ ±2% FS max.
Compensated temperature range	32° to 194°F (0° to 90°C)
Operating temperature range	-40° to 212°F (-40° to 100°C)
Storage temperature range	-40° to 212°F (-40° to 100°C)
Media temperature range	-40° to 257°F (-40° to 125°C)
Viscosity range	32 to 23175 SUS (1 to 5000 cSt)
Flow velocity	< 16 ft/sec
Permissible fluids	Fluids based on mineral oil and synthetic and natural esters
CE mark	EN 61000-6-1 / 2 / 3 / 4
Type of protection acc. DIN 40050	IP67
Other Data	
Supply voltage	12 to 32 V DC
Residual ripple	≤ 5%
Thread connection	G 3/8 BSPP male thread
Torque rating	18 ft-lbs (25 Nm)
Electrical connection	M12x1.5 pole (DIN VDE 0627)
Pin 1: +Ub	
Pin 2: Signal saturation level	
Pin 3: 0V / GND	
Pin 4: Signal temperature	
Pin 5: HSI (HYDAC Self Identification)	
Reverse polarity protection of the supply voltage and short circuit protection	Standard
Weight	approx. 145 g

note: FS (Full Scale) = relative to the full measuring range


## Model Code

<b>Series</b>	AS	=	AquaSensor	AS	1	X	0	8	-	C	-	000
<b>Measuring Range</b>	1	=	Saturation level 0 to 100%; Temperature -13° to 212°F (-25° to 100°C)									
<b>Fluids</b>	0	=	Mineral oils									
	1	=	Phosphate esters (HFD-R)									
<b>Mechanical Connection</b>	0	=	G 3/8A DIN 3852									
<b>Electrical Connection</b>	8	=	Plug M12x1, 5-pole (connector not included)									
<b>Signal Technology</b>	C	=	Saturation level 4 to 20 mA (0 to 100%), Temperature 4 to 20 mA (-25° to 100°C)									
<b>Modification Number</b>	000	=	Standard									

### Items supplied

- AquaSensor
- Operation Manual

## Circuit Connection

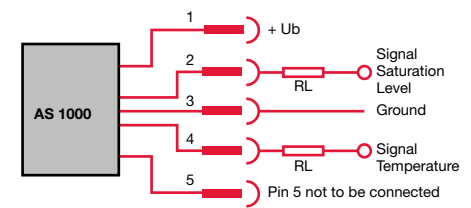

### Color Codes for connectors with cables:

- 1 = brown
- 2 = white
- 3 = blue
- 4 = black
- 5 = gray

## Accessories

### ZBE 08 Connector

5 Pole M12x1 90°

### ZBE 08 connector only (IP65)

Part #06006786

### ZBE 08-02 with 6' cable (IP67)

Part #06006792

### ZBE 08-05 with 15' cable (IP67)

Part #06006791

### HDA 5500-0-0-AC-000 Display

Part #00908861

### HDA 5500-0-0-DC-000 Display

Part #00908862

### HDA 5500-1-0-DC-000 Display

Part #00908868

### HDA 5500-1-1-AC-000 Display

Part #00908869


### HDA 5500-1-1-DC-000 Display

Part #00908870

## AS 1000 G1/4 Housing Block Adapter

Part #03182134

Purchase separately

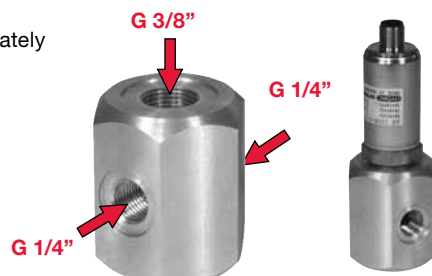

## Dimensions

