



O ORIGA

ORIGA-SENOFLEX Displacement Measuring System for Cylinder Series OSP-P

B



Overview.....	B112
Technical Data SFI-plus.....	B113
Dimensions SFI-plus	B114
Order Information	B115



B111

www.comoso.com

Parker Hannifin Corporation
Parker-Origa
Glendale Heights, Illinois
www.parker.com/pneu/rodless

ORIGA- Sensoflex

Displacement measuring system
for automated movement

Series SFI-plus
(incremental measuring system)

B

for cylinder series

- OSP-P...

Characteristics

- Contactless magnetic displacement measurement system
- Displacement length up to 32 m
- Resolution 0.1 mm (option: 1 mm)
- Displacement speed up to 10 m/s
- For linear and non-linear rotary motion
- Suitable for almost any control or display unit with a counter input



The SFI-plus magnetic displacement measuring system consists of 2 main components.

• Measuring Scale

Self-adhesive magnetic measuring scale

• Sensing Head

Converts the magnetic poles into electrical signals which are then processed by counter inputs downstream
(e.g. PLC, PC, digital counter)

Characteristics			
Characteristics	Unit	Description	
Type		21210	21211
Output Function			
Resolution	mm	0.1	1
Pole lengths magnetic scale	mm	5	
Maximum speed	m/s	10	
Repeat accuracy		± 1 Increment	
Distance between sensor and scale	mm	≤ 4	
Tangential deviation		≤ 5°	
Lateral deviation	mm	≤ ± 1.5	
Switching output		PNP	
Electrical Characteristics			
Operating voltage U _b	V DC	18 – 30	
Voltage drop	V	≤ 2	
Continuous current for each output	mA	≤ 20	
Power consumption at U _b = 24V, switched on, without load	mA	≤ 50	
Short-circuit protection		yes	
Reverse polarity protection			yes
Protection from inductive load		yes	
Power-up pulse suppression		yes	
EMC			
Electrostatic discharge immunity	kV	6, B, to EN 61000-4-2	
Electromagnetic field immunity	V/m	10, A, to EN61000-4-3	
Electrical fast transient/burst immunity (for signal connections)	kV	1, B, to EN 61000-4-4	
Electrical fast transient/burst immunity (for DC connections)	kV	2, B, to EN 61000-4-4	
Surge immunity (for signal connections)	kV	1, B, to EN 61000-4-5	
Surge immunity (for DC connections)	kV	0,5, B, to EN 61000-4-5	
Immunity to conducted disturbances	V	10, A, to EN 61000-4-6	
Power frequency magnetic field immunity at 50 Hz	A/m	30, A, to EN 61000-4-8	
Emission standard for residential		to EN 61000-6-4	
Radio disturbance characteristics		to EN 55011, Group 1, A	
Mechanical Characteristics			
Housing		Aluminum	
Cable length	m	5.0 – fixed, open end	
Cable cross section	mm ²	4 x 0.14	
Cable type		PUR, black	
Bending radius	mm	≥ 36	
Weight (mass)	kg	ca. 0.165	
Environmental Conditions / Shock Resistance			
Degree of protection	IP	67 to EN60529	
Ambient temperature range	°C	-25 to +80	
Broad-band random vibration to EN 60068-2-64	g	5, 5 Hz to 2 kHz, 0.5 h each axis	
Vibration stress to EN 60068-2-6	g	12, 10 Hz to 2 kHz, 2 mm, 5 h each axis	
Shock to EN 60068-2-27	g	100, 6 ms, 50 bumps each axis	
Bump to EN 60068-2-29	g	5, 2 ms, 8000 bumps each axis	

Displacement Measuring System

for automated movement

ORIGA-Sensoflex
(incremental displacement measuring system)

B

Series SFI-plus for cylinder series

- OSP-P...

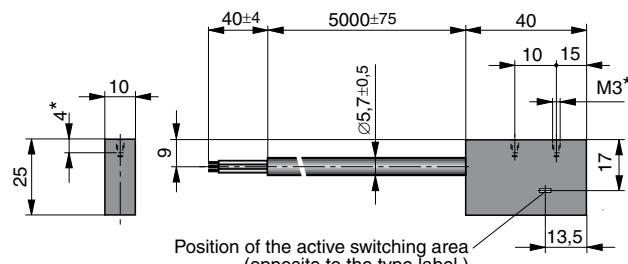
Note:

For combinations Active Brake AB + SFI-plus + Magnetic Switch contact our technical department please.



Sensing Head

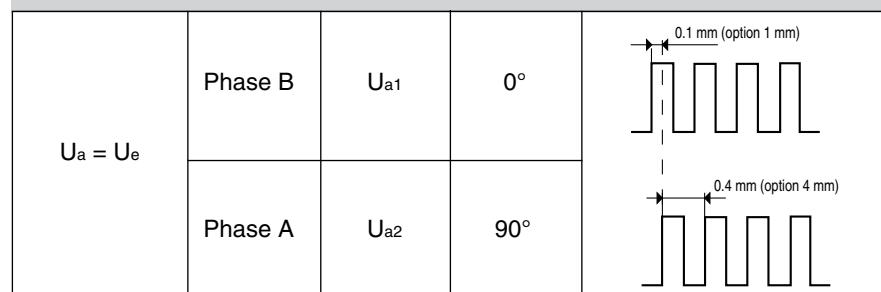
The sensing head provides two pulsating, 90° out of phase counter signals (phase A/B) with a 0.4 mm resolution (option 4 mm). External processing can improve the resolution to 0.1 mm (option 1 mm). The counting direction can be determined automatically from the phase variance of the counter signals.

Dimensions (mm) – Sensing Head

* Maximum thread depth 4mm

Electrical Connection

Color	Description
bn = brown	+ DC
bu = blue	- DC
bl = black	Phase A
wt = white	Phase B

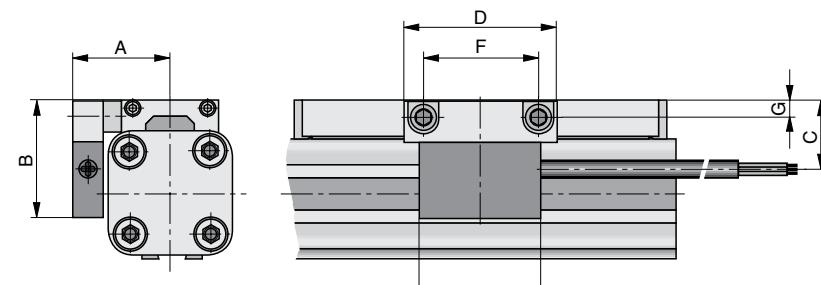
Output signal – Sensing Head**SFI-plus mounted on a rodless cylinder series OSP-P**

The SFI-plus system can be mounted directly on a rodless OSP-P cylinder with the special mounting kit.

The position of the sensing head is generally 90° to the carrier.



Combinations consisting of SFI-plus and OSP-P Cylinders with guides are available on request.

Dimensions – in combination with OSP-P cylinders**Dimension Table (mm)**

Series	A	B	C	D	F	G	H
OSP-P25	32	39	23	50	38	5.5	40
OSP-P32	37.5	46	30	50	38	6.5	40
OSP-P40	42.5	50	34	50	38	6.5	40
OSP-P50	49.5	55	39	50	38	6.5	40
OSP-P63	59.5	65	49	50	38	10	40
OSP-P80	72.5	80	64	50	38	12	40

Order instructions

Description	Order No.
Sensing head with measuring scale – Resolution 0.1 mm (scale length = required measuring distance + a minimum of – see table below)	21240
Option: Sensing head with measuring scale – Resolution 1 mm (scale length = required measuring distance + a minimum of – see table below)	21241
Sensing head – Resolution 0.1 mm (spare part)	21210
Option: Sensing head – Resolution 1 mm (spare part)	21211
Measuring scale per meter (spare part)	21235
Mounting kit for OSP-P25	21213
Mounting kit for OSP-P32	21214
Mounting kit for OSP-P40	21215
Mounting kit for OSP-P50	21216
Mounting kit for OSP-P63	21217
Mounting kit for OSP-P80	21218

* Overall length of the measuring scale results from stroke length of the cylinder + dead length
Dead length for linear drives series OSP-P see table.

Series	Dead length (mm)
OSP-P 25	154
OSP-P 32	196
OSP-P 40	240
OSP-P 50	280
OSP-P 63	350
OSP-P 80	422

Example:

Cylinder OSP-P, Ø25 mm, stroke length 1000 mm

dead length + stroke length = overall length of the measuring scale
154 mm + 1000 mm = 1154 mm

B

B



B116

www.comoso.com

Parker Hannifin Corporation
Parker-Origa
Glendale Heights, Illinois
www.parker.com/pneu/rodless