

## Datasheet - BN 120-10Z

Magnetic reed switch / BN 120

☒ Preferred typ



(Minor differences between the printed image and the original product may exist!)

- Non-contact principle
- Actuation from side
- with bias magnet
- Long life
- Thermoplastic enclosure
- Actuating distance up to 60 mm depending on actuating magnet and version
- Design Ø 10.7 mm
- with central mounting
- With pre-wired cable


### Ordering details

Product type description	BN 120-10Z
Article number	101186839
EAN code	4030661335407

### Approval

Approval	-
----------	---

### Global Properties

Product name	BN 120
Standards	-
Compliance with the Directives (Y/N) 	Yes
suitable for elevators (Y/N)	Yes
Mounting	central with threaded flange M12 x 1
Active principle	Magnetic drive
Materials	
- Material of the housings	Plastic, glass-fibre reinforced thermoplastic
- Material of the cable mantle	LiYY
Housing construction form	cylinder, thread
Weight	30 g
Recommended actuator	BP 10, 2 x BP 10, BP 15, 2 x BP 15, 2 x BP 15/2, BP 34, BP 20, BP 31,

- Lift switchgear

BP 11, BP 12, BP 21

BP 10, 2 x BP 10, 2 x BP 15/2, BP 15, 2 x BP 15, BP 34

## Mechanical data

Design of electrical connection	Cable
Cable length	1 m
Conductors	2 x 0,25 mm <sup>2</sup>
AWG-Number	23
Mechanical life	min. 10.000.000 operations
Electrical lifetime	1.000.000 ... 10.000.000 operations
Actuating planes	Actuation from side
Switch distance S <sub>n</sub>	5 mm ... 50 mm BP 10 = 5 mm 2 x BP 10 = 17 mm BP 15 = 6 mm 2 x BP 15 = 17 mm 2 x BP 15/2 = 17 mm BP 34 = 15 ... 20 mm BP 20 = 20 mm BP 31 = 20 mm BP 11 = 20 mm BP 12 = 10 ... 30 mm BP 21 = 25 ... 50 mm
- notice	Actuating distance up to 50 mm depending on actuating magnet and version  The specifications with regard to the switching distances apply to the actuation of the individually mounted devices without ferromagnetic influence. Any change of the distance, positive either negative, is possible due to ferromagnetic interference. When multiple actuating magnets are used, the mutual interference must be observed.
Type of actuation	Magnet
restistance to shock	30 g / 11 ms
Resistance to vibration	10 ... 55 Hz, Amplitude 1 mm
Bounce duration	0,15 ms
Latching (Y/N)	No
bias magnet (Y/N)	Yes
Tightening torque for nuts	max. 90 Ncm
Actuating speed	max. 18 m/s
Switching point accuracy	± 0,25 mm

## Ambient conditions

Ambient temperature	
- Min. environmental temperature	-25 °C
- Max. environmental temperature	+70 °C
Protection class	IP67 to IEC/EN 60529

## Electrical data

Design of control element	Normally open contact (NO)
Number of shutters	1 piece
Number of openers	0 piece
Switching time - Close	0,35 ms
Switching time - Open	-
Switch frequency	< 300 Hz
Dielectric strength	580 V

Switching voltage	max. 200 VAC
Switching current	max. 1 A
Switching capacity	max. 30 VA / W

## Outputs

Design of control output	Reed kontakts
--------------------------	---------------

## LED switching conditions display

LED switching conditions display (Y/N)	No
--	----

## ATEX

Explosion protection categories for gases	None
Explosion protected category for dusts	None

## Dimensions

Dimensions of the sensor	
- Length of sensor	71 mm
- Diameter of sensor	10.7 mm

## notice

The opening and closing functions depend on the direction of actuation, the actuating magnets and the polarity of the actuating magnets.


When the switches and actuators come together, the colours must coincide: Red (S) to red (S) and green (N) to green (N). This does not apply to the bistable contact.

The switch is to be mounted on iron with a non-magnetic layer of at least 20 mm.

## Included in delivery


Actuators must be ordered separately.

## Diagram

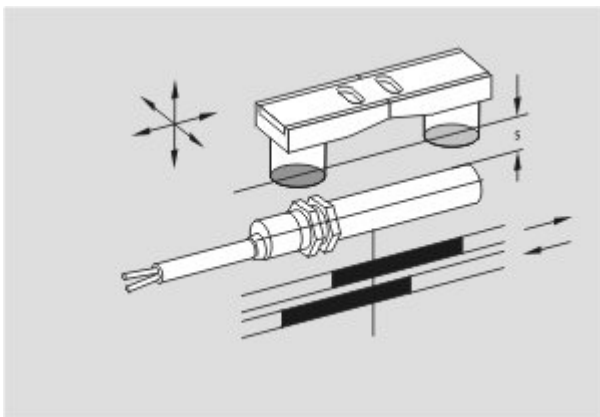

Note Diagram

- positive break NC contact
- active
- no active
- Normally-open contact


 Normally-closed contact

## Switch travel diagram





Notes Switch travel diagram

 Contact closed

 Contact open

 Setting range

 Break point

 Positive opening sequence/- angle

**VS** adjustable range of NO contact

**VÖ** adjustable range of NC contact

**N** after travel

## Documents

**Mounting and wiring instructions** (de, en, fr) 103 kB, 03.08.2006

Code: m\_bn1p02

**notice - Switch distance** (it) 27 kB, 12.04.2013

Code: s\_bn\_p01\_it

**notice - Switch distance** (fr) 29 kB, 12.04.2013

Code: s\_bn\_p01\_fr

**notice - Switch distance** (en) 27 kB, 12.04.2013

Code: s\_bn\_p01\_en


**notice - Switch distance** (de) 28 kB, 12.04.2013

Code: s\_bn\_p01\_de


**notice - Switch distance** (es) 28 kB, 12.04.2013

Code: s\_bn\_p01\_es

## Images

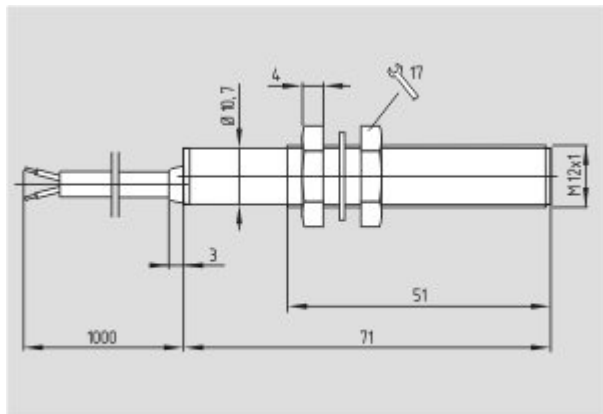


Dimensional drawing (basic component)

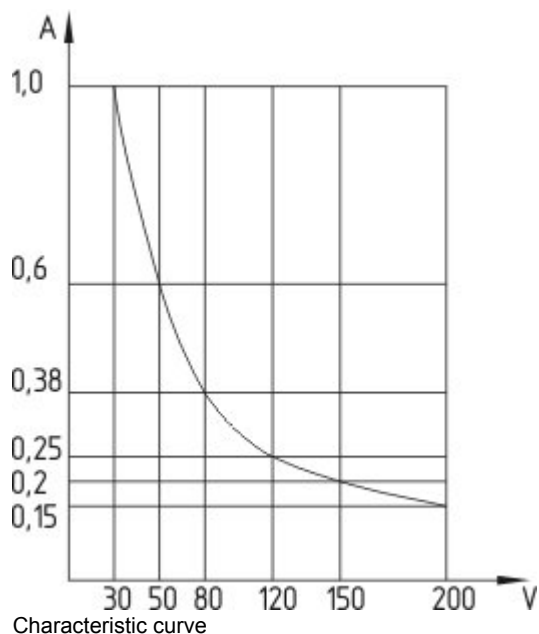


## System components

### Actuator



#### 101057553 - BP 34

- thermoplastic enclosure
- S-pole marked red
- N-pole marked green
- Suitable for mounting on ferrous material with a distance of 25 mm



#### 101060163 - BP 15

- thermoplastic enclosure
- N-pole marked green
- S-pole marked red
- Suitable for mounting on ferrous material with a distance of 18 mm



#### 101060165 - BP 15/2

- Unenclosed
- Polarity stamped in
- Suitable for mounting on ferrous material with a distance of 18 mm



#### 101057531 - BP 10

- Unenclosed
- Colour coding of poles by labels

