


# Proportional pressure and flow control type **QVHMZO, QVKMZOR**

independent pressure and 3-way compensated flow regulation, ISO 4401 size 06 and 10

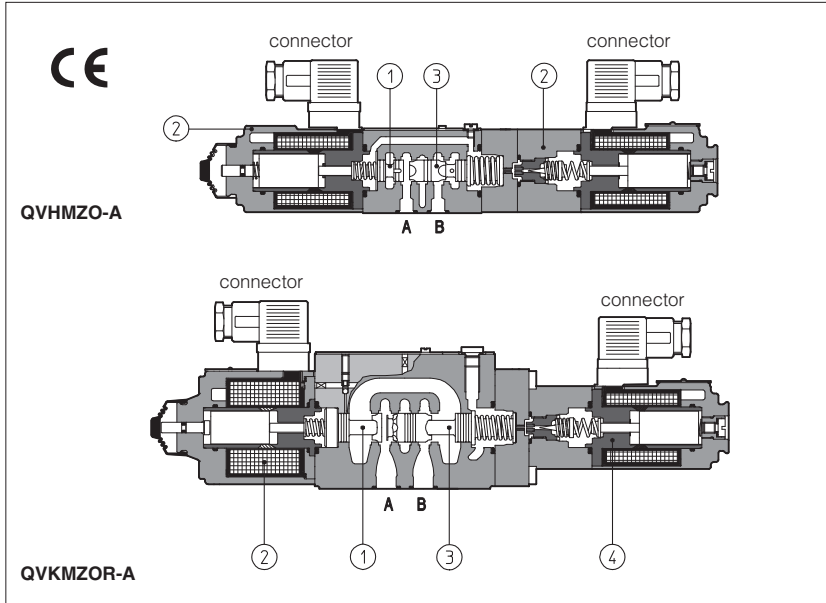

QVHMZO and QVKMZOR are proportional valves, direct operated, which provide independent pressure and 3-way compensated flow controls according to the electronic reference signals.

They operate in association with electronic drivers, see section 8 which supply the proportional valves with correct current signal to align valve regulation to the reference signal supplied to the electronic driver.

The flow is controlled by a throttle ①, directly operated by the proportional solenoid ②. The mechanical pressure compensator ③ keeps a constant  $\Delta p$  across the throttle ①, thus the regulated flow is independent to the load conditions.

The exceeding flow is returned to tank through the port P.

The pressure is controlled by the compensator ③, piloted by the proportional pressure relief valve ④.

The coils are fully plastic encapsulated (insulation class H) and valves have anti-vibration, antishock and weather-proof features.

Surface mounting: ISO 4401, size 06 and 10. Max flow respectively up to 45 l/min and 90 l/min.

Max pressure = 210 bar.

## 1 MODEL CODE

**QVKMZOR - A - 10 / 65 / 210 / \* \*\* / \***

Pressure compensated flow control valves

**QVHMZO** = size 06  
**QVKMZOR** = size 10

**A** = without position transducer

Valve size, see section 2

**06** = ISO 4401, size 06  
**10** = ISO 4401, size 10

Max regulated flow:

for <b>QVHMZO</b> :	for <b>QVKMZOR</b> :
<b>30</b> = 35 l/min	<b>65</b> = 65 l/min
<b>40</b> = 45 l/min	<b>90</b> = 90 l/min

max pressure:

**210** = 210 bar


Seals material:  
omit for NBR (mineral oil & water glycol)  
**PE** = FPM

Series number

**Coil voltage (only for -A execution)**

- = standard coil for 24V<sub>DC</sub> Atos drivers  
**6** = optional coil for 12V<sub>DC</sub> Atos drivers  
**18** = optional coil for low current drivers

## 2 HYDRAULIC CHARACTERISTICS (based on mineral oil ISO VG 46 at 50 °C)

Hydraulic symbols				
<b>Note:</b> Port T must always be plugged.				
Valve model	<b>QVHMZO-A-06</b>		<b>QVKMZOR-A-10</b>	
Max regulated flow [l/min]	35	45	65	90
Min regulated flow [cm <sup>3</sup> /min]	50	60	85	100
Regulating $\Delta p$ [bar]	10-12	15	6 - 8	10 - 12
Max flow on port A [l/min]	50	55	70	100
Max regulating pressure [bar]	210			
Response time 0÷100% step signal (1) [ms]	30		45	
Hysteresis [% of the regulated max flow]	≤ 5		≤ 5	
Linearity [% of the regulated max flow]	≤ 3		≤ 3	
Repeatability [% of the regulated max flow]	≤ 1		≤ 1	

Above performance data refer to valves coupled with Atos electronic drivers, see sections 8.

(1) Response times at step signal (0%→100%) are measured from 10% to 90% of step value and are strictly referred to the valve regulation.

### 3 MAIN CHARACTERISTICS OF PROPORTIONAL PRESSURE AND FLOW VALVES TYPE QVHMZO-A AND QVKMZOR-A


Assembly position	Any position
Subplate surface finishing	Roughness index Ra 0,4 - flatness ratio 0,01/100 (ISO 1101)
Ambient temperature	-20°C ÷ +70°C for -A execution
Fluid	Hydraulic oil as per DIN 51524 ... 535 for other fluids see section I
Recommended viscosity	15 ÷ 100 mm <sup>2</sup> /s at 40°C (ISO VG 15÷100)
Fluid contamination class	ISO 4406 class 20/18/15 NAS 1638 class 9, in line filters of 10 μm (β <sub>10</sub> ≥ 75 recommended)
Fluid temperature	-20°C +60°C (standard seals) -20°C +80°C (/PE seals)

#### 3.1 Coils characteristics

Valve model		QVHMZO-A			QVKMZOR-A		
		Standard	option /6	option /18	Standard	option /6	option /18
Coil resistance R at 20°C	pressure	3 ÷ 3,3 Ω	2 ÷ 2,2 Ω	13 ÷ 13,4 Ω	3 ÷ 3,3 Ω	2 ÷ 2,2 Ω	13 ÷ 13,4 Ω
Max. solenoid current	pressure	2,6 A	3,25 A	1,5 A	2,6 A	3,25 A	1,5 A
Coil resistance R at 20°C	flow	3 ÷ 3,3 Ω	2 ÷ 2,2 Ω	13 ÷ 13,4 Ω	3,8 ÷ 4,1 Ω	2,2 ÷ 2,4 Ω	12 ÷ 12,5 Ω
Max. solenoid current	flow	2,2 A	2,75 A	1,2 A	2,6 A	3,25 A	1,2 A
Max. power		30 Watt			35 Watt		
Protection degree (CEI EN-60529)		IP65					
Duty factor		Continuous rating (ED=100%)					

### 4 ELECTRIC WIRING

Electric wiring to reference generators must be made using shielded cables: the sheat must be connected to the power supply zero **on the generator side**. The power supply must be properly stabilized or rectified and filtered. For complete electric wiring with all available options, see section G

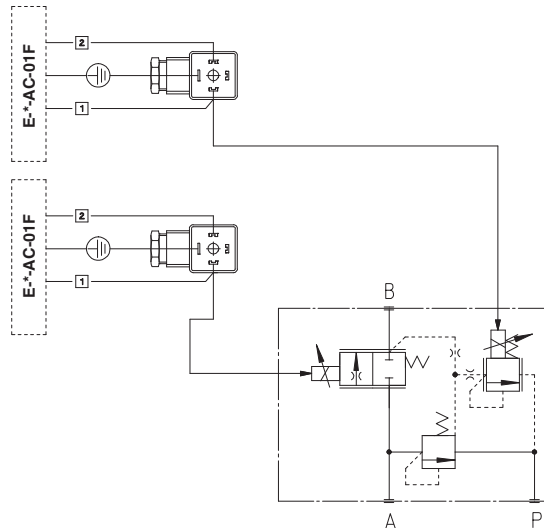


PIN	Connector
1	COIL LEAD
2	COIL LEAD
⊕	EARTH CONDUCTOR

**Note:**

In case the A inlet flow is < 18 l/min for QVHMZO and < 25 l/min for QVKMZOR, a check valve with cracking pressure 2 bar is suggested in P port to improve the valve stability.

**Note:** basic information for commissioning and start-up are present on installation notes always enclosed to the specific technical tables and relevant components.

### 5 TYPICAL APPLICATION SKETCH


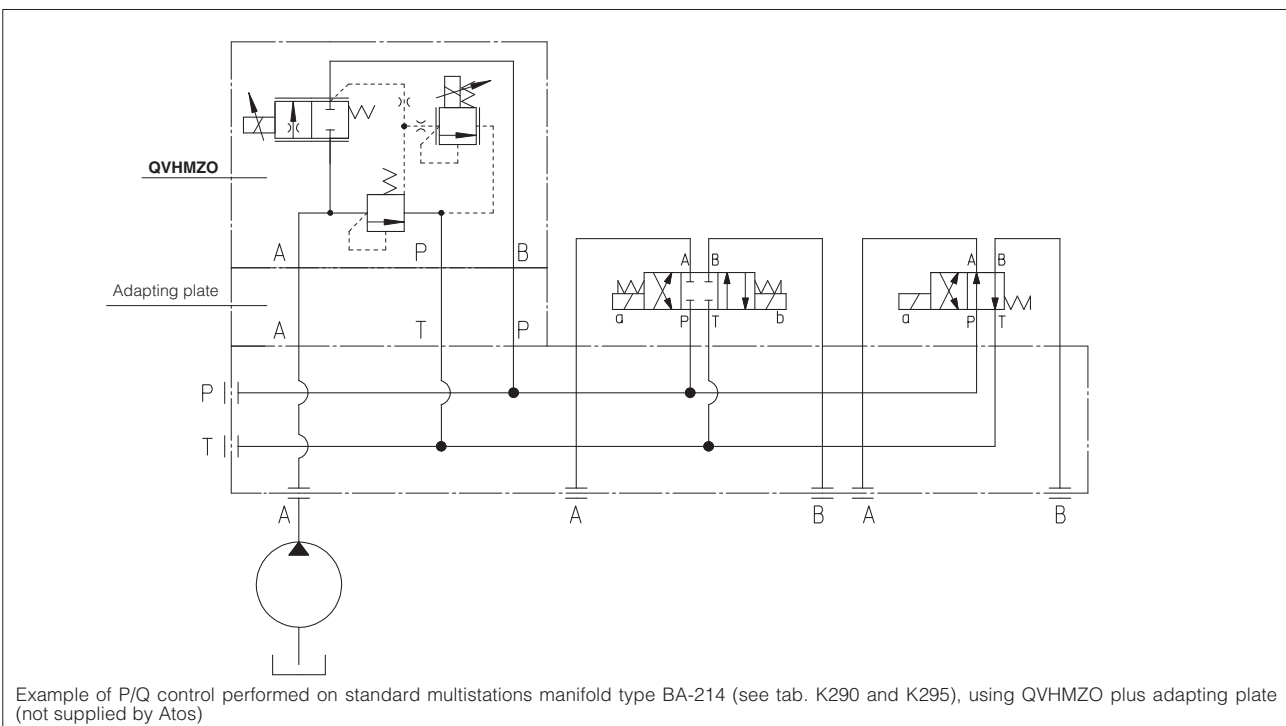


Example of P/Q control performed on standard multistations manifold type BA-214 (see tab. K290 and K295), using QVHMZO plus adapting plate (not supplied by Atos)

**6 DIAGRAMS** (based on mineral oil ISO VG 46 at 50 °C)



**6.1 Flow regulation diagrams**

- 1 = QVHMZO-A-06/30
- 2 = QVHMZO-A-06/40
- 3 = QVKMZOR-A-10/65
- 4 = QVKMZOR-A-10/90

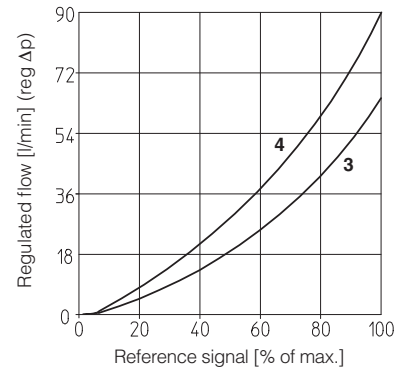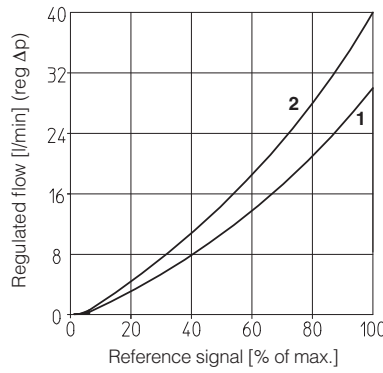



**6.2 Pressure regulation diagrams**

- 1 = QVHMZO-A-06/30
- 2 = QVHMZO-A-06/40
- 3 = QVKMZOR-A-10/65
- 4 = QVKMZOR-A-10/90

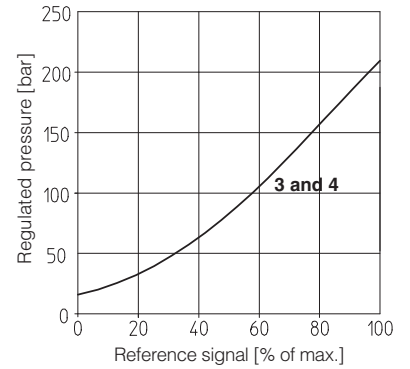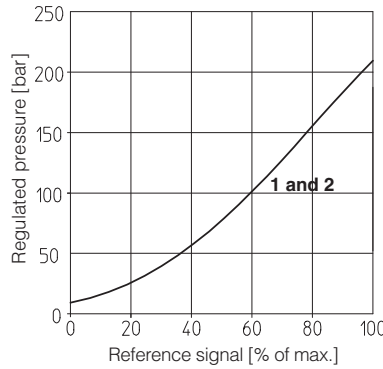



**6.3 Regulated flow/outlet pressure diagrams**  
with inlet pressure = 210 bar

- 1 = QVHMZO-A
- 2 = QVKMZOR-A

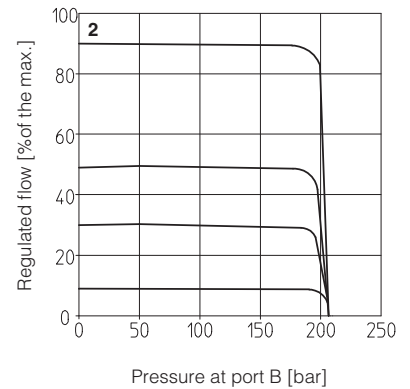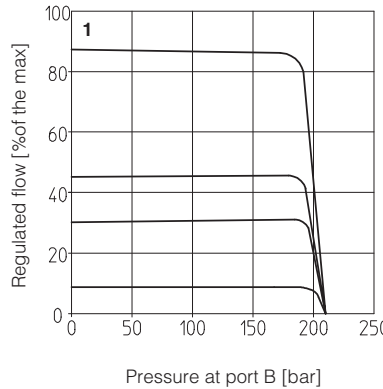


**6.4 Flow A→P/Δp diagrams**  
3-way configuration

- 1 = QVHMZO-A-06/30
- 2 = QVHMZO-A-06/40
- 3 = QVKMZOR-A-10/65
- 4 = QVKMZOR-A-10/90

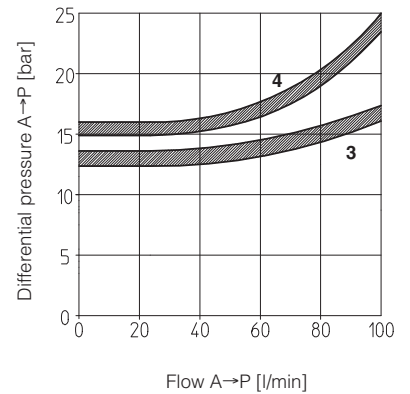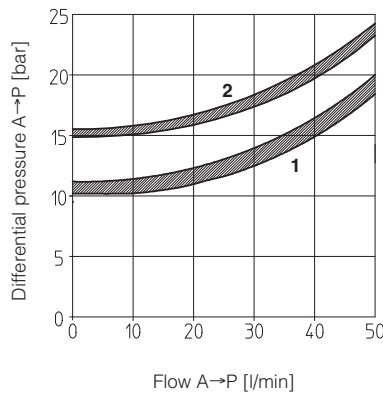



7 INSTALLATION DIMENSIONS [mm]

**QVHMZO**




**ISO 4401: 2005**  
**Mounting surface: 4401-03-02-0-05**  
 Fastening bolts:  
 4 socket head screws M5x50 class 12.9  
 Tightening torque = 8 Nm  
 Seals: 4 OR 108;  
 Diameter of ports A, B, P, T:  
 Ø 7,5 mm (max)

**A** = INLET PORT  
**B** = OUTLET PORT  
**P** = DISCHARGE PORT  
**T** = NOT USED  
 (it must be plugged)

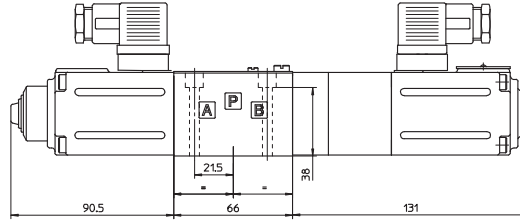



Mass: 2,8 kg

**QVKMZOR**



**ISO 4401: 2005**  
**Mounting surface: 4401-05-04-0-05**  
 Fastening bolts:  
 4 socket head screws M6x40 class 12.9  
 Tightening torque = 15 Nm  
 Seals: 5 OR 2050;  
 Diameter of ports A, B, P, T: Ø 11,2 mm (max)

**A** = INLET PORT  
**B** = OUTLET PORT  
**P** = DISCHARGE PORT  
**T** = NOT USED  
 (it must be plugged)

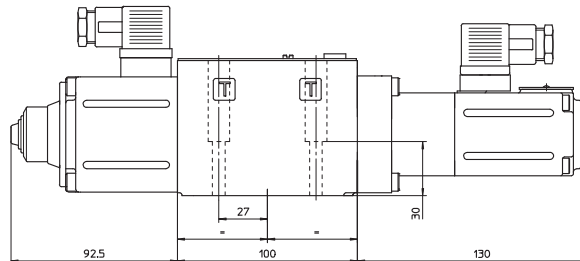

Mass: 4,3 kg

8 ELECTRONIC DRIVERS FOR QVHMZO-A AND QVKMZOR-A

Valve model	-A					
Drivers model	E-MI-AC-01F	E-MI-AS-IR	E-BM-AC-011F	E-BM-AS	E-ME-AC-01F	E-RP-AC-01F
Data sheet	G010	G020	G025	G030	G035	G100

For complete information about the drivers characteristics and relevant options, see the technical data sheet specified in the table.

9 MOUNTING PLATES

Size	Model	Ports location	Gas ports A, B, P, T	Ø Counterbore A, B, P, T	Mass [kg]
06	BA-202	Ports A, B, P, T underneath;	3/8"	-	1,2
	BA-204	Ports P, T underneath; ports A, B on lateral side	3/8"	25,5	1,8
	BA-302	Ports A, B, P, T (X, Y) underneath;	1/2" (1/8")	30 (16,5)	1,8
10	BA-308	Ports A, B, P, T underneath;	1/2"	30	2,5
	BA-428	Ports A, B, P, T underneath;	3/4"	36,5	5,5
	BA-434 (Y)	Ports P, T (X, Y) underneath; A, B on lateral side	3/4" (1/4")	36,5 (21,5)	8,5