

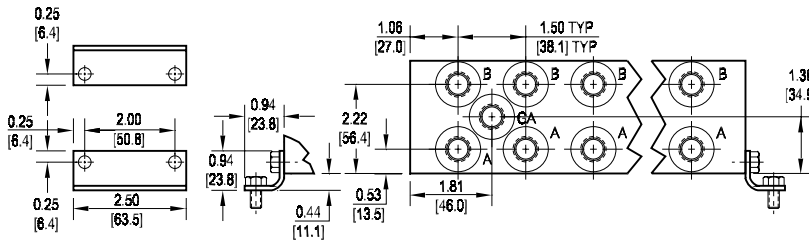
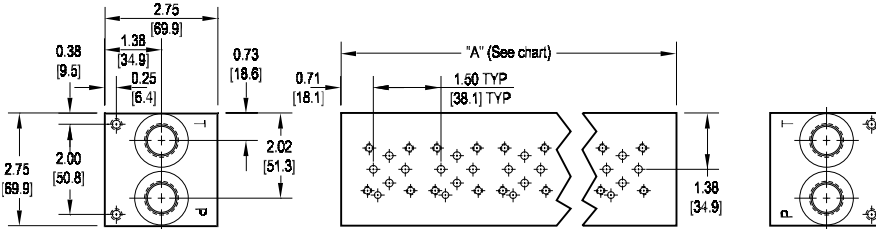


D02 Parallel Circuit Manifold

Parallel Circuit



Flow Curve



All mounting hardware is supplied.
See page 62 for itemized list.

No. of stations	* 01	02	03	04	05	06	07	08	09	10
"A" length inch [mm]	2.13 [54.0]	3.63 [92.1]	5.13 [130.2]	6.63 [168.3]	8.13 [206.4]	9.63 [244.5]	11.13 [282.6]	12.63 [320.7]	14.13 [358.8]	15.63 [396.9]
apx. weight alum lb [kg]	3 [1.5]	5 [2.5]	7 [3]	8 [4]	10 [4.5]	12 [5.5]	14 [6]	16 [7]	17 [8]	19 [9]
apx. weight iron lb [kg]	5 [2.5]	8.5 [4]	12 [5.5]	16 [7]	19 [9]	23 [10]	26 [12]	30 [14]	33 [15]	37 [17]

Port code	Valve mtg.	Manifold mtg.
P, S	#10-24 UNC x 0.56 [14] DP	0.25-20 UNC x 0.38 [9.7] DP
B, M, T	M5 ISO 6H x 0.56 [14] DP	M6 ISO 6H x 0.38 [9.7] DP

* Length of 01 station with relief cavity is 3.13 [79.4]. Gauge port not available on 01 station.


Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation. Download latest catalog page revisions at www.daman.com.

Ordering Information

Material	Valve Pattern	Circuit	No. of Stations	Valve Spacing	Port Threads	/	Options																																																																		
<table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2">Material</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>Aluminum - 6061-T6 3000† psi • 20.7 MPa</td> </tr> <tr> <td>D</td> <td>Ductile Iron - D4512 5000† psi • 34.5 MPa</td> </tr> <tr> <td colspan="2">† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.</td> </tr> </tbody> </table>	Material		A	Aluminum - 6061-T6 3000† psi • 20.7 MPa	D	Ductile Iron - D4512 5000† psi • 34.5 MPa	† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.		<table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2">Valve Pattern</th> </tr> </thead> <tbody> <tr> <td>D02</td> <td>ISO 4401-02-01 NFPA T3.5.1-D02 See Tech Information</td> </tr> </tbody> </table>	Valve Pattern		D02	ISO 4401-02-01 NFPA T3.5.1-D02 See Tech Information	<table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2">Circuit</th> </tr> </thead> <tbody> <tr> <td>P</td> <td>Parallel Circuit</td> </tr> </tbody> </table>	Circuit		P	Parallel Circuit	<table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2">No. of Stations</th> </tr> </thead> <tbody> <tr> <td colspan="2">Aluminum</td> </tr> <tr> <td>01...10</td> <td>Available with spacing code 1</td> </tr> <tr> <td colspan="2">Ductile Iron</td> </tr> <tr> <td>01...10</td> <td>Available with spacing code 1</td> </tr> </tbody> </table>	No. of Stations		Aluminum		01...10	Available with spacing code 1	Ductile Iron		01...10	Available with spacing code 1	<table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2">Valve Spacing</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1.50 inch 38.1 mm</td> </tr> </tbody> </table>	Valve Spacing		1	1.50 inch 38.1 mm	<table border="1" style="width: 100%;"> <thead> <tr> <th colspan="4">Port Threads</th> </tr> <tr> <th></th> <th>P & T</th> <th>A & B</th> <th>GA</th> </tr> </thead> <tbody> <tr> <td>P</td> <td>NPTF • ANSI B1.20.3</td> <td>0.50</td> <td>0.38</td> <td>0.25</td> </tr> <tr> <td>S</td> <td>SAE • ISO 11926</td> <td>-8</td> <td>-6</td> <td>-6</td> </tr> <tr> <td>B</td> <td>BSPP • ISO 1179</td> <td>0.50</td> <td>0.38</td> <td>none</td> </tr> <tr> <td>M</td> <td>ISO • ISO 6149</td> <td>M18</td> <td>M14</td> <td>none</td> </tr> <tr> <td>T</td> <td>BSPT • ISO 7</td> <td>0.50</td> <td>0.38</td> <td>none</td> </tr> </tbody> </table>	Port Threads					P & T	A & B	GA	P	NPTF • ANSI B1.20.3	0.50	0.38	0.25	S	SAE • ISO 11926	-8	-6	-6	B	BSPP • ISO 1179	0.50	0.38	none	M	ISO • ISO 6149	M18	M14	none	T	BSPT • ISO 7	0.50	0.38	none	<table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2">Options</th> </tr> </thead> <tbody> <tr> <td colspan="2">See next page for available options and ordering codes.</td> </tr> </tbody> </table>	Options		See next page for available options and ordering codes.	
Material																																																																									
A	Aluminum - 6061-T6 3000† psi • 20.7 MPa																																																																								
D	Ductile Iron - D4512 5000† psi • 34.5 MPa																																																																								
† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.																																																																									
Valve Pattern																																																																									
D02	ISO 4401-02-01 NFPA T3.5.1-D02 See Tech Information																																																																								
Circuit																																																																									
P	Parallel Circuit																																																																								
No. of Stations																																																																									
Aluminum																																																																									
01...10	Available with spacing code 1																																																																								
Ductile Iron																																																																									
01...10	Available with spacing code 1																																																																								
Valve Spacing																																																																									
1	1.50 inch 38.1 mm																																																																								
Port Threads																																																																									
	P & T	A & B	GA																																																																						
P	NPTF • ANSI B1.20.3	0.50	0.38	0.25																																																																					
S	SAE • ISO 11926	-8	-6	-6																																																																					
B	BSPP • ISO 1179	0.50	0.38	none																																																																					
M	ISO • ISO 6149	M18	M14	none																																																																					
T	BSPT • ISO 7	0.50	0.38	none																																																																					
Options																																																																									
See next page for available options and ordering codes.																																																																									

Options - D02 Parallel Manifold


Contact Daman or consult web CADalog for cavity locations if critical.

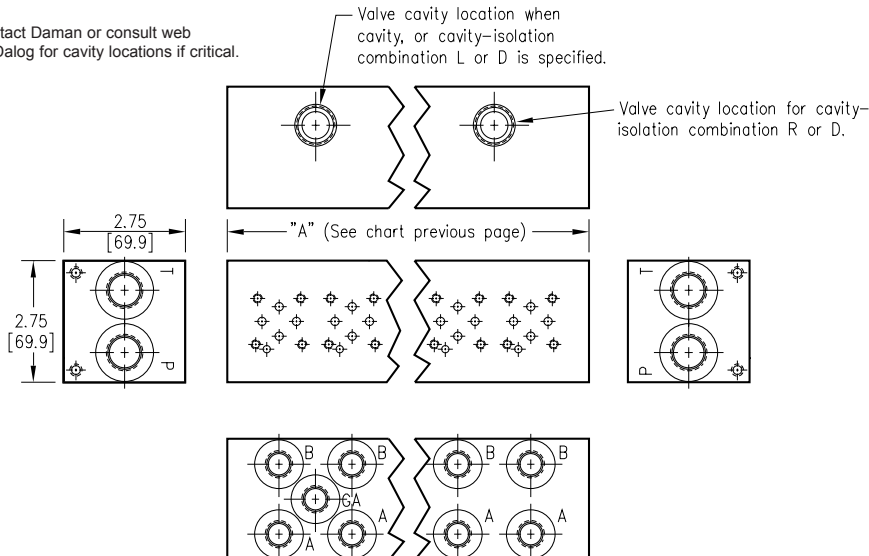

ISOLATIONS		
Daman isolation options allow a manifold to have two independent pressure and/or tank ports. Isolations are drilled rather than plugged to ensure a leakproof and failproof isolation.		
Ordering code letter:	* Isolation is between stations:	Available # of stations:
A	01 & 02	02-10
B	02 & 03	03-10
C	03 & 04	04-10
D	04 & 05	05-10
E	05 & 06	06-10
F	06 & 07	07-10
G	07 & 08	08-10
H	08 & 09	09-10
J	09 & 10	10


* Stations are numbered left to right.

Parallel Circuit with Cavity




Valves with P in the nose and T out the side must be used.

Parallel Circuit with Isolations



Manifold shown with P isolation between 1 & 2 (PA), and T isolation between 2 & 3 (TB).

Cavity & Isolation Combinations




Option code L Cavity left of isolation
Option code R Cavity right of isolation
Option code D includes both cavities


NOTES:

- 1) The GA port is not available on a (1) station manifold.
- 2) The GA port is not available when a pressure isolation is located between stations 1 & 2.
- 3) Some cavity and isolation combinations are not possible. Consult factory to determine availability.

Ordering Information

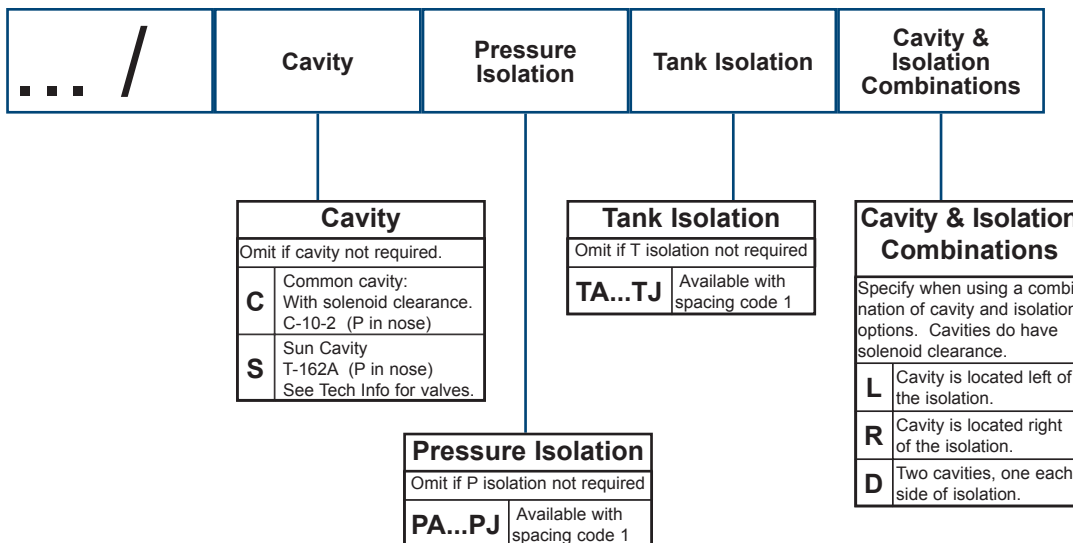

D02 Series Circuit Manifold

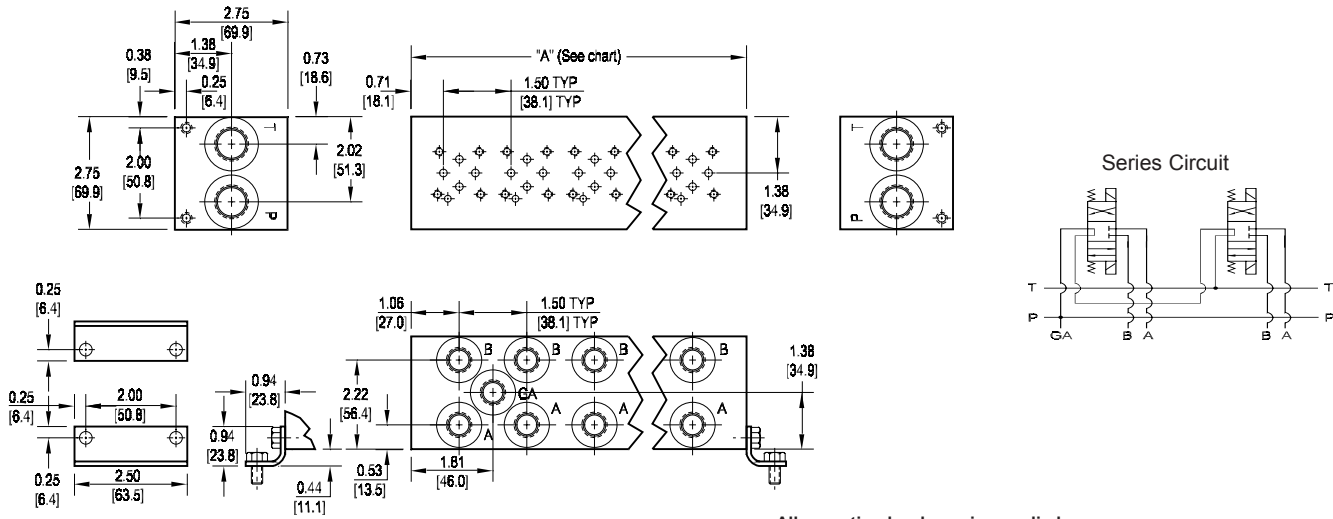

All mounting hardware is supplied.
See page 62 for itemized list.

No. of stations	02	03	04
"A" length inch [mm]	3.63 [92.1]	5.13 [130.2]	6.63 [168.3]
apx. weight alum lb [kg]	5 [2.5]	7 [3]	8 [4]
apx. weight iron lb [kg]	8.5 [4]	12 [6]	16 [7]

Port code	Valve mtg.	Manifold mtg.
P, S	#10-24 UNC x 0.56 [14] DP	0.25-20 UNC x 0.38 [9.7] DP
B, M, T	M5 ISO 6H x 0.56 [14] DP	M6 ISO 6H x 0.38 [9.7] DP

Note: Both Daman's parallel and series D02 manifolds have pressure and tank lines that run the length of the manifold. Consequently it is commonly assumed that an error was made by marking a parallel manifold incorrectly as a series. Upon closer inspection it can be seen that the valve patterns are indeed connected in series.


Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation. Download latest catalog page revisions at www.daman.com.

Ordering Information

Material	Valve Pattern	Circuit	No. of Stations	Valve Spacing	Port Threads	/	Options																																																															
<table border="1"> <thead> <tr> <th colspan="2">Material</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>Aluminum - 6061-T6 3000[†] psi • 20.7 MPa</td> </tr> <tr> <td>D</td> <td>Ductile Iron - D4512 5000[†] psi • 34.5 MPa</td> </tr> <tr> <td colspan="2">[†] Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.</td> </tr> </tbody> </table>	Material		A	Aluminum - 6061-T6 3000 [†] psi • 20.7 MPa	D	Ductile Iron - D4512 5000 [†] psi • 34.5 MPa	[†] Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.		<table border="1"> <thead> <tr> <th colspan="2">Valve Pattern</th> </tr> </thead> <tbody> <tr> <td>D02</td> <td>ISO 4401-02-01 NFPA T3.5.1-D02 See Tech Information</td> </tr> </tbody> </table>	Valve Pattern		D02	ISO 4401-02-01 NFPA T3.5.1-D02 See Tech Information	<table border="1"> <thead> <tr> <th colspan="2">Circuit</th> </tr> </thead> <tbody> <tr> <td>S</td> <td>Series Circuit</td> </tr> </tbody> </table>	Circuit		S	Series Circuit	<table border="1"> <thead> <tr> <th colspan="2">No. of Stations</th> </tr> </thead> <tbody> <tr> <td colspan="2">Aluminum</td> </tr> <tr> <td>02...04</td> <td>Available with spacing code 1</td> </tr> <tr> <td colspan="2">Ductile Iron</td> </tr> <tr> <td>02...04</td> <td>Available with spacing code 1</td> </tr> </tbody> </table>	No. of Stations		Aluminum		02...04	Available with spacing code 1	Ductile Iron		02...04	Available with spacing code 1	<table border="1"> <thead> <tr> <th colspan="2">Valve Spacing</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1.50 inch 38.1 mm</td> </tr> </tbody> </table>	Valve Spacing		1	1.50 inch 38.1 mm	<table border="1"> <thead> <tr> <th colspan="5">Port Threads</th> </tr> </thead> <tbody> <tr> <td>P</td> <td>NPTF • ANSI B1.20.3</td> <td>0.50</td> <td>0.38</td> <td>0.25</td> </tr> <tr> <td>S</td> <td>SAE • ISO 11926</td> <td>-8</td> <td>-6</td> <td>-6</td> </tr> <tr> <td>B</td> <td>BSPP • ISO 1179</td> <td>0.50</td> <td>0.38</td> <td>none</td> </tr> <tr> <td>M</td> <td>ISO • ISO 6149</td> <td>M18</td> <td>M14</td> <td>none</td> </tr> <tr> <td>T</td> <td>BSPT • ISO 7</td> <td>0.50</td> <td>0.38</td> <td>none</td> </tr> </tbody> </table>	Port Threads					P	NPTF • ANSI B1.20.3	0.50	0.38	0.25	S	SAE • ISO 11926	-8	-6	-6	B	BSPP • ISO 1179	0.50	0.38	none	M	ISO • ISO 6149	M18	M14	none	T	BSPT • ISO 7	0.50	0.38	none	<table border="1"> <thead> <tr> <th colspan="2">Options</th> </tr> </thead> <tbody> <tr> <td colspan="2">See next page for available options and ordering codes.</td> </tr> </tbody> </table>	Options		See next page for available options and ordering codes.	
Material																																																																						
A	Aluminum - 6061-T6 3000 [†] psi • 20.7 MPa																																																																					
D	Ductile Iron - D4512 5000 [†] psi • 34.5 MPa																																																																					
[†] Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.																																																																						
Valve Pattern																																																																						
D02	ISO 4401-02-01 NFPA T3.5.1-D02 See Tech Information																																																																					
Circuit																																																																						
S	Series Circuit																																																																					
No. of Stations																																																																						
Aluminum																																																																						
02...04	Available with spacing code 1																																																																					
Ductile Iron																																																																						
02...04	Available with spacing code 1																																																																					
Valve Spacing																																																																						
1	1.50 inch 38.1 mm																																																																					
Port Threads																																																																						
P	NPTF • ANSI B1.20.3	0.50	0.38	0.25																																																																		
S	SAE • ISO 11926	-8	-6	-6																																																																		
B	BSPP • ISO 1179	0.50	0.38	none																																																																		
M	ISO • ISO 6149	M18	M14	none																																																																		
T	BSPT • ISO 7	0.50	0.38	none																																																																		
Options																																																																						
See next page for available options and ordering codes.																																																																						

Options - D02 Series Manifold

Contact Daman or consult web CADalog for cavity locations if critical.

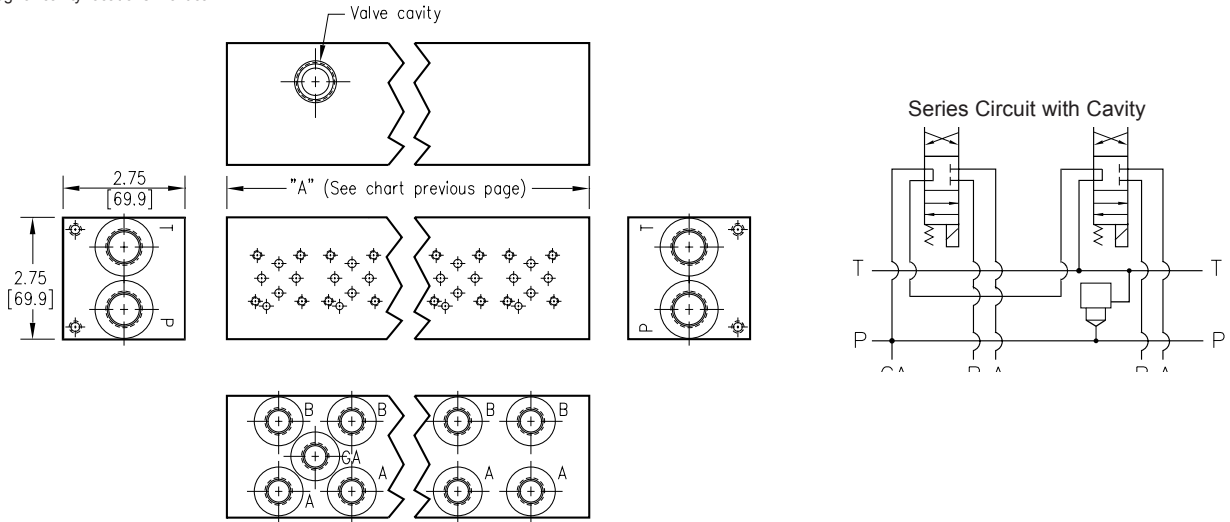

Ordering Information



Cavity	
Omit if cavity not required	
C	Common cavity: With solenoid clearance. C-10-2 (P in nose)
S	Sun Cavity T-162A (P in nose) See Tech Info for valves.