


HYDAC

INTERNATIONAL


**HYDAC
Refrigerated Fluid
Chiller Systems
RFCS**




Your Partner for Expertise in Cooling Systems.

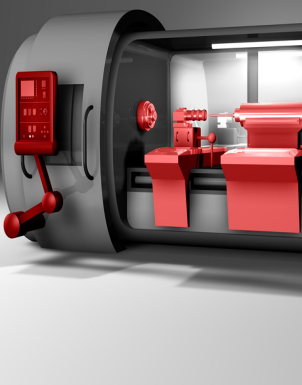


Machine tools




Thermal power plants



Plastic injection moulding machines



Presses



Lathes



Automotive industry

All the requirements...

H.I.B Systemtechnik GmbH is a subsidiary of HYDAC International which employs over 7,500 worldwide.


Located in the Bavarian town of Friedberg, it is the centre of excellence for refrigeration cooling technology. Innovative cooling systems for the machine tool and laser industries are developed and manufactured here. The intelligence demonstrated in our machines originates exclusively within our company.

...for efficient cooling solutions

The RFCS Refrigerated Fluid Chiller System cools various fluids such as water, water/glycol or oil down to, or below, the ambient temperature. The cooling system, which consists of a chiller, pump, tank and electronic control, operates independently and highly accurately to a specific setpoint.


Think green – Act green

The energy efficient, patented mixer principle, combined with a sealless submersible pump, makes this system the ideal component for your machining centre.

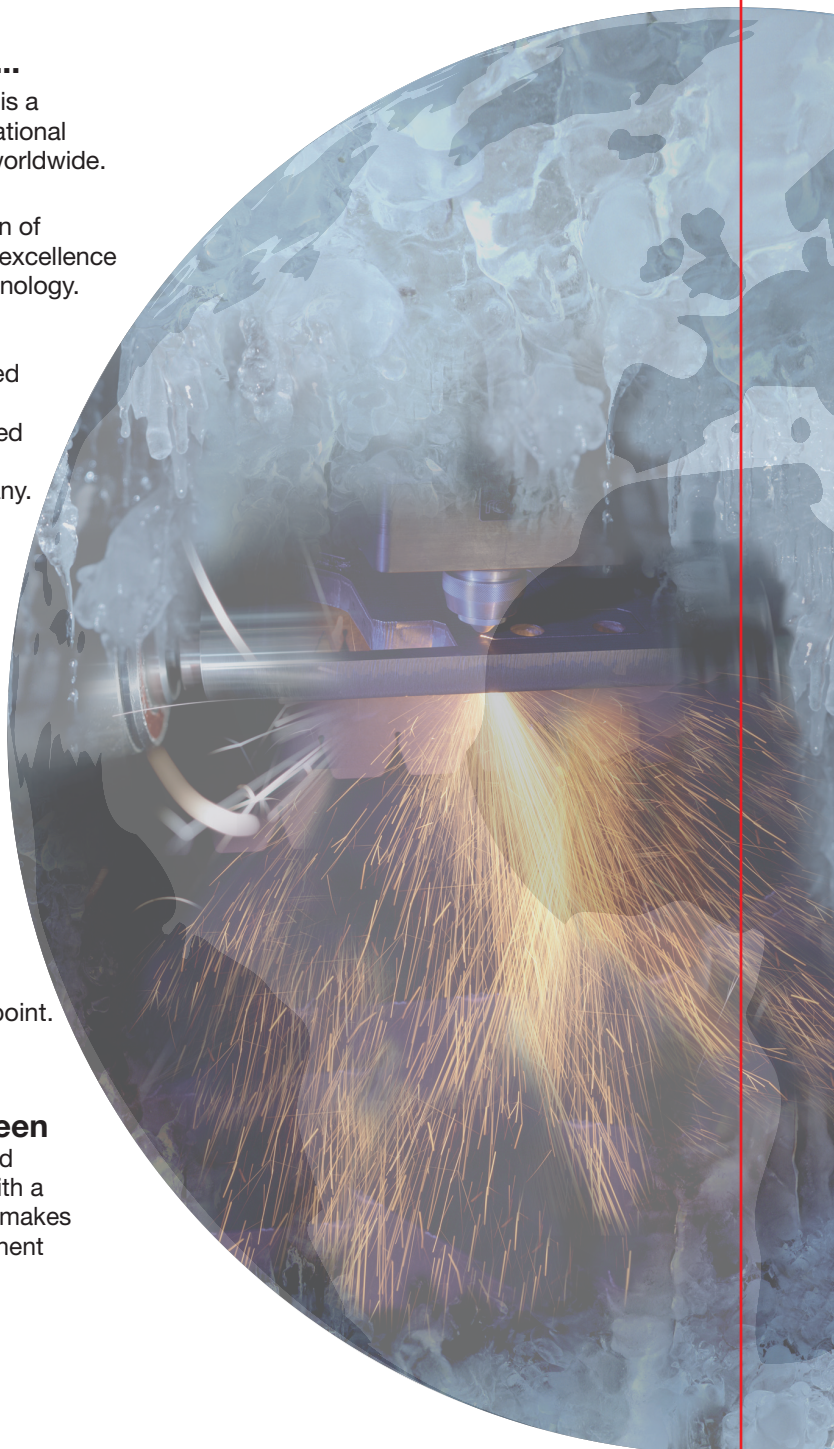

From the prototype to series production.

Planning and advice from our specialists on site. We tailor the solution to your individual requirements.

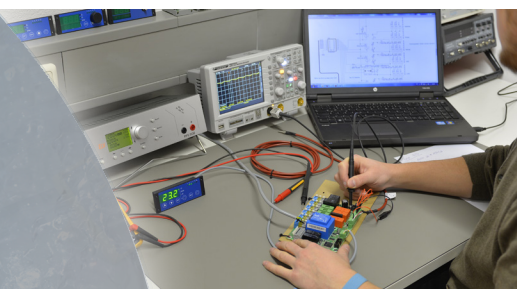

Our own development centre produces market-driven, energy efficient and cutting-edge solutions, to stay one step ahead of the "state of the art".

ISO 9001
CERTIFIED
QUALITY

The coolers are produced in the Bavarian town of Friedberg and rightly deserve the "Made in Germany" seal of quality!



In order to provide a consistently high level of quality, all equipment must undergo a function and performance test.



For Service you can call on a comprehensive network of service engineers. Whether it is for repair at H.I.B or on site. We are at your service worldwide.







RFCS Chiller System

Two ranges – Multiple applications

In the standard versions, these cooling systems are designed as active coolers complete with compressor, air cooled condenser, submersible pump and electronic control.

Whether integrated into a machine or used as a separate auxiliary cooler, the RFCS range of chillers will tackle any cooling task and guarantees quality for your products with utmost precision.



RFCS-G Series



RFCS-D Series




Separate auxiliary cooler for cooling tasks in machine building (integration into the machine tool), capacities up to 7 kW

Separate auxiliary coolers with high capacities up to 160 kW for cooling tasks in the machine tool sector. Several units can be connected in parallel to expand the capacity as required.

Temperature control / Remote maintenance



H.I.B Control unit

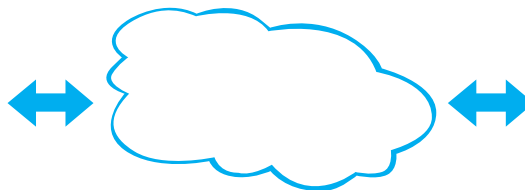

RFCS Chiller System

Technical specifications



Series	Cooling capacity ¹⁾ [kW]	Condenser		Coolant			Pump capacity / flow rate
		air-cooled	water-cooled	DI ²⁾	IW ³⁾	Direct ⁴⁾ (without tank)	
G0	1	•	•	•	•	•	10 l/min @ 1.5 bar
	1.5	•	•	•	•	•	10 l/min @ 1.5 bar
	2.3	•	•	•	•	•	10 l/min @ 1.5 bar
D2	3.3	•	•	•	•	•	15 l/min @ 2 bar
	3.3	•	•	•	•	•	15 l/min @ 2 bar
D3	4.5	•	•	•	•	•	15 l/min @ 2 bar
	5.6	•	•	•	•	•	15 l/min @ 2 bar
D4	7.5	•	•	•	•	•	40 l/min @ 3 bar
G4	7.5	•	•	•	•	•	40 l/min @ 3 bar
	9.5	•	•	•	•	•	40 l/min @ 3 bar
G5	12	•	•	•	•	•	40 l/min @ 3 bar
	15	•	•	•	•	•	40 l/min @ 3 bar
G6	20	•	•	•	•	•	40 l/min @ 3 bar
	26	•	•	•	•	•	40 l/min @ 3 bar
	32	•	•	•	•	•	40 l/min @ 3 bar
G7	40	•	•	•	•	•	90 l/min @ 3 bar
	50	•	•	•	•	•	90 l/min @ 3 bar
	60	•	•	•	•	•	90 l/min @ 3 bar
	70	6)	•	•	•	•	150 l/min @ 3 bar
	90	6)	•	•	•	•	150 l/min @ 3 bar
	100	6)	•	•	•	•	150 l/min @ 3 bar
	135	6)	•	•	•	•	250 l/min @ 3 bar
155	6)	•	•	•	•	250 l/min @ 3 bar	

1) Cooling capacity based on 35°C ambient air / water to condenser and 20°C process fluid supply temperature
 2) DI = deionised water
 3) IW = industrial water

4) Direct = direct evaporation without refrigerant
 5) Standard, other voltages on request
 6) Available as an air-cooled version with separate condenser or air blast heat exchanger



G4

G5

G6

G7

Electrical supply ¹⁾	Dimensions LxDxH [mm]	Weight [kg]
230V - 50/60Hz	443 x 524 x 443	43
230V - 50/60Hz	443 x 524 x 443	45
230V - 50/60Hz	443 x 524 x 443	48
230V - 50/60Hz	480 x 420 x 800	80
400/440V - 50/60Hz	480 x 420 x 800	80
400/440V - 50/60Hz	595 x 555 x 1131	130
400/440V - 50/60Hz	595 x 555 x 1131	130
400/440V - 50/60Hz	601 x 601 x 1361	160
400/440V - 50/60Hz	601 x 601 x 1527	200
400/440V - 50/60Hz	601 x 601 x 1527	250
400/440V - 50/60Hz	601 x 601 x 2131	300
400/440V - 50/60Hz	601 x 601 x 2131	300
400/440V - 50/60Hz	1230 x 610 x 2131	350
400/440V - 50/60Hz	1230 x 610 x 2131	380
400/440V - 50/60Hz	1230 x 610 x 2131	400
400/440V - 50/60Hz	1860 x 1000 x 2134	1000
400/440V - 50/60Hz	1860 x 1000 x 2134	1000
400/440V - 50/60Hz	1860 x 1000 x 2134	1000
400/440V - 50/60Hz	1860 x 1000 x 2021	750
400/440V - 50/60Hz	1860 x 1000 x 2021	770
400/440V - 50/60Hz	1860 x 1000 x 2021	780
400/440V - 50/60Hz	1860 x 1000 x 2021	800
400/440V - 50/60Hz	1860 x 1000 x 2021	900

Accessories*

- Higher capacity pumps available
- Several parallel circuits
- Ambient temperature dependent control using separate temperature sensor
- Serial interface for system monitoring
- Filtration units for the refrigerant circuit
- Flow rate display and monitoring
- Extremely accurate control up to ± 0.1 K, standard ± 1.5 K
- Speed controlled fans


*available for almost all units



Centralized cooling systems



Chiller with air blast heat exchanger and HY-ECOBX

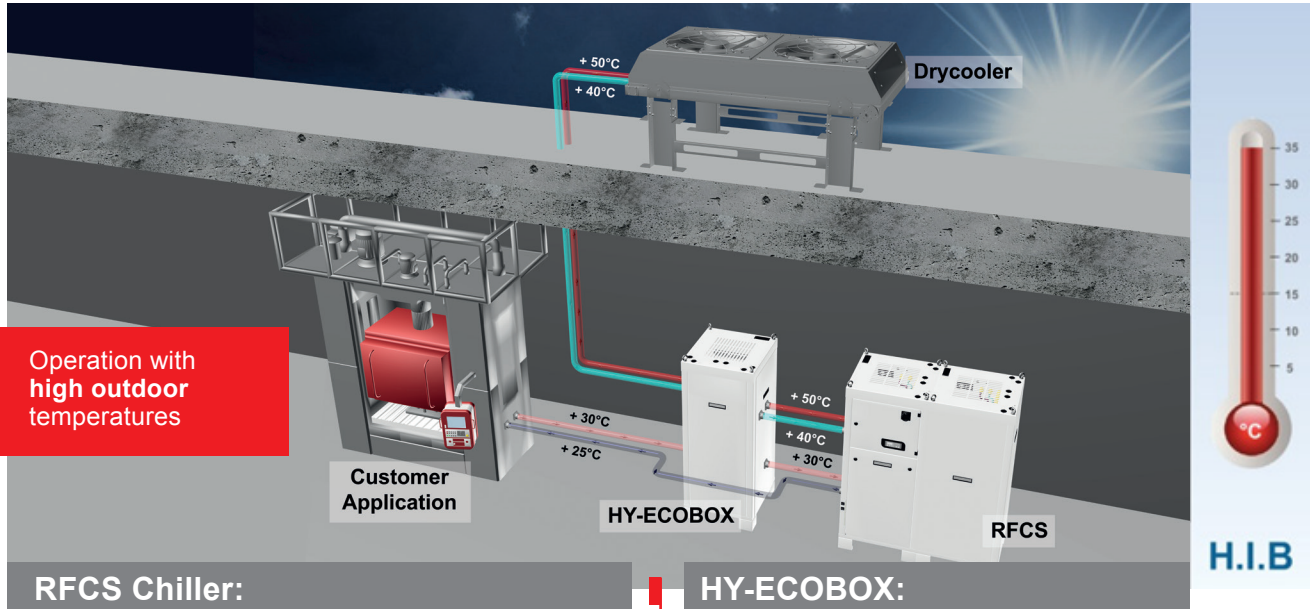


Operation with **high outdoor** temperatures

RFCS Chiller:

The RFCS produce cold water in different classes independent from local ambient temperatures for cooling customized applications. In this case, the chiller is designed with a water cooled condenser that dissipates its process heat to a separate cooling water circuit.

HY-ECOBX:

The HY-ECOBX is an optional module which contributes to improve energy saving. Whenever there is a correspondingly low ambient temperature, the active cooling operation of the refrigerating circuit is switched off. Accordingly the system will work in a passive mode. The use of the HY-ECOBX as energy manager is therefore only possible in combination with a drycooler.

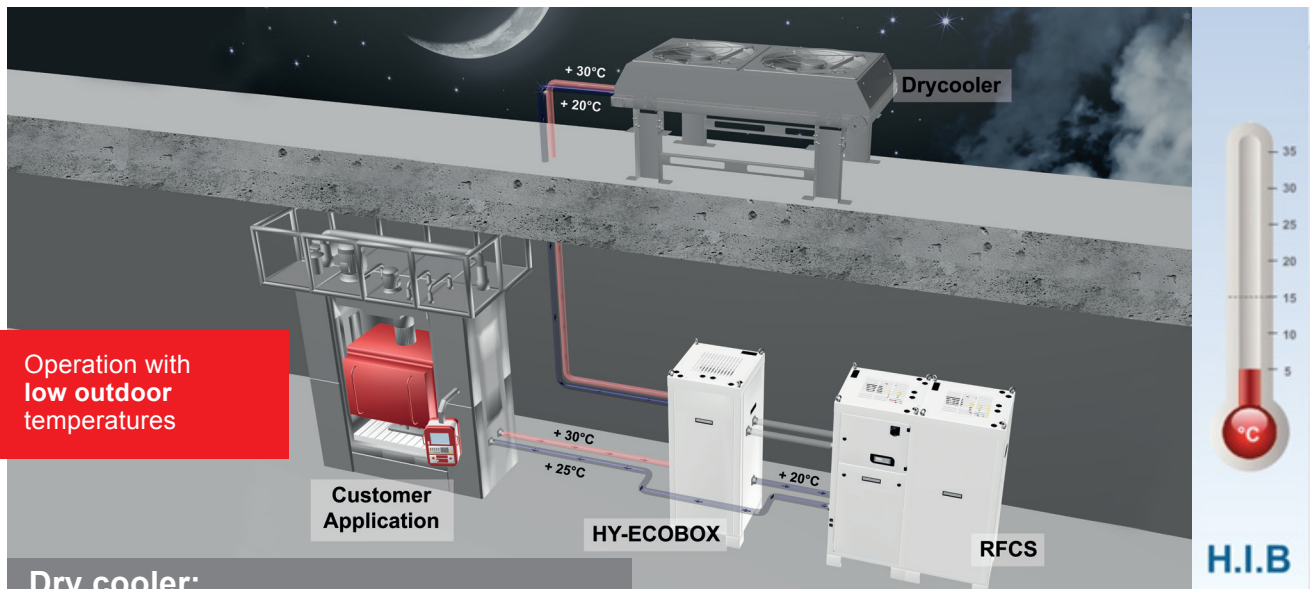

Operation with **low outdoor** temperatures

Dry cooler:

Water cooled RFCS chillers require a cooled water supply for heat removal. A drycooler is used as an efficient resource of achieving an external water supply.


Advantages

- Saves resources, no water consumption
- High energy-saving potential using the HY-ECOBX
- No heat transfer through the RFCS into the building or water supply

Global Presence. Local Expertise. www.hydac.com



Accumulators E 30.000



Fluid Filters E 70.000



Process Technology E 77.000



Filter Systems E 79.000



Compact Hydraulics DEF 53.000



Accessories E 61.000






Electronics E 180.000



Cooling Systems DEF 5.700



-  HYDAC Head Office
-  HYDAC Companies
-  HYDAC Sales and Service Partners

H.I.B. HYDAC INTERNATIONAL

H.I.B Systemtechnik GmbH
 Winterbrückenweg 30
D-86316 Friedberg-Derching
 Tel.: +49 (0) 821/747 71-400
 Fax: +49 (0) 821/747 71-410
 Internet: www.h-i-b.de
 E-Mail: vertrieb@h-i-b.de

HYDAC COOLING GMBH
 Industriegebiet
D-66280 Sulzbach / Saar
 Tel.: +49 (0) 6897/509-01
 Fax: +49 (0) 6897/509-454
 Internet: www.hydac.com
 E-Mail: cooling@hydac.com