


Heavy Duty Releasable Cable Ties

The RT150 and RT250 heavy duty releasable cable ties feature an extended pawl which allows for simple and quick release of the ties.

RT150 Heavy Duty Releasable Cable Ties




| Material Data | |
|-----------------------|--|
| Material | Polyamide 6.6 (PA66) |
| Operating Temperature | -40 °F to +185 °F (-40 °C to +85 °C) continuous |
| Flammability | UL94 V2 |



| Product Selection | | | Min. Tensile Strength | Length (L) | Max. Ø Bundle | Width (W) | Color | Pkg. Qty. |
|-------------------|--------------------|----------|-----------------------|--------------|---------------|-------------|-------|-----------|
| Article No. | Part No. | Type | | | | | | |
| 115-00036 | RT150REP0X2 | RT150REP | 175 lbs (780) | 15.35" (390) | 4" (105) | .346" (8.8) | Black | 25 |
| 115-00037 | RT150MEP0X2 | RT150MEP | 175 lbs (780) | 21.06" (535) | 5.90" (150) | .346" (8.8) | Black | 25 |
| 115-00038 | RT150LEP0X2 | RT150LEP | 175 lbs (780) | 32.28" (820) | 9.65" (245) | .346" (8.8) | Black | 25 |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.

RT250 Heavy Duty Releasable Cable Ties



| Material Data | |
|-----------------------|--|
| Material | Polyamide 6.6 (PA66) |
| Operating Temperature | -40 °F to +185 °F (-40 °C to +85 °C) continuous |
| Flammability | UL94 V2 |



| Product Selection | | | Min. Tensile Strength | Length (L) | Max. Ø Bundle | Width (W) | Color | Pkg. Qty. |
|-------------------|-------------------|---------|-----------------------|--------------|---------------|-------------|---------|-----------|
| Article No. | Part No. | Type | | | | | | |
| RT250S | | | | | | | | |
| 131-75819 | RT250S9X2 | RT250S | 250 lbs (1115) | 9.05" (230) | 2.17" (55) | .49" (12.5) | Natural | 25 |
| 115-41800 | RT250S0X2 | RT250S | 250 lbs (1115) | 9.05" (230) | 2.17" (55) | .49" (12.5) | Black | 25 |
| RT250R | | | | | | | | |
| 131-75019 | RT250R9X2 | RT250R | 250 lbs (1115) | 20.47" (520) | 5.71" (145) | .49" (12.5) | Natural | 25 |
| 115-41300 | RT250R0X2 | RT250R | 250 lbs (1115) | 20.47" (520) | 5.71" (145) | .49" (12.5) | Black | 25 |
| RT250M | | | | | | | | |
| 131-75619 | RT250M9X2 | RT250M | 250 lbs (1115) | 22.24" (565) | 5.90" (150) | .49" (12.5) | Natural | 25 |
| 131-75610 | RT250M0X2 | RT250M | 250 lbs (1115) | 22.24" (565) | 5.90" (150) | .49" (12.5) | Black | 25 |
| RT250I | | | | | | | | |
| 131-75219 | RT250I9X2 | RT250I | 250 lbs (1115) | 28.54" (725) | 8.00" (203) | .49" (12.5) | Natural | 25 |
| 115-41401 | RT250I0X2 | RT250I | 250 lbs (1115) | 28.54" (725) | 8.00" (203) | .49" (12.5) | Black | 25 |
| RT250L | | | | | | | | |
| 131-75419 | RT250L9X2 | RT250L | 250 lbs (1115) | 34.65" (880) | 10.00" (254) | .49" (12.5) | Natural | 25 |
| 115-41500 | RT250L0X2 | RT250L | 250 lbs (1115) | 34.65" (880) | 10.00" (254) | .49" (12.5) | Black | 25 |
| RT250XL | | | | | | | | |
| 131-75519 | RT250XL9X2 | RT250XL | 250 lbs (1115) | 40" (1016.0) | 12" (304.8) | .49" (12.5) | Natural | 25 |
| 131-75510 | RT250XL0X2 | RT250XL | 250 lbs (1115) | 40" (1016.0) | 12" (304.8) | .49" (12.5) | Black | 25 |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.


Speedy Tie

An entirely new design in cable management, the Speedy Tie is a fully re-usable, easily releasable lashing tie. The Speedy Tie's unique design allows it to be released with one hand.

- Just one click to tie and untie
- Fully re-usable
- Once applied, the tail can be neatly tucked away for added safety
- Highly visible yellow color — also available in black, impact modified material
- Versatile design allows use for multiple applications


The Speedy Tie is a versatile tool for countless applications, including:

- In plant transfer of products
- Temporary and secure bundling
- Packaging

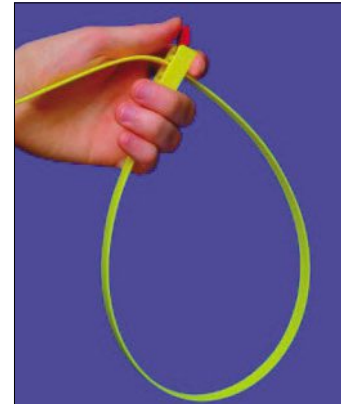

Speedy Tie - Quick and easy.

| Material Data | |
|-----------------------|--|
| Material | Polyamide 6.6 (PA66) |
| Color | Yellow , Red |
| Operating Temperature | -40 °F to +185 °F (-40 °C to +85 °C) continuous |
| Flammability | UL94 V2 |

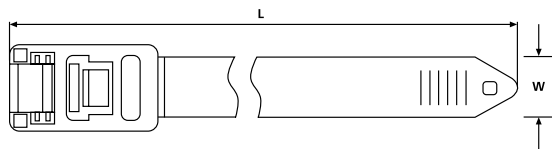

Packaging Configurations

Distributor Packs

- Printed bag with a hang hole
- 60 SpeedyTies - 12 bags of 5

OEM Packs

- Plain bag (no hang hole)
- Standard box
- 300 SpeedyTies - 12 bags of 25

| Product Selection | | | | Min. Tensile Strength | Length (L) | Max. Ø Bundle | Width (W) | Pkg. Qty. | Carton Qty. |
|-------------------|-----------------------|----------|--|-----------------------|--------------|---------------|-----------|-----------|-------------|
| Article No. | Part No. | Type | Description | | | | | | |
| 115-00001 | RTT750HR.NX900 | RTT750HR | Distributor Pack - order in carton qty. only | 200 lbs (888) | 29.52" (750) | 8.27" (210) | .51" (13) | 5 | 60 |
| 115-00000 | RTT750HR.NX1P | RTT750HR | OEM Pack - order in carton qty. only | 200 lbs (888) | 29.52" (750) | 8.27" (210) | .51" (13) | 25 | 300 |

Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.