



Panel Mounted Pneumatic Counter

50670

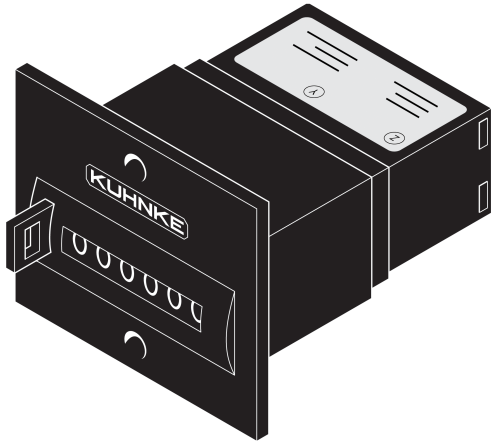

The pneumatic counter can be used as an event, part or lot counter. The counter registers pneumatic impulses on a 6 digit display. Totalizer operates with impulse pressure between 30 and 115 PSI. The counter can be reset either manually via a reset button, or by a pneumatic signal to a specially provided port.



Technical Specifications

Op. Pressure:

30-115 PSI

Connections:

10-32 (M5) ports

Display:

Black with white digits (6 numbers)

Reset:

Manual button on cover or pneumatic signal of 180 ms duration.

Media:

Filtered air

Control Connections:

Port Z - Counter pulse input

Port Y - Reset

Duty Cycle:

Continuous

Min. pulse duration 8 ms

Min. pause 10 ms

Operating Ambient:

0°C to + 60°C (32°F to 140°F)

Weight:

2.5 ozs.

Materials:

Molded body

Dimensions:

Face plate: 2" W x 2" H

Behind panel: 2 1/2" Deep x

2" Wide x 1" High

Panel Cut Out:

2" Wide x 11/16" High

2 mounting holes required.

Hardware included