


Regulators

Series 50 Manifold Regulator

Kuhnke System Logic Devices

Manifold Mounted Miniature Pressure Regulator

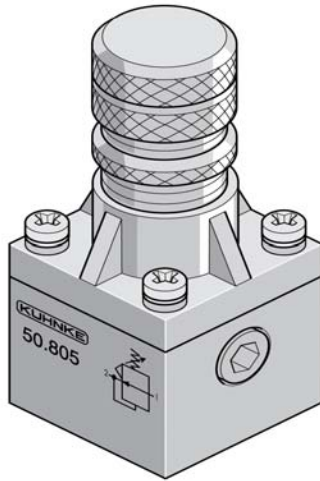

The manifold mounted regulator provides regulation of air pressures from 0 to 145 PSI. The miniature regulator is available in both relieving and non-relieving versions in a nickel-plated brass housing. The unit is provided with a third port for connection of a pressure gauge.

A large brass knob provides for adjustment throughout the regulator's range. A setting lock nut is included to prevent tampering after adjustment. Two adjustment ranges are available as standard, for close regulation in most applications. Special designs are available.



Technical Specifications

Op. Pressure:

0-145 PSI

Regulator Range:

0-115 PSI

Porting:

Manifold mounted.

Flow Rate:

Dependent on regulator model.
See charts.

Media:

Filtered air.

Types:

Relieving or non-relieving.
Single stage, diaphragm/
spring construction.

Response Time:

(Dependent on secondary volume).
Response average: 45ms at 20%
loss of secondary air pressure;
100ms at 50% loss of secondary
air pressure.

Adjustment:

Knob Adj. Equipped with locking nut
to prevent tampering after setting is
made.

Materials:

Brass housing nickel-plated,
stainless and brass interior parts,
Buna N seals.

Operating Ambient:

0° C to +60° C (32° F to 140° F)

Dimensions:

Height – 2 5/16"
Width – 1 3/16" Square
Weight – 9 1/2 ozs.



Drilling Plan:

See drawing.

Selection Chart

Secondary Pressure Regulation Range	Catalog Number	
	Relieving Type	Non- Relieving Type
0 - 115 PSI (8 Bar)	50805-00-80-00	50805-00-80-10
0 - 15 PSI (1 Bar)	50805-00-10-00	50805-00-10-10


Diagrams




Operation

Relieving type regulators allow excessive pressure on the secondary side of the regulator to bleed off to the atmosphere, helping maintain steady pressure. Non-relieving types are used where pressure build up is not a concern as in air motors, or air gun applications etc.

Flow Chart

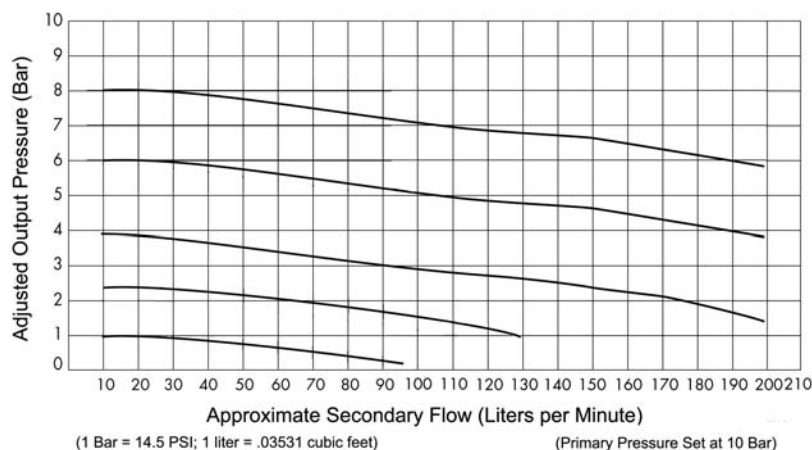

Drilling Plan




Regulators

Series 50 Manifold Regulator

Kuhnke System Logic Devices

Manifold Mounted Miniature Pressure Regulator

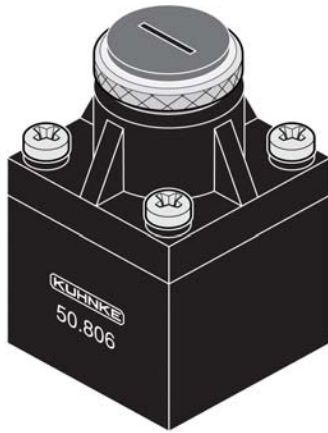

The manifold mounted regulator was designed for use on custom manifolds. The miniature regulator is available in both relieving and non-relieving versions in a molded housing.

The unit is screw driver adjustable and is equipped with a locking ring to prevent tampering after the setting is made.

Several adjustment ranges are available for close regulation in most applications. Special designs are available.



Technical Specifications

Op. Pressure:

0-145 PSI

Regulator Range:

0-75 PSI

Porting:

Manifold mounted.

Flow Rate:

Dependent on regulator model.
See charts.

Media:

Filtered air.

Types:

Relieving or non-relieving.
Single stage, diaphragm/
spring construction.

Response Time:

(Dependent on secondary volume).
Response average: 45ms at 20%
loss of secondary air pressure;
100ms at 50% loss of secondary
air pressure.

Adjustment:

Screw driver Adj. Equipped with
locking nut to prevent tampering
after setting is
made.

Materials:

Molded POM housing,
stainless and brass interior parts,
Buna N seals.

Operating Ambient:

0° C to +60° C (32° F to 140° F)

Dimensions:

Height – 1 9/16"
Width – 1 3/16" Square
Weight - 2 ozs.



Drilling Plan:

See drawing.

Selection Chart

Secondary Pressure Regulation Range	Catalog Number	
	Relieving Type	Non- Relieving Type
0 - 75 PSI (5 Bar)	50806-00-50-00	50806-00-50-10
0 - 35 PSI (2.5 Bar)	50806-00-25-00	50806-00-25-10


Diagrams



Operation

Relieving type regulators allow excessive pressure on the secondary side of the regulator to bleed off to the atmosphere, helping maintain steady pressure. Non-relieving types are used where pressure build up is not a concern as in air motors, or air gun applications etc.

Flow Chart

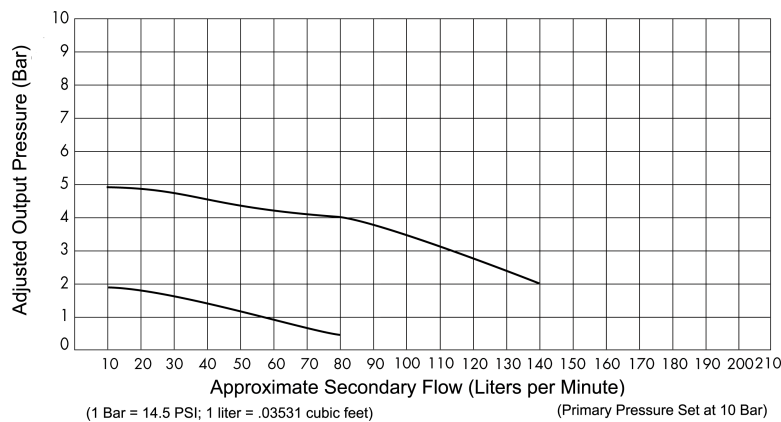

Drilling Plan

