

M8 DISTRIBUTION SYSTEMS

For sensors and actuators

– Base modules

– inline face or side mounting

Exact8

4-way




Exact8

6-way



Exact8

8-way



Exact8

10-way




Approvals:

1 Form	84000	86000	88000	80000
Type	PNP, 3-pole	PNP, 3-pole	PNP, 3-pole	PNP, 3-pole
Contact layout	<p>M8-Females 3-pole</p> <p>for 1 signal per port</p>			
Technical Data				
Operating voltage	24 V DC			
Operating current per contact	max. 2 A			
Total current	max. 8 A			
Protection	IP65, IP67			
Temperature range	-20...+70 °C, depending on cable quality			
Contact Layout				
Contact 1	(+)			
Contact 3	(-)			
Contact 4	(NO)/(S1)			
LED display	LED (green): power / LED (yellow): (S1)			
Article No.				
The composition of your article number is explained on page 3.1.i	<u>8</u> <u>0</u> <u>0</u> <u>0</u>	-	<u>0</u> <u>0</u> <u>0</u>	<u>0</u> <u>0</u> <u>0</u> <u>0</u>
	1 Form			
Notes				

M8 DISTRIBUTION SYSTEMS

For sensors and actuators

- Base modules
- inline face or side mounting

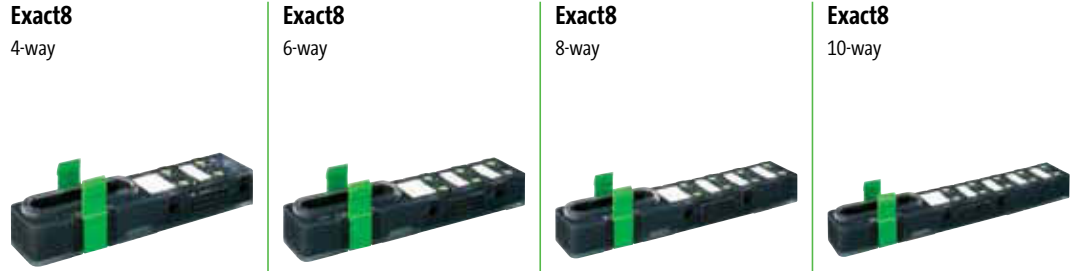

1 Form	84001	86001	88001	80001
Type	NPN, 3-pole	NPN, 3-pole	NPN, 3-pole	NPN, 3-pole
Contact layout	<p>M8-Females 3-pole</p> <p>4 (N/O)</p> <p>3 (-) 1 (+)</p> <p>for 1 signal per port</p>			
Technical Data				
Operating voltage	24 V DC			
Operating current per contact	max. 2 A			
Total current	max. 8 A			
Protection	IP65, IP67			
Temperature range	-20...+70 °C, depending on cable quality			
Contact Layout				
Contact 1	(+)			
Contact 3	(-)			
Contact 4	(NO)/(S1)			
LED display	LED (green): power / LED (yellow): (S1)			
Article No.				
The composition of your article number is explained on page 3.1.i	<u>8</u> <u>0</u> <u>0</u> <u>0</u>	-	<u>0</u> <u>0</u> <u>0</u>	<u>0</u> <u>0</u> <u>0</u> <u>0</u>
	1 Form			
Notes				