


Features

- Utilizes bellows mechanism to sense temperature
- High-quality snap-action switch
- Factory preset
- Shock and vibration resistant
- Available in a wide range of configurations
- NEMA 4, 13

Operating Specifications

Set Point Range	40° — 300°F	(4° — 149°C)
Set Point Tolerance	±5°F	(2.8°C)
Maximum Operating Temperature	100°F above set point (325°F max)	
Differential	8 — 16°F	
Current Rating	10 A @ 125/250 VAC	5 A @ 30 VDC
Media Connection	See Order Chart Below for Options	
Circuit Form	SPST-NO, SPST-NC or SPDT	
Electrical Connection	See Order Chart Below for Options	
Maximum External Pressure	500 PSI	

How to Order (Example: Part Number: HT - 2A - 100R / WL)

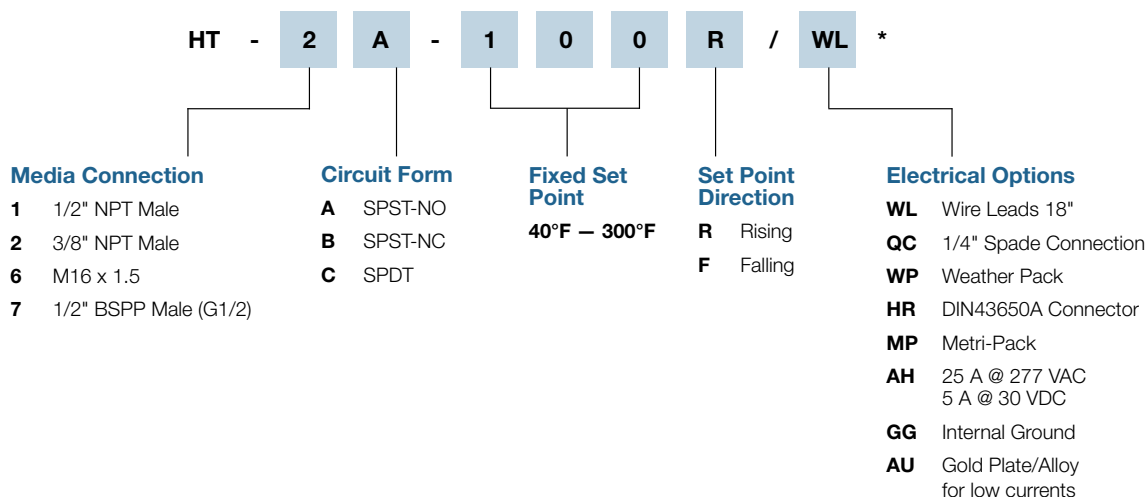

* Defaults to Screw Terminals