


Features

- Utilizes snap disc approach to sense temperature
- High-quality snap-action switch
- Factory preset
- Shock and vibration resistant
- Available in a wide range of configurations
- Economical
- NEMA 4, 13

Operating Specifications

| | | |
|--------------------------------------|-----------------------------------|--------------------------|
| Set Point Range | 150° – 300°F | (65° – 149°C) |
| Set Point Tolerance | ±5°F | (2.8°C) |
| Maximum Operating Temperature | 325°F | (163°C) |
| Differential | 8 – 16°F | |
| Current Rating | 5 A @ 250 VAC | 5 A @ 30 VDC (Resistive) |
| Media Connection | See Order Chart Below for Options | |
| Circuit Form | SPST-NO, SPST-NC or SPDT | |
| Electrical Connection | See Order Chart Below for Options | |
| Maximum External Pressure | 2500 PSI | |

How to Order (Example: Part Number: **TD - 1C - 175R / WP** *)

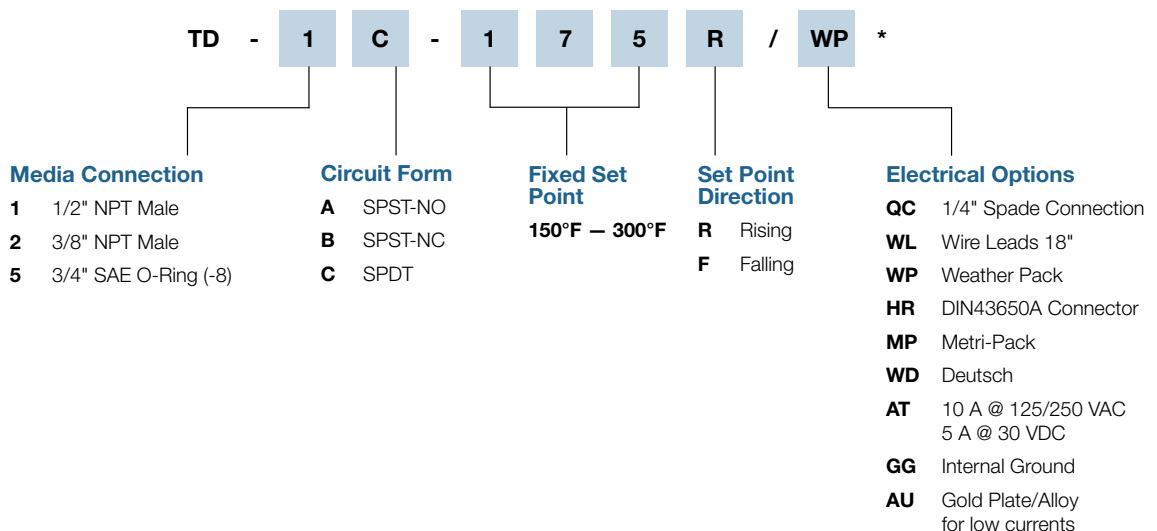

* Defaults to Screw Terminals