

UL US CE


Features

- Bi-metal immersion temperature switch
- Factory preset temperature
- Direct action contacts/minimum hysteresis
- Gold diffused, fine silver contacts
- Available in a wide range of configurations
- Economical and compact
- NEMA 4, 13

Operating Specifications

Set Point Range	40° — 300°F	(4° — 149°C)
Set Point Tolerance	±5°F	(2.8°C)
Maximum Temperature	325°F	(163°C)
Current Rating	3 A @ 240 VAC	2 A @ 24 VDC (Resistive)
Probe Length	1"	
Media Connection	See Order Chart Below for Options	
Circuit Form	SPST-NO or SPST-NC	
Electrical Connection	See Order Chart Below for Options	
Maximum External Pressure	5000 PSI	

How to Order (Example: Part Number: **TT - D3A - 100R / WL** *)

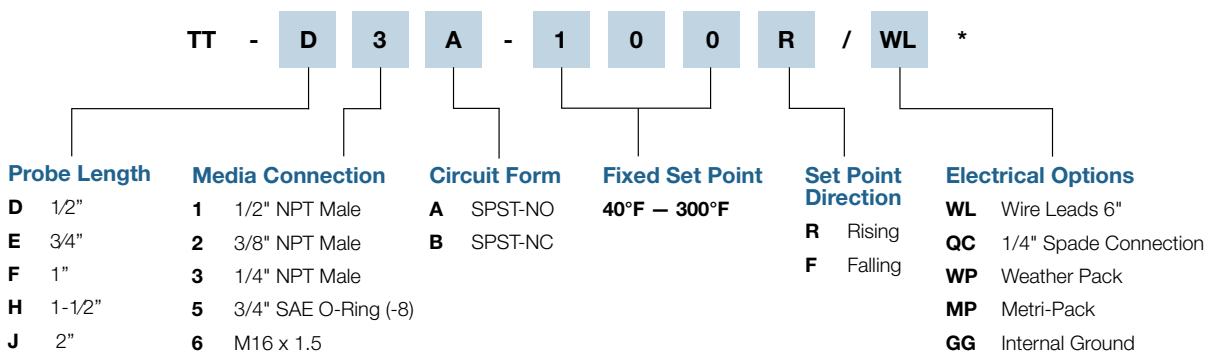

* Defaults to Screw Terminals

For more media connections, see page 31.
For more electrical connections, see page 7.