



14E Filter / Regulator – Miniature



Features

- Excellent water removal efficiency.
- Unbalanced poppet standard.
- Solid control piston for extended life.
- Space saving package offers both filter and regulator features in one integral unit.
- Non-rising adjustment knob.
- Two full flow 1/8" gauge ports.
- High Flow: 1/8" – 16 SCFM§
 1/4" – 18 SCFM§

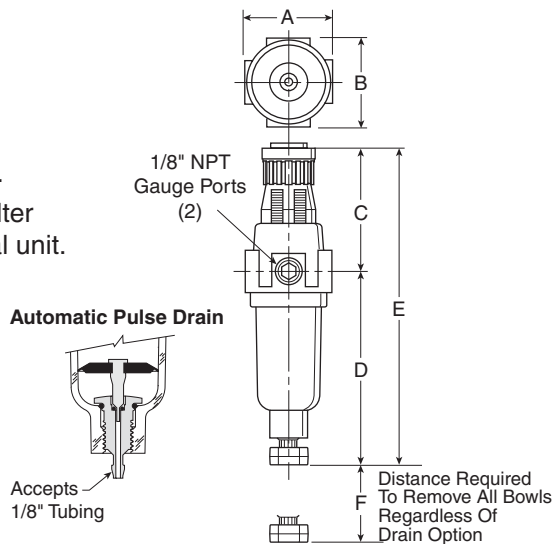

Port Size	NPT	
	Twist Drain	Automatic Pulse Drain
Poly Bowl†		
1/8"	14E01B13F*	14E05B13F*
1/4"	14E11B13F*	14E15B13F*
Metal Bowl		
1/8"	14E03B13F*	14E07B13F*
1/4"	14E13B13F*	14E17B13F*

A	B	C
1.62 (41)	1.58 (40)	2.42 (61)
D	D†	E
3.79 (96)	3.64 (92)	6.21 (158)
E†	F	
6.06 (154)	1.60 (41)	

Standard part numbers shown bold. For other models refer to ordering information below.


‡ For polycarbonate bowl see Caution on page C2.

§ SCFM = Standard cubic feet per minute at 100 psig inlet, 90 psig no flow secondary setting and 10 psig pressure drop.

NOTE: 1.218 Dia. (31mm) hole required for panel mounting.

Inches (mm)
 † With Auto Drain

Ordering Information



BOLD ITEMS ARE MOST POPULAR.

Port Size
0 1/8 Inch
1 1/4 Inch

Elements
A 40 Micron
B 5 Micron
Z Adsorber

Relief
F Relieving
G Non-Relieving
H* Low Temp Relieving

* Twist Drain Only.

Port Type	
Blank	NPT
1	BSPP
2	BSPT

Preset / Pressure Limited	
Blank	None
XXX*	Preset Pressure
XXX*	Pressure Limited

Bowl Options	
Polycarbonate Bowl	
1	Twist Drain
5	Automatic Pulse Drain
Metal Bowl	
3	Twist Drain
7	Automatic Pulse Drain

Pressure Range		
	Without Gauge	With Gauge*
10	30 psig	15 30 psig
11	60 psig	16 60 psig
12	15 psig	17 15 psig
13	125 psig	18 125 psig

* Not available with BSPP or BSPT port types.

Engineering Level
* Will be Entered at Factory

Options	
Blank	No Options
L†	Preset Non-Adjustable
P†	Preset Adjustable
S†	Pressure Limiter Max. Adjustable
T†	Pressure Limiter Max.

* Available Preset / Pressure Limited Range, 10 to 90 psig in 5 psig increments. For higher pressures, contact factory.
 (Example: 065 = 65 psig)



Spring Type by Preset / Limited Pressure:

- For Preset / Limited Pressure 10 to 25 use 30 PSI Spring
- For Preset / Limited Pressure 26 to 50 use 60 PSI Spring
- For Preset / Limited Pressure 51 to 90 use 125 PSI Spring

† Inlet Pressure is 100 psig. For other pressures, contact factory.



Technical Information

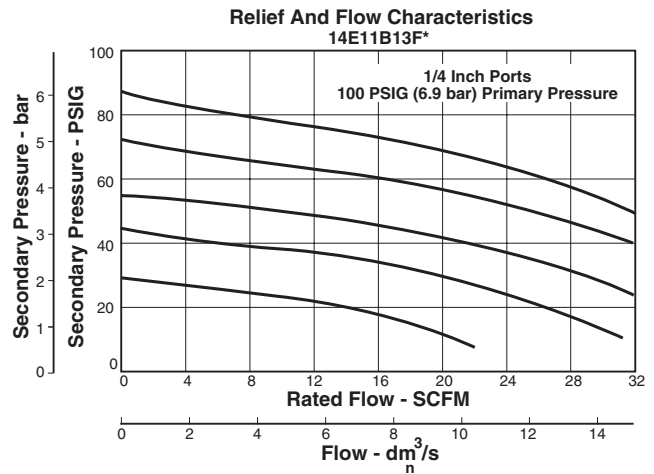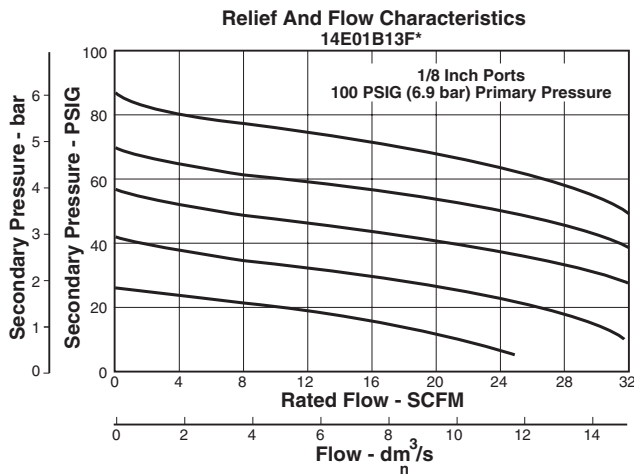

CAUTION:

REGULATOR PRESSURE ADJUSTMENT – The working range of knob adjustment is designed to permit outlet pressures within their full range. Pressure adjustment beyond this range is also possible because the knob is not a limiting device. This is a common characteristic of most industrial regulators, and limiting devices may be obtained only by special design.

For best performance, regulated pressure should always be set by increasing the pressure up to the desired setting.

⚠ WARNING

**Product rupture can cause serious injury.
 Do not connect regulator to bottled gas.
 Do not exceed maximum primary pressure rating.**

14E Filter / Regulator Kits & Accessories

- Bonnet Tamperproof Kit**..... P01265
- Bowl Kits –**
- Poly Bowl – Automatic Drain PS408BP
- Twist Drain PS404P
- Metal Bowl – Automatic Drain PS451BP
- Twist Drain PS447BP
- Filter Element Kits – 40 Micron** PS401P
- 5 Micron PS403P
- Adsorber..... PS452P
- Gauges – 30 psig (0 to 2.1 bar)** K4515N18030
- 60 psig (0 to 4.1 bar) K4515N18060
- 160 psig (0 to 11.0 bar) K4515N18160
- Mounting Bracket Kit*** (Includes Panel Mount Nut)..... PS417BP
- Panel Mount Nut*** P78652
- Poppet / Piston Kits – Unbalanced, Non-Relieving**..... PS428P
- Unbalanced, Relieving..... PS426P
- Springs – 1- 15 psig Range (Yellow)**..... P01176
- 1- 30 psig Range (Black) P01175
- 1- 60 psig Range (White)..... P01174
- 2- 125 psig Range (Gold) P01173

Specifications

- Automatic Pulse Drain Tube Barb** 1/8 Inch
- Bowl Capacity** 1 Ounce
- Gauge Ports (2)** (Can be used for Full Flow)..... 1/8 Inch
- Port Threads** 1/8, 1/4 Inch

*Tighten panel mount nut 2.8 to 3.4 Nm (25 to 30 in-lbs) of torque.

Pressure & Temperature Ratings –

- Polycarbonate Bowl
0 to 150 psig (0 to 10.3 bar), 32°F to 125°F (0°C to 52°C)
- Metal Bowl
0 to 250 psig (0 to 17.2 bar), 32°F to 175°F (0°C to 80°C)

Secondary Pressure Ranges –

- Standard Pressure 2 to 125 psig (0 to 8.6 bar)
- Medium Pressure 1 to 30 psig (0 to 2.1 bar)
- Medium Pressure 1 to 60 psig (0 to 4.1 bar)
- Low Pressure..... 1 to 15 psig (0 to 1 bar)

Weight 0.4 lb. (0.18 kg)

Materials of Construction

- Adjusting Nut** Brass
- Adjusting Stem & Spring** Steel
- Body**..... Zinc
- Bonnet, Knob, Seat, Piston, Holder & Deflector** Plastic
- Bowls Available – Transparent** Polycarbonate
- Metal (Without Sight Gauge) Zinc
- Drains – Manual – Twist Type**
- Body & Stem Plastic
- Seals Nitrile
- Automatic – Pulse Type
- Piston & Seals Nitrile
- Stem, Seat, Adaptor & Washers Aluminum
- Filter Elements – 5 Micron (Standard)** Plastic
- 40 Micron (Optional) Plastic
- Adsorber (Optional) Activated Charcoal
- Seals** Nitrile



C

- Product Selection
- Filters
- Coalescers
- Regulators
- Filter / Regulators
- Lubricators
- Compos
- Accessories