


Viking Lite Series Valves

The Viking Lite Series pneumatic valve range is a robust, versatile valve which combines high performance with compact installation dimensions. Large flow capacity, short change-over times and low change-over pressure are important characteristics of the valve range.

WCS

- Maximum Performance
 - Low friction - fast response - less wear
- Long Cycle Life
 - Under pressure, radial expansion of the seal occurs to maintain sealing contact with the valve bore
- Non-Lube Service
 - No lubrication required for continuous valve shifting
- Bi-Directional Spool Seals
 - Common spool used for any pressure

WCS
Wear Compensation System

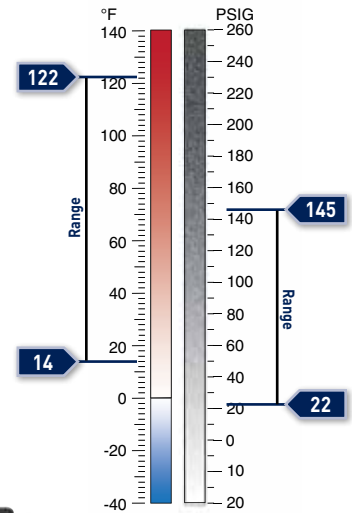

Robust anodized aluminum valve body

Stainless steel spring return

Diecast end covers with zinc plated screws.

- Solenoid operated, IP65, RoHS, CE
- 90° rotation

The bore is polished to a very high surface finish for maximum flow capacity and long life.

Valve options: Viking Lite

- 3-way, 2-position
- Single solenoid
- Spring return
- Double solenoid



- 4-way, 2-position
- Single solenoid
- Spring return
- Double solenoid



- 4-way, 3-position
 - Center exhaust
 - Pressure center
 - Blocked center



Valve port options

- 1/8, 1/4 & 3/8 inch NPT & BSP threads.

Solenoid options

- 22-pin, DIN



Manifold options

- IEM bar manifold kits



Lite Markets



Industrial



Automotive



Food Processing



Industrial



Industrial



Industrial

