

316L Stainless Steel Explosion Proof Coil

For Oil & Gas Market & Other Harsh Environments



The 316L Stainless Steel Explosion Proof Flameproof “d” coil reference 497105 is valid for Zone 1/21 and is compatible with existing Parker Fluid Control Division V, F, X Series.

Benefits:

- Lightweight and compact design
- Highly resistant to corrosion
- Easy installation
- Ease of maintenance
- Modular with all other current ATEX Parker Lucifer coils
- Inventory reduction
- Coil can be assembled or disassembled from its valve very easily
- Quick electrical cable connection
- Coil permits reversible up or down position of the threaded 1/2"NPT cable entry with 360° rotation capability

Markets:

- Chemical
- Petrochemical
- Oil & Gas Industries
- Agriculture
- Waste Treatment

Applications:

Control of solenoid valves in hazardous areas Zone 1-21

Technical Data

- Housing is made of 316L Stainless Steel
- Power consumption 8W Max
- 1/2" NPT or M20 x 1.5 cable entry
- Protection level IP66
- Peak voltage suppression and AC rectifier included as standard



Voltage Codes

Voltage	12VDC	24VDC	48VDC	110VDC	24/50-60VAC	110/50-60VAC	220-230/50-60VAC
Code	C1	C2	C4	C5	P0	1P	3P



ENGINEERING **YOUR** SUCCESS.


Solenoid Valve Product Range

316L Stainless Steel

Pipe Mounting

Port Size NPT	Function	Orifice (in)	Flow Factor (Cv)	Operating Pressure (PSI)			Fluid Temp. °F		Seat Seal	Parker LUCIFER® Valves		Electrical Connection	Power	
				Min	Max	MOPD	Min	Max		Valve Ref.	Coil Ref.		AC W	DC W
1/4"	3/2 universal auto reset	15/64"	.54	0	174	174	-13	150	NBR	U133X7196	497105 49710502	M20x1.5 1/2 NPT	8	8
	3/2 universal manual override	15/64"	.54	0	174	174	-13	150	NBR	U133X7156	497105 49710502	M20x1.5 1/2 NPT	8	8
	3/2 universal manual reset	15/64"	.54	0	174	174	-13	150	NBR	U033X7156	497105 49710502	M20x1.5 1/2 NPT	8	8
	3/2 universal	3/32"	.18	0	130	130	-13	167	FKM	U133V7695	497105 49710502	M20x1.5 1/2 NPT	8	8
	3/2 universal	5/64"	.10	0	174	174	-13	167	FKM	U133V7595	497105 49710502	M20x1.5 1/2 NPT	8	8
	2/2 normally closed	1/32"	.03	0	1,420	1,420	-13	167	FKM	U121V7595	497105 49710502	M20x1.5 1/2 NPT	8	8

Dimensions (in mm)

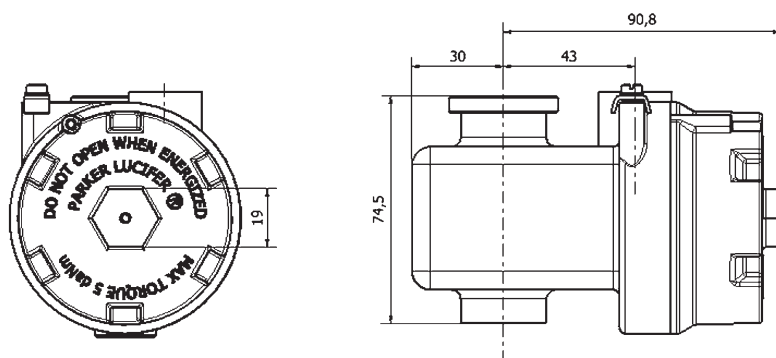

Ordering Example

To order a solenoid valve select:

Valve reference - Coil reference and voltage code.

Example for 24 VDC with M20 x 1.5 electrical connection: **U133X7196-497105C2**

