




Parker Metric Ball Valve Series BVGC

MATERIALS OF CONSTRUCTION	
VALVE BODY:	BRASS NICKEL PLATED TO DIN 17660 AND UNI 5705
BALL:	BRASS CHROME PLATED
SEATS / SEALS:	PTFE WITH SILICONE FREE LUBRICANT
PACKING GLAND:	PTFE
HANDLE:	LEVER – CARBON STEEL COMPACT – ALUMINUM

SPECIFICATIONS	
FEMALE BSPP SHORT THREADS MANUFACTURED IN ACCORDANCE TO ISO 228 / DIN 259	




Operating pressures and temperatures

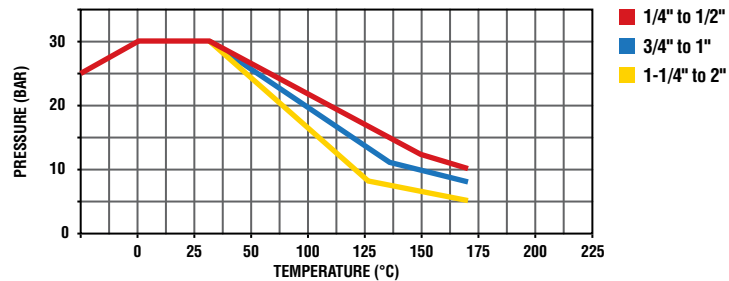


N.B. This chart gives general information. Only testing under operating conditions will finally determine which valve should be selected.

Advantages

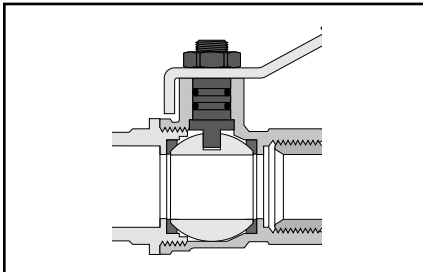


Adjustable packing

The PTFE packing gland and adjustable washer are designed to give longer service life and lower operating torques.

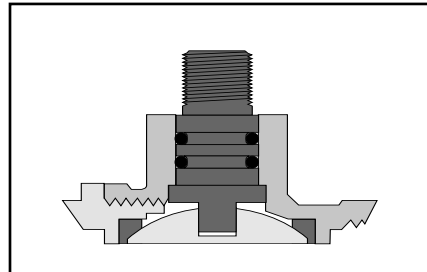

Anti extrusion stem

The BVGC series ball valves are fitted with an anti-extrusion stem to prevent blow out in the case of pressure peaks.

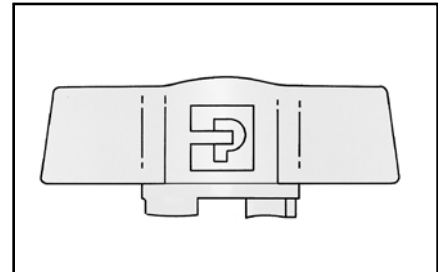


Compact handle

For applications where space is at a premium, the BVGC series valve is available with a compact handle in sizes up to 1".



BVGC BSPP Female/Female Valve With Lever Handle

PART NO.	DN MM	THREAD BSPP	C	H	L	L1	O
BVG4-1/4C	8	1/4	20	39.5	39	82	25.0
BVG4-3/8C	10	3/8	20	39.5	39	82	25.0
BVG4-1/2C	15	1/2	25	44.0	50	100	32.5
BVG4-3/4C	20	3/4	31	50.0	54	120	39.0
BVG4-1C	25	1	38	54.0	67	120	47.5
BVG4-1.1/4C	32	1.1/4	48	76.5	77	158	59.0
BVG4-1.1/2C	40	1.1/2	54	82.5	90	158	71.5
BVG4-2C	50	2	66	89.5	106	158	86.0

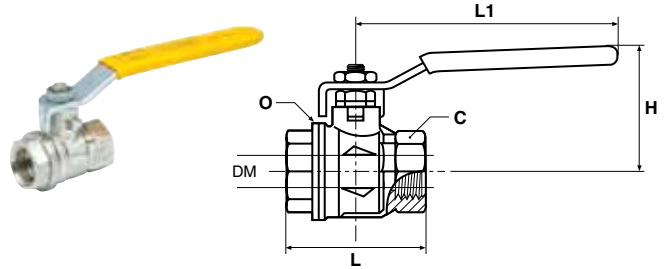

BVGT4 BSPP Female/Female Valve with Compact Handle

PART NO.	DN MM	THREAD BSPP	C	H	L	L1	O
BVGT4-1/4C	8	1/4	20	40	39	50	25.0
BVGT4-3/8C	10	3/8	20	40	39	50	25.0
BVGT4-1/2C	15	1/2	25	44	50	50	32.5
BVGT4-3/4C	20	3/4	31	49	54	60	39.0
BVGT4-1C	25	1	38	53	67	60	47.5

