



## AND Element



PLLA11

Part Number	Description
PLLA11	5/32" Instant

## OR Element



PLKA11

Part Number	Description
PLKA11	5/32" Instant


## Mounting Clip Assembly



PZML199

Part Number	Description
PZML199	1 Set of Clip Assemblies

## Dimensions

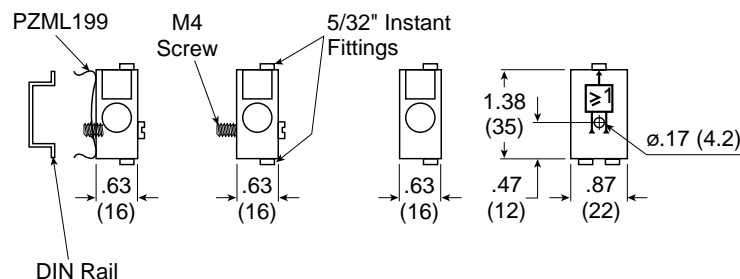

## Specifications

- Air Quality –**  
 Standard Shop Air, Lubricated or Dry, 40 µm Filtration
- Cv** .....0.14 (1.8)
- Flow rate at 90 PSI (6 bar) in SCFM (l/mn ANR)** ...6.4 (180)
- Materials –**  
 - Body.....Polyamide  
 - Poppet..... Polyurethane  
 - Seals..... Nitrile (Buna N)
- Mounting** ..... Inline or 35mm DIN Rail
- Number of Operations with Dry Air at 90 PSI and 70°F, Frequency 1 Hz**..... 10 Million
- Operating Positions**.....All Positions
- Operating Pressure** .....20 to 115 PSIG (1.4 to 8 bar)
- Ports –**  
 Standard: 5/32" Instant for Semi- Rigid Nylon or Polyurethane Tube  
 10-32 UNF Available
- Response Time** ..... 2 to 3 msec
- Temperature –**  
 Operating ..... 32°F to 122°F (0°C to +50°C)  
 Storage ..... -22°F to 140°F (-30°C to +60°C)

