


General Description

Series FC, FD throttle check valves are designed for maximum flow rates.

The throttle check function is located in ports A and B. Meter-in or meter-out functionality can be selected by model code.


Features

- High flow capacity.
- Various functional arrangements.
- Sizes:
 - FC05, FD05 – NFPA D05 / NG10 / CETOP 5
 - FC05H, FD5H – NFPA D05HE / NG10 / CETOP 5H
 - FC07, FD07 – NFPA D07 / NG16 / CETOP 7
 - FC08, FD08 – NFPA D08 / NG25 / CETOP 8


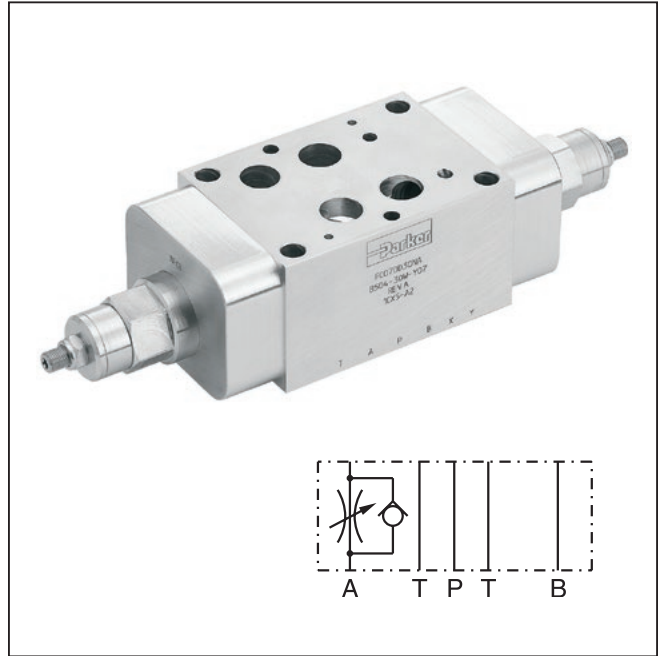


Specifications

General					
Size		D05 / NG10	D05HE / NG10	D07 / NG16	D08 / NG25
Mounting Position	Unrestricted				
Ambient Temperature Range	-20°C to +50°C (-4°F to +122°F)				
Hydraulic					
Maximum Operating Pressure	Aluminum Body – up to 207 Bar (3000 PSI); Ductile Iron Body – up to 345 Bar (5000 PSI)				
Nominal Flow	95 LPM (25 GPM)	95 LPM (25 GPM)	227 LPM (60 GPM)	454 LPM (120 GPM)	
Leakage	< 5 DPM	< 5 DPM	< 5 DPM	< 5 DPM	
Cracking Pressure	30 ± 0.2 Bar (3 PSI)				
Fluid Temperature	-20°C to +80°C (-4°F to +176°F)				
Viscosity	Permitted	10 to 650 cSt / mm ² /s (46 to 3013 SSU)			
	Recommended	30 cSt / mm ² /s (139 SSU)			
Filtration	ISO Class 4406 (1999) 18/16/13 (acc. NAS 1638: 7)				

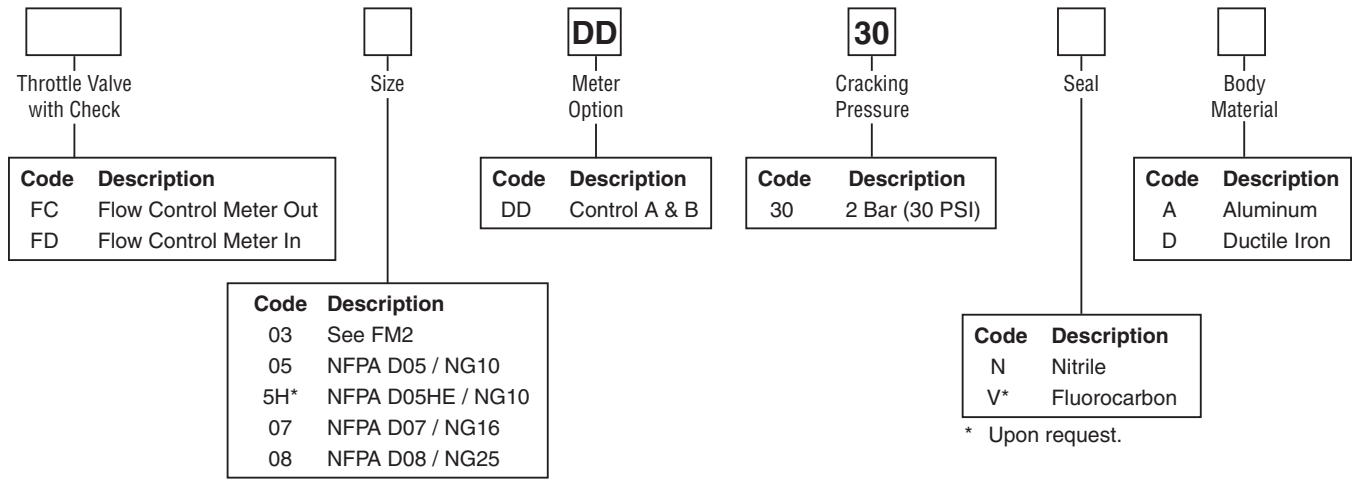

* Valve comes with D05HE (ISO) pattern seal plate (990-120-012). If D05H pattern is required, order seal plate kit 990-120-009.




Weight:

Size	FC**DD30NA, FD**DD30NA	FC**DD30ND, FD**DD30ND
FC05, FC5H, FD05, FD5H	1.3 kg (2.9 lbs.)	2.6 kg (5.7 lbs.)
FC07	3.4 kg (7.6 lbs.)	6.9 kg (15.3 lbs.)
FC08	7.1 kg (15.7 lbs.)	14.7 kg (32.5 lbs.)


FC05/FC5H, FD05/FD5H

Pressure Differential vs. Free Flow
 Fluid Viscosity 30 cSt at 50°C (122°F)

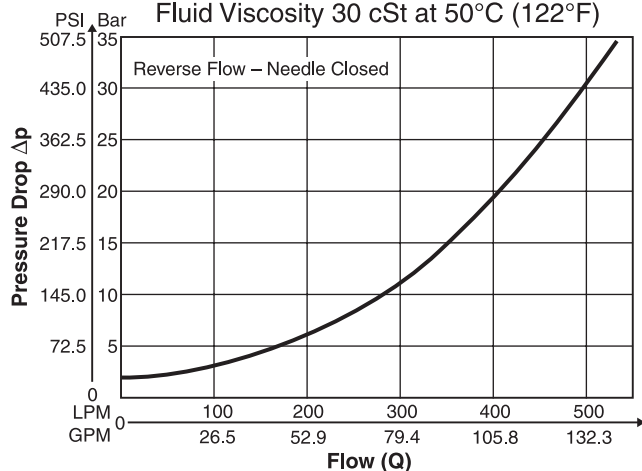


FC05/FC5H, FD05/FD5H

Pressure Differential vs. Metered Flow
 Fluid Viscosity 30 cSt at 50°C (122°F)

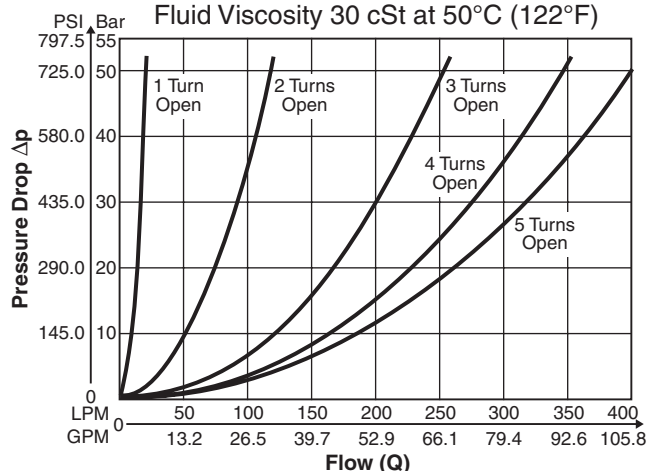


FC07, FD07

Pressure Differential vs. Free Flow
 Fluid Viscosity 30 cSt at 50°C (122°F)

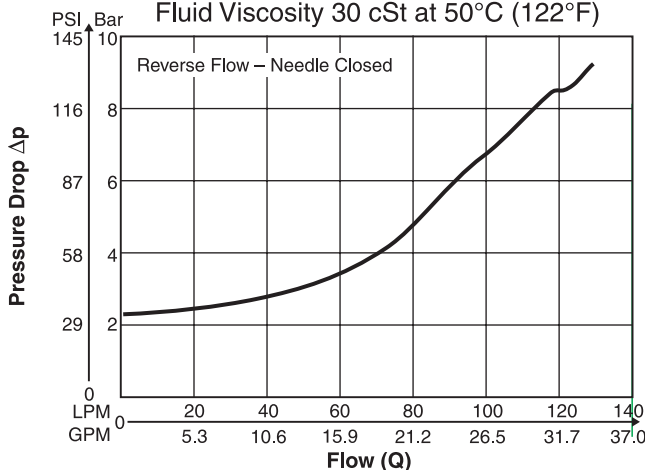


FC07, FD07

Pressure Differential vs. Metered Flow
 Fluid Viscosity 30 cSt at 50°C (122°F)

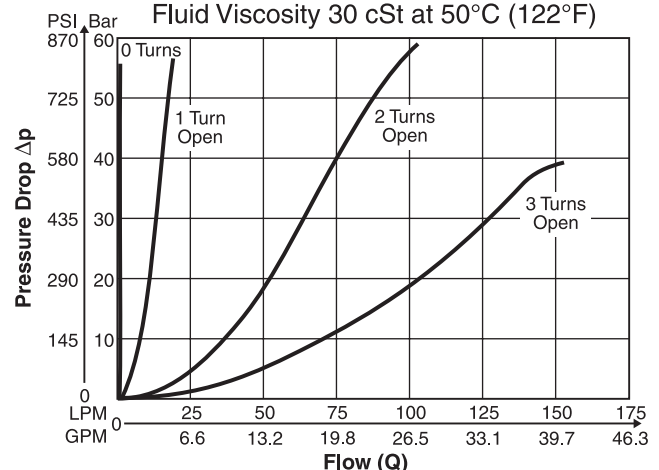


FC08, FD08

Pressure Differential vs. Free Flow
 Fluid Viscosity 30 cSt at 50°C (122°F)

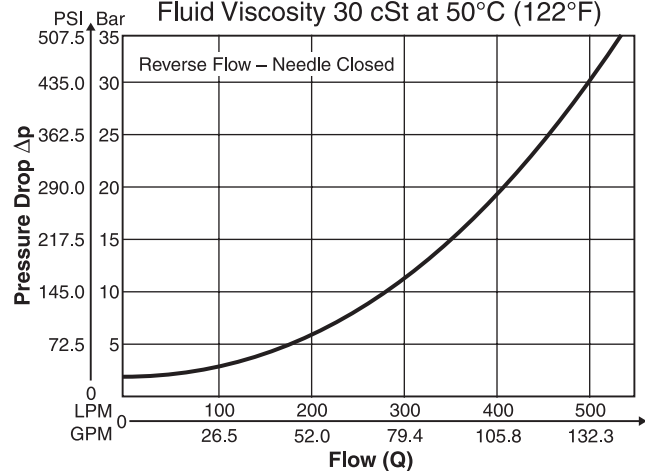


FC08, FD08

Pressure Differential vs. Metered Flow
 Fluid Viscosity 30 cSt at 50°C (122°F)

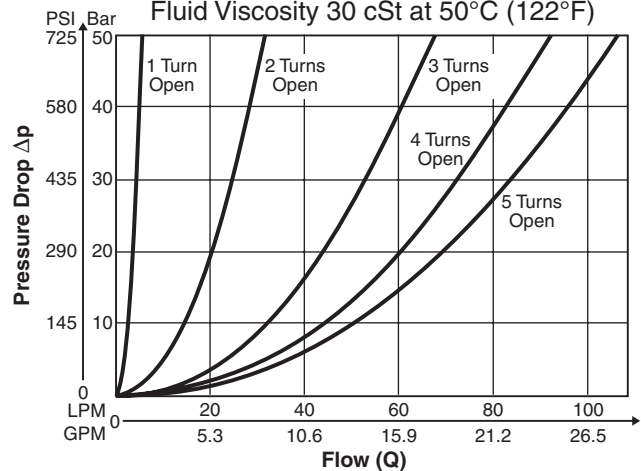


Dimensions

FC05DD – Inch equivalents for millimeter dimensions are shown in (**)

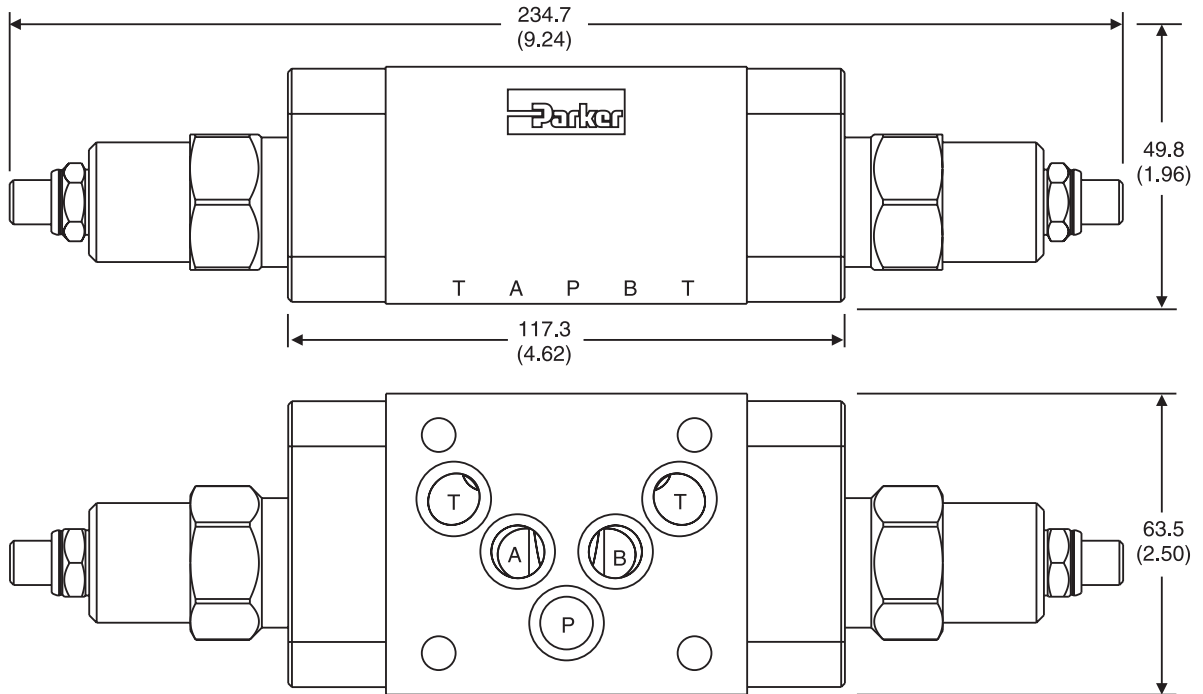

FC5HDD – Inch equivalents for millimeter dimensions are shown in (**)

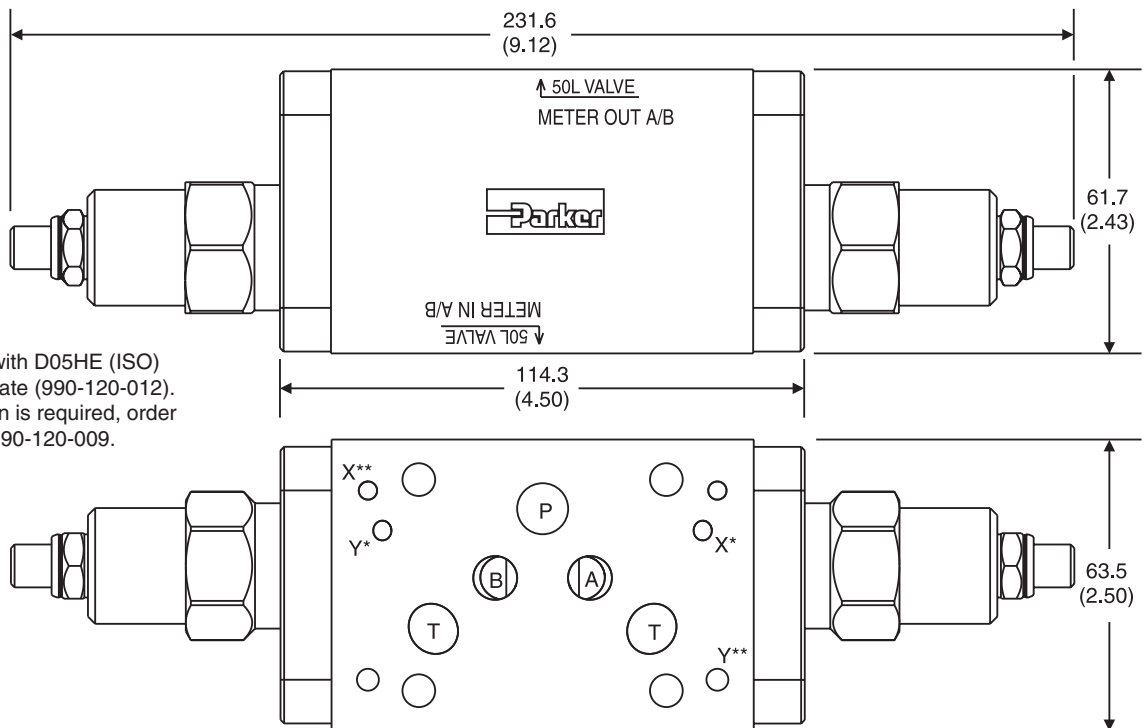


Valve comes with D05HE (ISO) pattern seal plate (990-120-012). If D05H pattern is required, order seal plate kit 990-120-009.

* D05HE (Standard)
** D05H




Dimensions

FC07DD – Inch equivalents for millimeter dimensions are shown in (**)

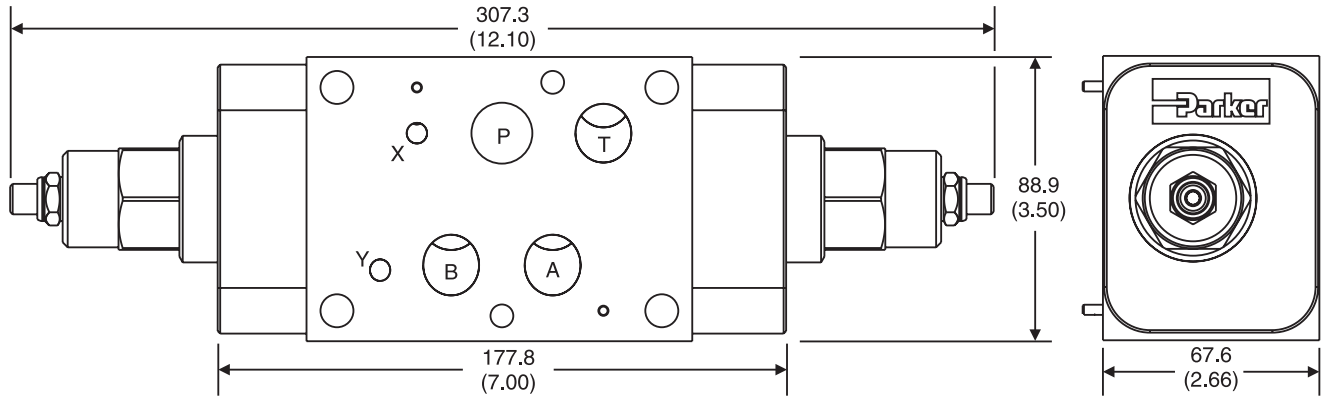


FC08DD – Inch equivalents for millimeter dimensions are shown in (**)

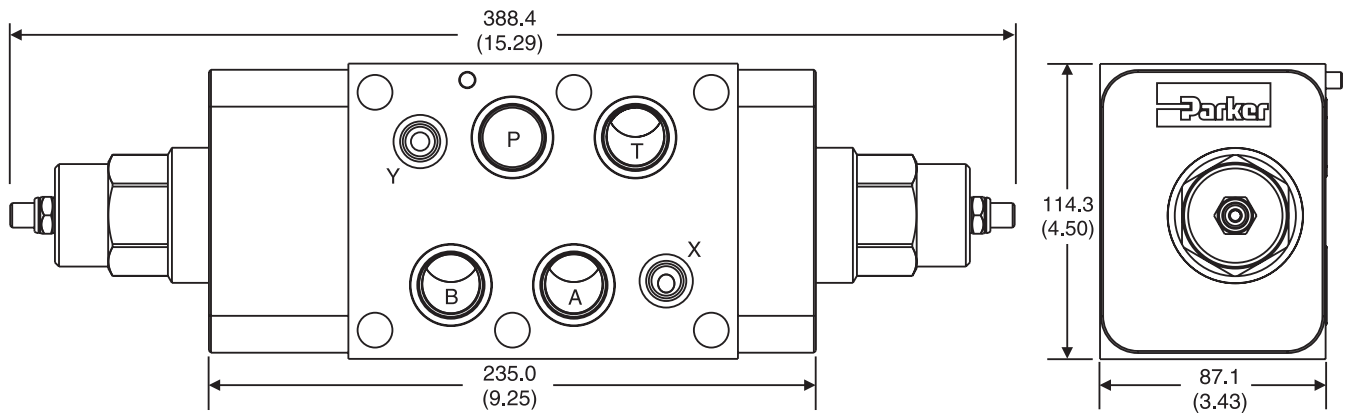


Dimensions

FD05DD – Inch equivalents for millimeter dimensions are shown in (**)

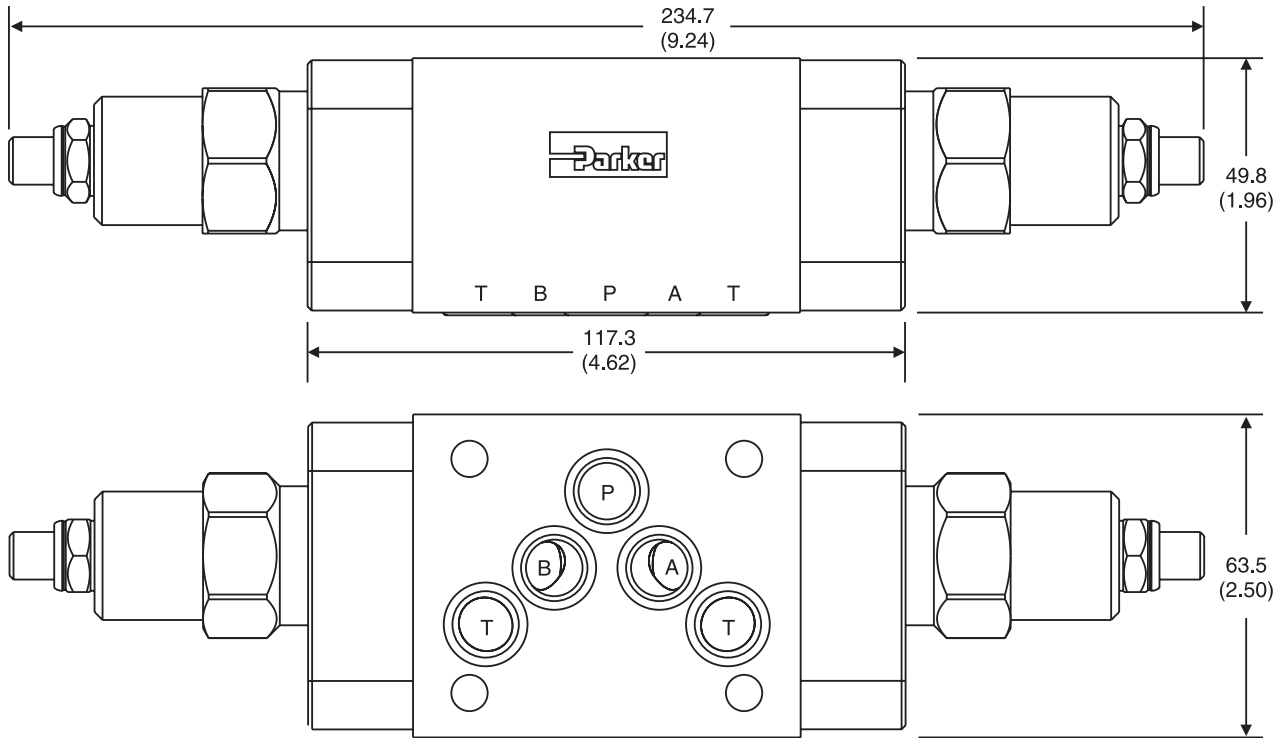

FD5HDD – Inch equivalents for millimeter dimensions are shown in (**)

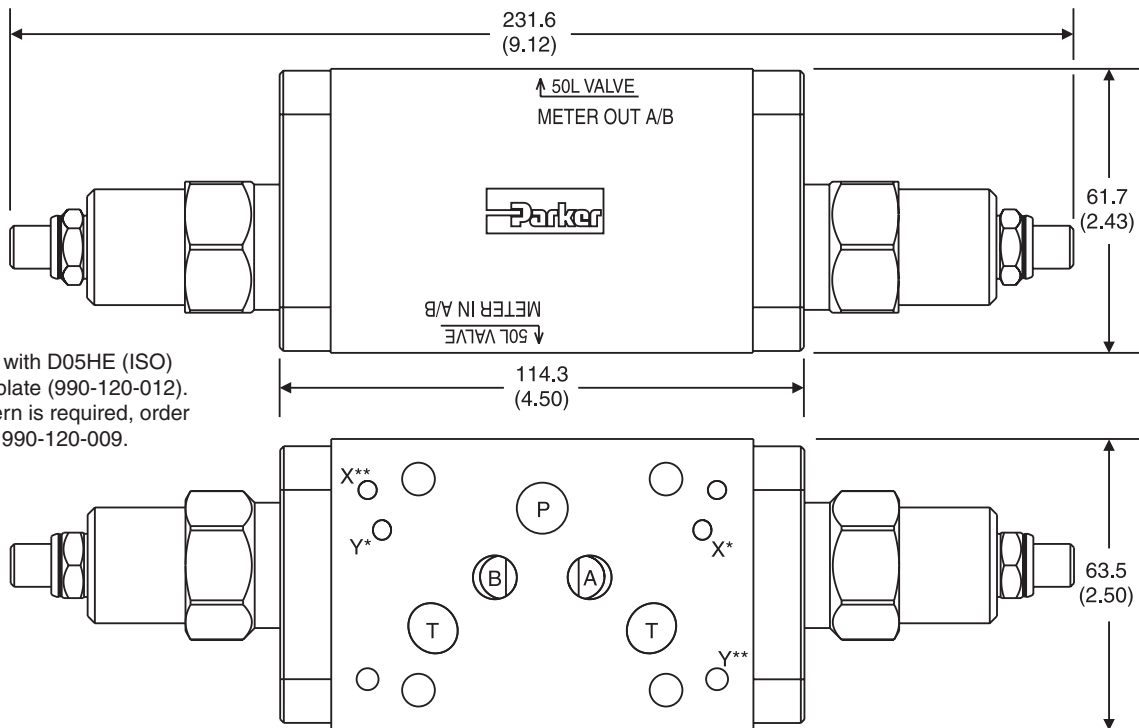


Valve comes with D05HE (ISO) pattern seal plate (990-120-012). If D05H pattern is required, order seal plate kit 990-120-009.

- * D05HE (Standard)
- ** D05H




Dimensions

FD07DD – Inch equivalents for millimeter dimensions are shown in (**)

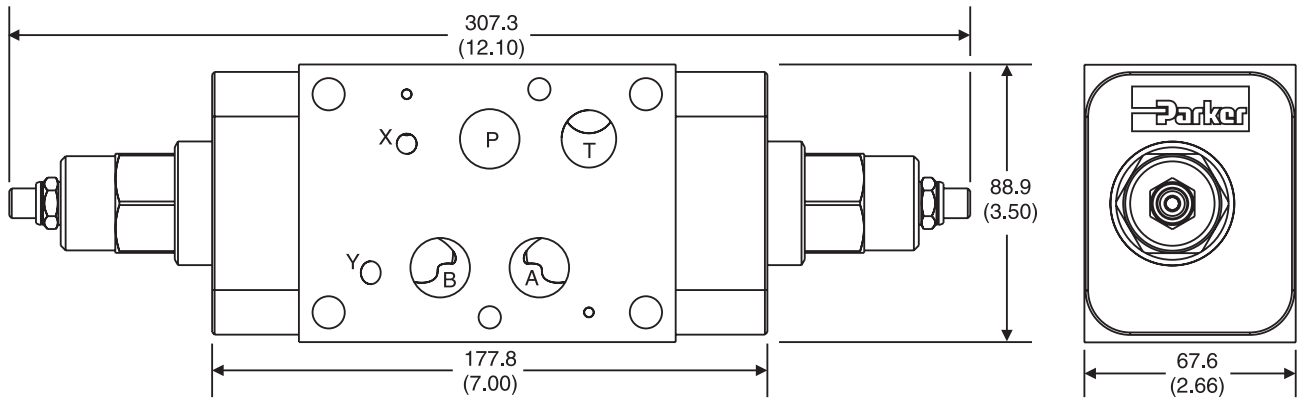

FD08DD – Inch equivalents for millimeter dimensions are shown in (**)

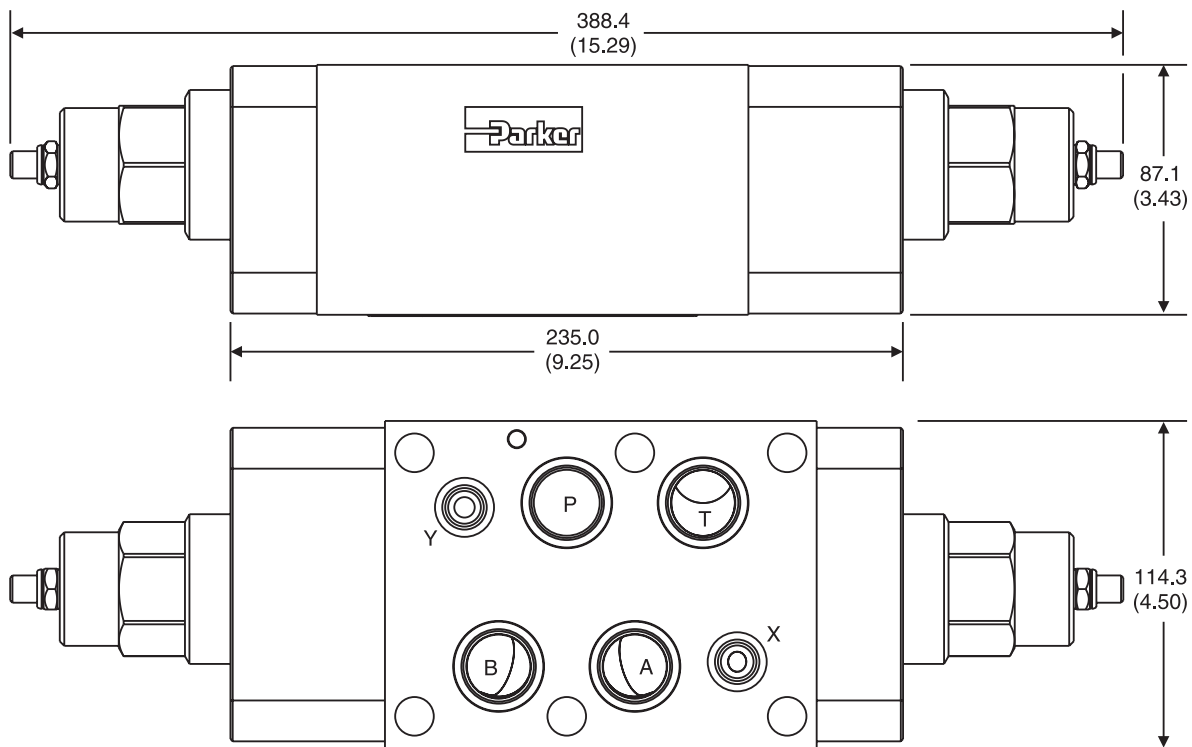



WARNING – USER RESPONSIBILITY

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

OFFER OF SALE

The items described in this document are hereby offered for sale by Parker-Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated in the detailed "Offer of Sale" elsewhere in this document or available at www.parker.com/hydraulicvalve.

SAFETY GUIDE

For safety information, see Safety Guide SG HY14-1000 at www.parker.com/safety or call 1-800-CParker.



Parker Hannifin Corporation
Hydraulic Valve Division
520 Ternes Avenue
Elyria, Ohio 44035 USA
Tel: 440 366 5100
Fax: 440 366 5253
www.parker.com/hydraulicvalve

