


| NOMENCLATURE | | | | | | | |
|----------------------|-----------------|--|--|--|--|--|--|
| EXAMPLE: 255MP-6-4-2 | ATTRIBUTE: | | | | | | |
| 2 | 2 ENDS | | | | | | |
| 5 | 5 TOP PORTS | | | | | | |
| 5 | 5 SIDE PORTS | | | | | | |
| М | MANIFOLD | | | | | | |
| Р | PIPE THREAD | | | | | | |
| 6 | 3/8" END PORTS | | | | | | |
| 4 | 1/4" TOP PORTS | | | | | | |
| 2 | 1/8" SIDE PORTS | | | | | | |


| SPECIFICATIONS | | | | | | | | |
|------------------------|------------------------------|--|--|--|--|--|--|--|
| PRESSURE RANGE: | UP TO 1,000 PSI | | | | | | | |
| TEMPERATURE RANGES: | -65° TO +250°F | | | | | | | |
| OPERATING FLUID: | AIR, WATER, HYDRAULIC FLUIDS | | | | | | | |

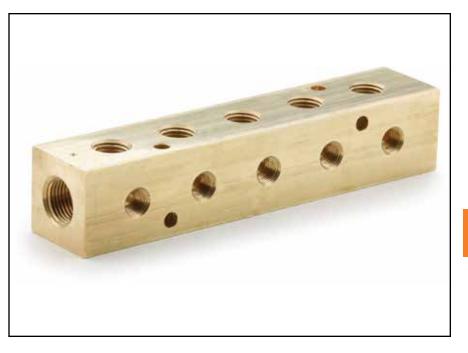

This brass manifold provides a convenient junction for the hook-up of multi-branch distribution lines. Porting is easy with five 1/8" and five 1/4" side ports. Two 3/8" inlet ports allow for maximum flow.

Brass Manifold 255M

| PART NO. | PIPE THREAD A | PIPE THREAD B | PIPE Thread C | G | MOUNTING Hole Dia. H | J | K | L | М | N | D |
|-------------|---------------------|---------------------|---------------------|------|----------------------------|-----|------|------|------|-----|-----|
| 255MP-6-4-2 | 3/8 | 1/8 | 1/4 | 1.25 | .22 | .88 | 1.13 | 6.25 | 1.45 | .25 | .25 |

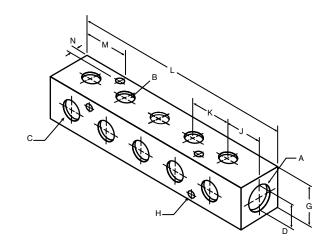



Parker Hannifin Corporation Fluid System Connectors Otsego, Michigan