



# Truck Valves & Lanyard Valve

E

MATERIALS OF CONSTRUCTION	
VALVE BODY:	BRASS
STEM:	BRASS


TRUCK VALVE NOMENCLATURE	
EXAMPLE: V404P-6-6	ATTRIBUTE:
V	VALVE
404	HOSE TO MALE PIPE
P	PIPE
6	3/8" TUBE O.D.
6	3/8" PIPE THREAD

LANYARD VALVE NOMENCLATURE	
EXAMPLE: LV91-4-060	ATTRIBUTE:
LV91	LANYARD VALVE
4	1/4" PIPE THREAD
060	LENGTH OF CABLE IN INCHES

SPECIFICATIONS	
PRESSURE RANGE	VALVES UP TO 150 PSI UNLESS OTHERWISE NOTED
TEMPERATURE RANGE	SEE SPECIFIC PART NUMBER FOR TEMPERATURE RANGE



Truck valves have metal-to-metal seats with fine thread screwdown. The lanyard valves' compact design is ideally suited for releasing condensate from air tanks. Brass construction with specially formulated low temperature seal which remains elastic to temperature as low -40°F.




### Lanyard Valve Operating Instructions

A pulling action exerted on the cable cocks the stem, allowing condensate to pass through the valve. Releasing the cable resets the stem which returns the valve to its closed position.

### Truck Valve V404P


Hose to Male Pipe  
Temperature Range: -30° to +250° F



PART NO.	HOSE I.D.	PIPE THREAD	FLOW	L	M	N
V404P-6-6	3/8	3/8	.281	2.35	1.36	.94
V404P-10-6	5/8	3/8	.406	2.75	1.31	1.15

### Truck Valve V404PH


Hose to Male Pipe with Pin Handle  
Temperature Range: -30° to +250° F



PART NO.	HOSE I.D.	PIPE THREAD	FLOW	L	M	N
V404PH-10-6	5/8	3/8	.406	2.47	1.31	1.09

### Truck Valve SV404P


Hose to Male Pipe  
Temperature Range: -30° to +250° F



PART NO.	HOSE I.D.	PIPE THREAD	FLOW	L	M	N
SV404P-10-8	5/8	1/2	.468	3.71	2.31	1.34
SV404P-12-6	3/4	3/8	.438	3.73	2.31	1.34
SV404P-12-8	3/4	1/2	.562	3.73	2.31	1.34

### Truck Valve V405P


Female Pipe to Male Pipe  
Temperature Range: -30° to +250° F



PART NO.	FEMALE PIPE THREAD	MALE PIPE THREAD	FLOW	L	M	N
V405P-6-6	3/8	3/8	.406	2.72	.91	1.19
V405P-6-8	3/8	1/2	.406	2.95	.91	1.31
V405P-8-8	1/2	1/2	.562	3.15	1.17	1.34

### Truck Valve V408NTA


Tube to Male Pipe  
Temperature Range: -30° to +250° F



PART NO.	TUBE SIZE	PIPE THREAD	FLOW	L	M	N
V408NTA-8-8	1/2	1/2	.328	3.28	1.15	1.19

### Truck Valve V409F


Flare to Male Pipe  
Temperature Range: -30° to +250° F



PART NO.	TUBE SIZE	PIPE THREAD	FLOW	L	M	N
V409F-8-6	1/2	3/8	.406	3.07	1.31	1.00
V409F-8-8	1/2	1/2	.406	3.28	1.31	1.19
V409F-10-8	5/8	1/2	.500	3.47	1.50	1.25
V409F-12-8	3/4	1/2	.562	3.70	2.31	1.34

### Truck Valve V410NTA


Tube to Male Pipe  
Temperature Range: -30° to +250° F



F PART NO.	TUBE SIZE	PIPE THREAD	FLOW	L	M	N
V410NTA-8-8	1/2	1/2	.328	3.58	1.38	1.31


### Truck Valve V412F

Tube to Male Pipe  
Temperature Range: -30° to +250° F



PART NO.	TUBE SIZE	PIPE THREAD	FLOW	L	M	N
V412F-10-8	5/8	1/2	.500	3.60	1.38	1.31

LV91HF-4-SUB

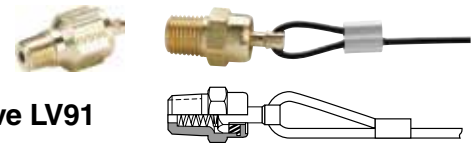

### Lanyard Valve LV91

Temperature Range: -40° to +200° F

PART NO.	PIPE THREAD	CABLE LENGTH INCHES
LV91-4-036	1/4	36
LV91-4-048	1/4	48
LV91-4-060	1/4	60
LV91HF-4-SUB	1/4	--



### Notes

E

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

