



Series MH Heavy Duty Mill Hydraulic Cylinder

*Catalog HY08-1117-1/NA
May, 2008*



- Meets All NFPA Mounting Dimensions
- Heavy Duty Service – Mill Type Construction
- Nominal Pressure – 2000 PSI
- Standard Bore Sizes – 1-1/2" through 14"
- Piston Rod Diameters – 5/8" through 10"

The heavy-duty mill hydraulic cylinder with features only Parker can promise – and deliver!

Series MH cylinders keep on performing like you expect from Parker — millions of trouble-free cycles. Everything you need for reliable 2,000 psi performance:

- Chrome-plated, induction hardened piston rods.
- Heads retained with ASTM A-574 socket head cap screws.
- Floating cushions with float-check action and positive metal-to-metal seal.
- And every cylinder is individually tested before it leaves our plant.



Certified Dimensions

Parker Cylinders guarantees that all cylinders ordered from this catalog will be built to dimensions shown. All dimensions are certified to be correct, and thus it is not necessary to request certified drawings.

⚠ Warning

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application, including consequences of any failure and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The product described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.


Offer of Sale

The items described in this document are hereby offered for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by provisions stated on a separate page of the document entitled 'Offer of Sale'.

Table of Contents

Design Features and Materials.....	2-3
Cushion Data.....	2-3
How to Order	4
Mounting Style Index.....	5
Dimensions: 1 1/2" - 8" Bore	6-13
10" - 14" Bore.....	16-23
Double Rod Models.....	14-15
Accessories	24-25
Style 55 Rod End, Split Coupler, and Weld Plate.....	26-27
Linear Alignment Coupler	27
Spherical Bearing Mounting Accessories.....	28
Metallic Rod Wiper	29
Gland Drain	29
Air Bleeds	29
Piston Rod Boots.....	29
Proximity Switches	30-35
Low Friction Seals	36-37
Ports	38
Hydraulic Cylinder Speeds	39
Acceleration and Deceleration Force Determination	40
Stop Tube	41
Thrust-Key Retainer Plate	41
Piston Rod Selection	42-43
Selecting Proper Cylinder Size and Pressure Table	44
Assembly Torque Values.....	45
Cylinder Safety Guide.....	46-47
Parts Identification	48
Repair Kit.....	48
Offer of Sale	Inside Back Cover

The inside story on why Series MH is your best choice in heavy duty mill hydraulic cylinders

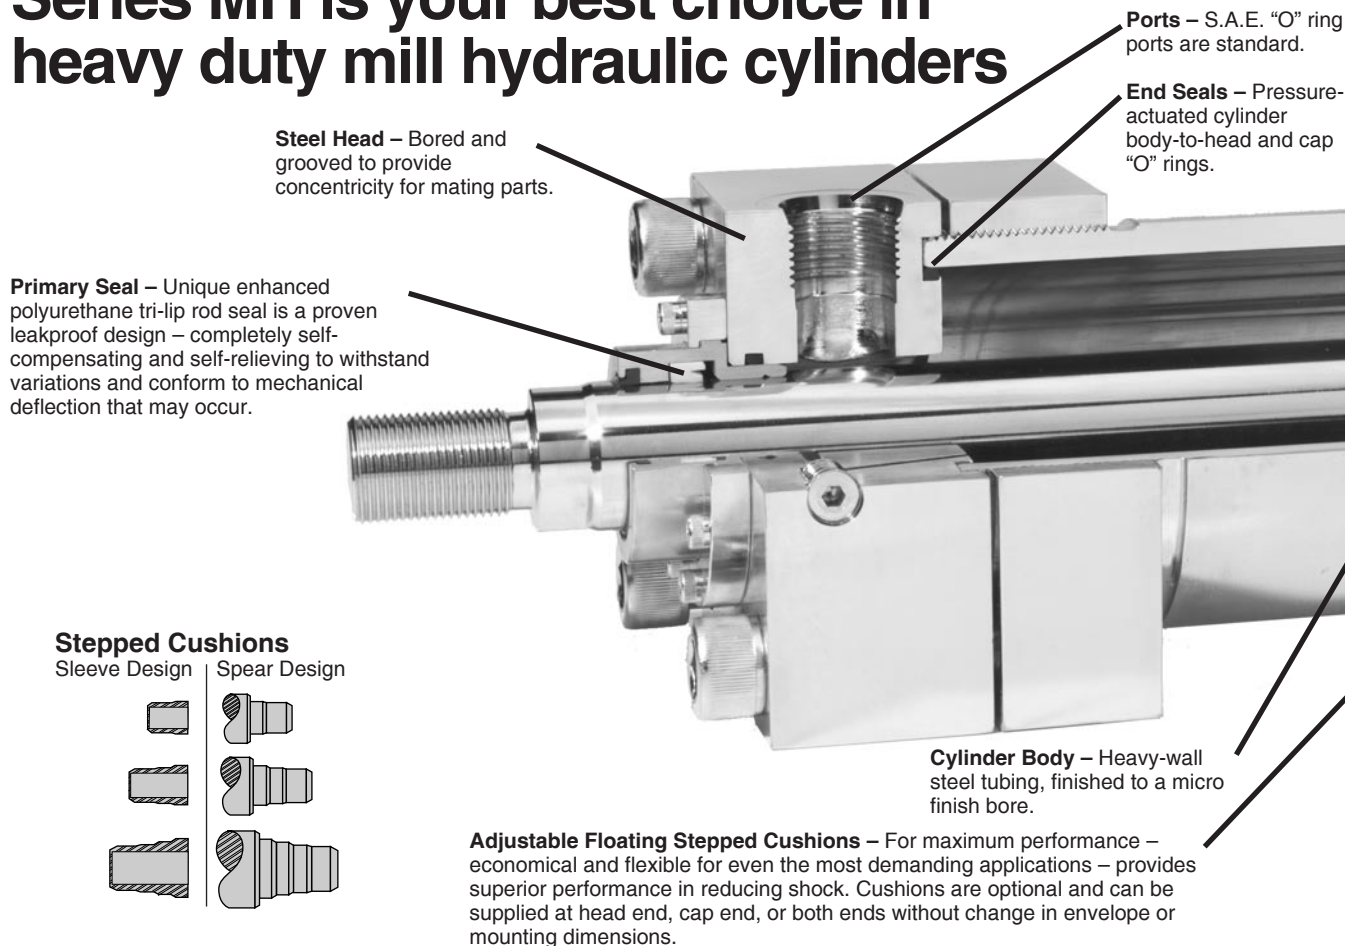

Stepped floating cushions combine the best features of known cushion technology.

Deceleration devices or built-in "cushions" are optional and can be supplied at head end, cap end, or both ends without change in envelope or mounting dimensions. Cushions are a stepped design and combine the best features of known cushion technology.

Standard straight or tapered cushions have been used in industrial cylinders over a very broad range of applications. Extensive research has found that both designs have their limitations.

As a result, we have taken a new approach in cushioning of industrial mill hydraulic cylinders and for specific load and velocity conditions have been able to obtain deceleration curves that come very close to the ideal. The success lies in a stepped sleeve or spear concept where the steps are calculated to approximate theoretical orifice areas curves.

In the cushion performance chart, pressure traces show the results of typical orifice flow conditions. Tests of a three-step sleeve or spear show three pressure pulses coinciding with the steps. The deceleration cushion plunger curves shape comes very close to being theoretical, with the exception of the last $1/2$ inch of travel. This is a constant shape in order to have some flexibility in application. The stepped cushion


design shows reduced pressure peaks for most load and speed conditions, with comparable reduction of objectionable stopping forces being transmitted to the load and the support structure.


All cushions are adjustable.

The Series MH cylinder design incorporates the longest cushion sleeve and cushion spear that can be provided in the standard envelope without decreasing the rod bearing and piston bearing strengths.

(1) When a cushion is specified at the head end:

- a. A self-centering stepped sleeve is furnished on the piston rod assembly.

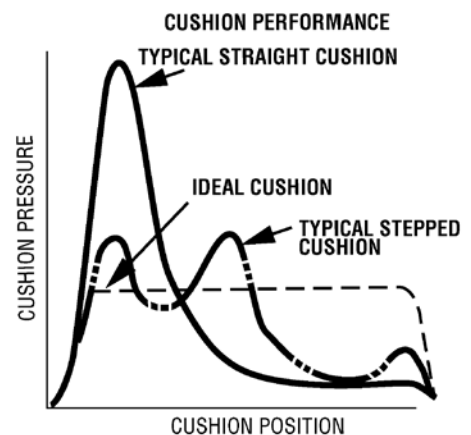

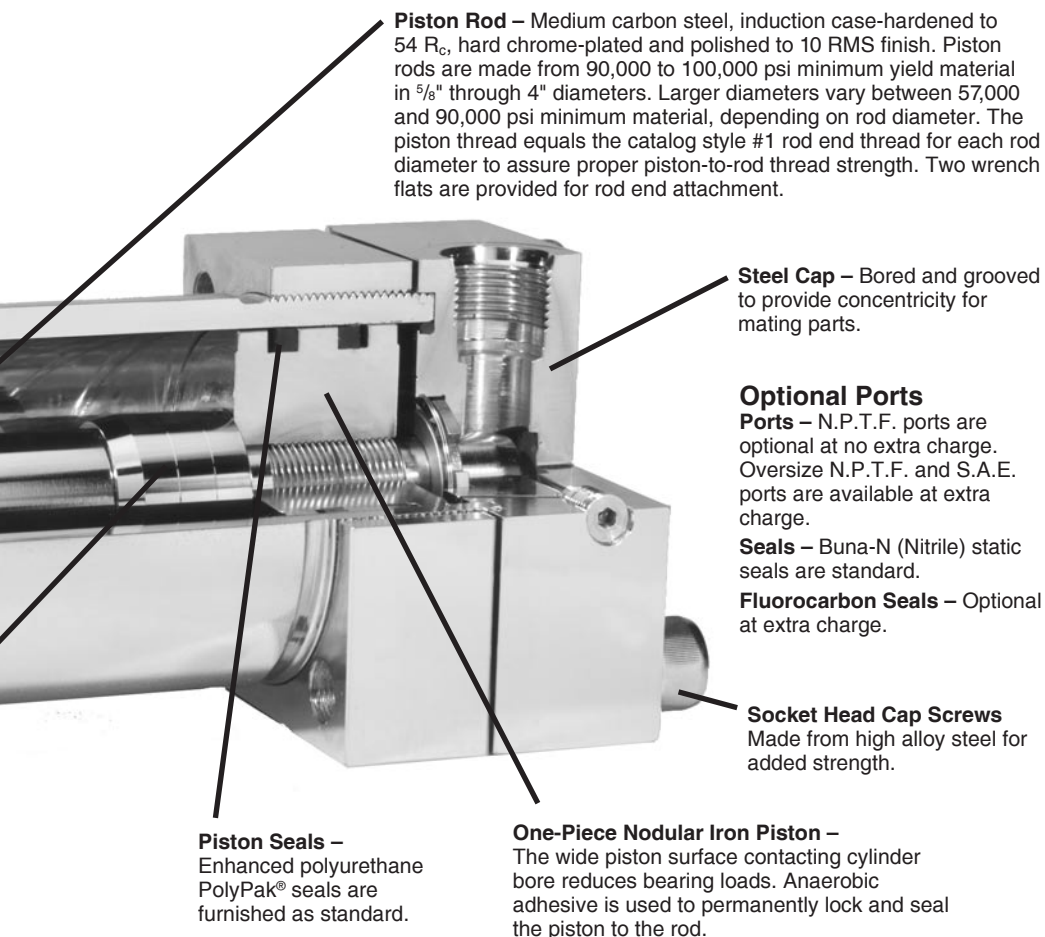**Bolted Standard Rod Gland**

The rod gland is a unitized design that is piloted into the rod head and carries the unique enhanced polyurethane tri-lip rod seal. An extra-long inboard bearing surface insures lubrication from within the cylinder. A spiral groove on the bearing area helps eliminate drag pressure that can cause damage to the rod seal and provides positive lubrication for less wear.

Parker Low Friction Rod Gland

– Parker's low friction rod gland provides the same unitized design as the standard rod gland with low friction seals. The filled PTFE seals in tandem with the wiperseal offer a virtual zero leak seal system with very low slip-stick and smooth operation up to 2000 psi. The spiral groove is also utilized from the standard rod gland.

Cast Iron Piston Ring – Optional at no extra charge.

Low Friction Piston – Optional at extra charge. Includes wear rings and filled PTFE seals. Two wear rings serve as bearings which deform radially under side-loading, enabling the load to be spread over a larger area and reduce unit loading. A filled PTFE seal designed for extrusion-free, low friction service and longer cylinder life than the standard piston.

- b. A needle valve is provided that is flush with the side of the head even when wide open. It may be identified by the fact that it is socket-keyed. It is located on side number 2, in all mounting styles except D, JB and E.
 - c. On 5" bore and larger cylinders a springless check valve is provided that is also flush with the side of the head and is mounted opposite to the needle valve except on mounting style E, D and JJ, where it is mounted adjacent to the needle valve. It may be identified by the fact that it is slotted.
 - d. On 1½" - 4" bore cylinders, a slotted sleeve design is used in place of the check valve.
 - e. 1½" - 2" bore cylinders use a cartridge style needle valve. (See Figure A)
- (2) When a cushion is specified at the cap end:
- a. A cushion stepped spear is provided on the piston rod.
 - b. A "float check" self-centering bushing is provided on 1½" - 6" bore which incorporates a large flow check valve for fast "out-stroke" action. A springless ball check valve is provided from 7" - 14" bore cylinders.
 - c. A socket-keyed needle valve is provided that is flush with the side of the cap when wide open. It is located on side number 2 in all mounting styles except E, D and HH. In these styles it is located on side number 3.

Cushion Length

Cyl. Bore In.	Rod Dia. In.	Cushion Length – Inch	
		Head*	Cap
1½	5/8	1⅛	1⅜
	1	1⅛	1⅜
2	1	1⅛	1⅛
	1⅜	1⅛	1⅛
2½	1	1⅛	1⅛
	1⅜	1⅛	1⅛
3¼	1⅜	1⅜	1⅝
	2	1⅞	1⅝
4	1⅜	1⅜	1¼
	2½	1⅞	1¼
5	2	1⅞	1⅞
	3½	1⅞	1⅞

Cyl. Bore In.	Rod Dia. In.	Cushion Length – Inch	
		Head*	Cap
6	2½	1⅞	1½
	4	1⅞	1½
7	3	1⅞	1⅞
	5	1⅞	1⅞
8	3½	2⅞	2
	5½	1⅞	2

*Head end cushions for rod diameters not listed have cushion lengths with the limits shown.


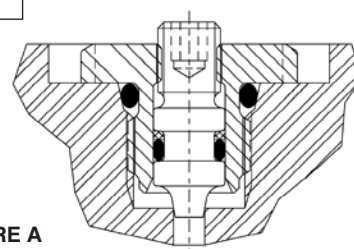


FIGURE A

How to Order Series MH Heavy Duty Mill Hydraulic Cylinders

How to Order Code

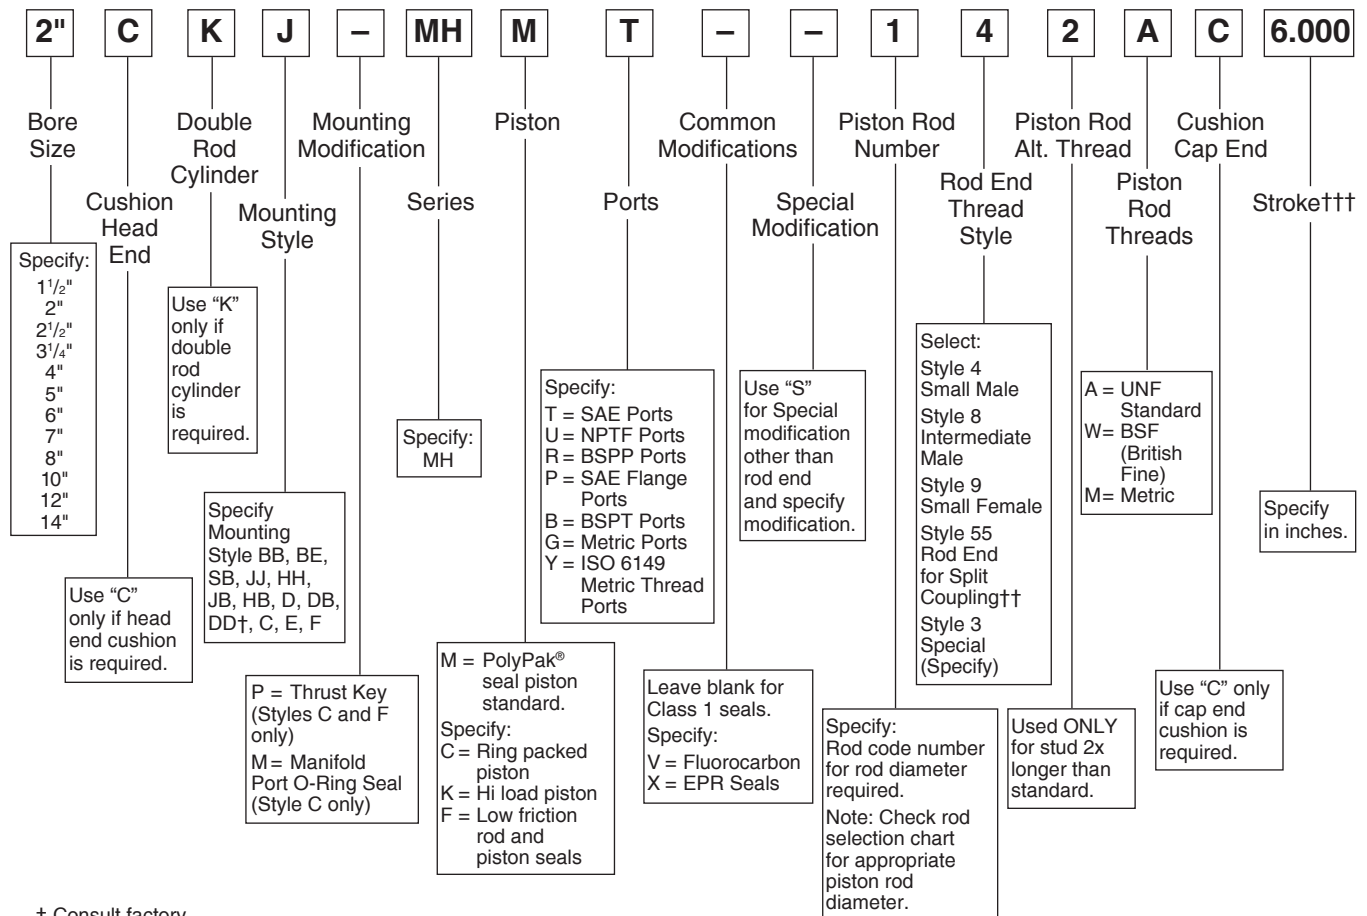

† Consult factory.

†† For information regarding Style 55 Rod Ends, see page 26.

††† In case of Stop Tube, call out gross stroke length (net stroke + stop tube length).

Note: Duplicate cylinders can be ordered by giving the serial number from the rod end head of the original cylinder. Factory records will supply a quick and positive identification. Additional data is required on orders for cylinders with special modifications. For further information, consult factory.

Standard Specifications















- Heavy Duty Service – ANSI / (NFPA) T3.6.7R2-1996 Specifications and Mounting Dimension Standards
- Standard Construction – Square Head – Mill Design
- Nominal Pressure – 2000 P.S.I.*
- Bore Sizes – 1½" through 14" (Larger sizes available)
- Mounting Styles – 14 standard styles at various application ratings
- Piston Rod Diameter – 5/8" through 10"
- Rod Ends – Five Standard Choices – Specials to Order
- Strokes – Available in any practical stroke length
- Cushions – Optional at either end or both ends of stroke. "Float Check" at cap end.
- Standard Fluid – Hydraulic Oil
- Standard Temperature – -10° F to +165° F

*If hydraulic operating pressure exceeds 2000 P.S.I., send application data for engineering evaluation and recommendation.

In line with our policy of continuing product improvement, specifications in this catalog are subject to change.

Note: Series MH Mill Hydraulic Cylinders meet ANSI / (NFPA) T3.6.7R2-1996 Specifications and Mounting Dimension Standards for Square Head Industrial Fluid Power Cylinders.

Mounting Styles

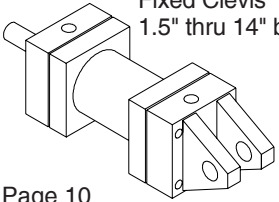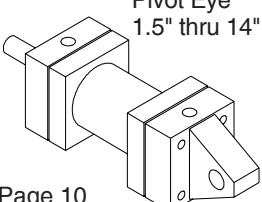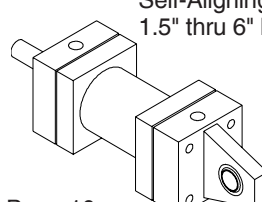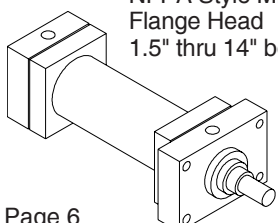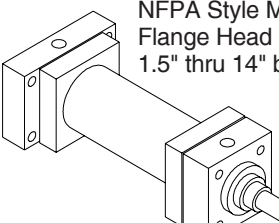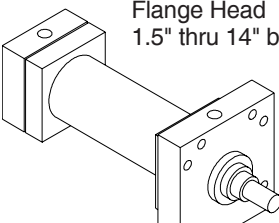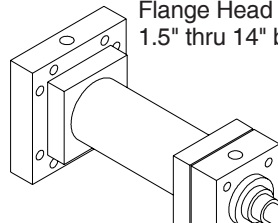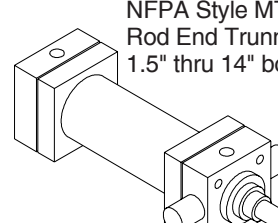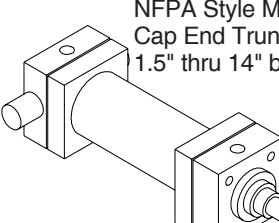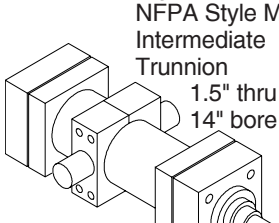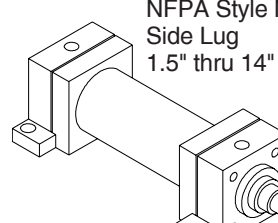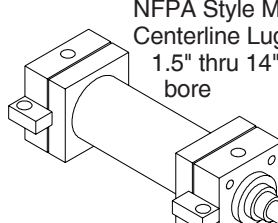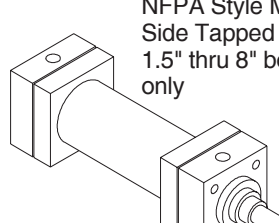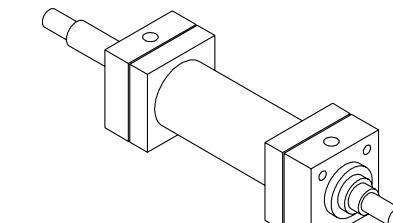 <p>Style BB NFPA Style MP1 Fixed Clevis 1.5" thru 14" bore</p> <p>Page 10 Page 20</p>	 <p>Style BE NFPA Style MP3 Pivot Eye 1.5" thru 14" bore</p> <p>Page 10 Page 20</p>	 <p>Style SB NFPA Style MPU3 Self-Aligning Eye 1.5" thru 6" bore</p> <p>Page 10</p>	 <p>Style JJ NFPA Style ME5 Flange Head 1.5" thru 14" bore</p> <p>Page 6 Page 16</p>
 <p>Style HH NFPA Style ME6 Flange Head 1.5" thru 14" bore</p> <p>Page 6 Page 16</p>	 <p>Style JB Flange Head 1.5" thru 14" bore</p> <p>Page 6 Page 16</p>	 <p>Style HB Flange Head 1.5" thru 14" bore</p> <p>Page 6 Page 16</p>	 <p>Style D NFPA Style MT1 Rod End Trunnion 1.5" thru 14" bore</p> <p>Page 12 Page 22</p>
 <p>Style DB NFPA Style MT2 Cap End Trunnion 1.5" thru 14" bore</p> <p>Page 12 Page 22</p>	 <p>Style DD NFPA Style MT4 Intermediate Trunnion 1.5" thru 14" bore</p> <p>Page 12 Page 22</p>	 <p>Style C NFPA Style MS2 Side Lug 1.5" thru 14" bore</p> <p>Page 8 Page 18</p>	 <p>Style E NFPA Style MS3 Centerline Lugs 1.5" thru 14" bore</p> <p>Page 8 Page 18</p>
 <p>Style F NFPA Style MS4 Side Tapped 1.5" thru 8" bore only</p> <p>Page 8</p>	 <p>Style KTB NFPA Style MD Double Rod Cylinder 1.5" thru 14" bore only</p> <p>Page 14</p>		



Rod Head Flange and Cap Head Flange Mounting Styles

Rod Head Flange

Style JJ

NFPA Style ME5



1.5" thru 8" Bore

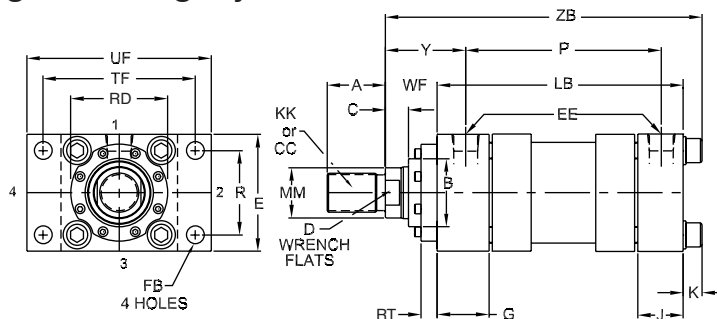

Rod Head Flange

Style JB

1.5" thru 8" Bore

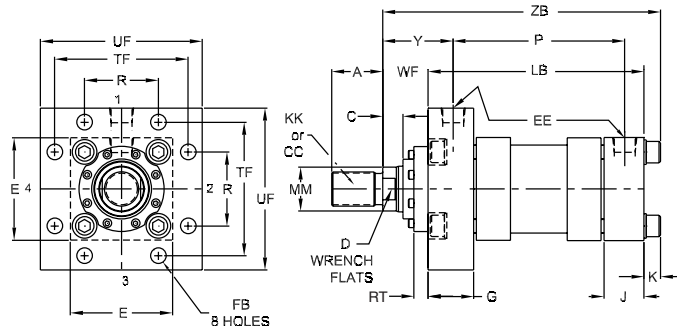
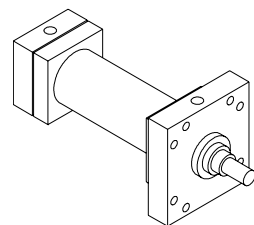


Cap Head Flange

Style HH

NFPA Style ME6



1.5" thru 8" Bore

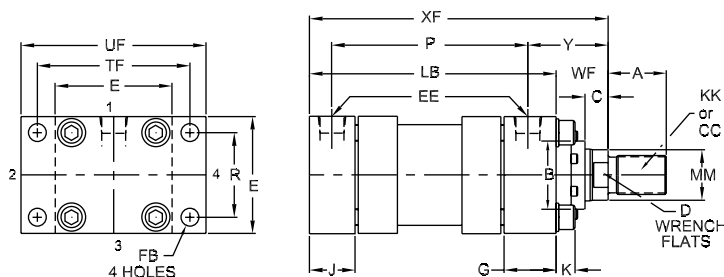

Cap Head Flange

Style HB


1.5" thru 8" Bore

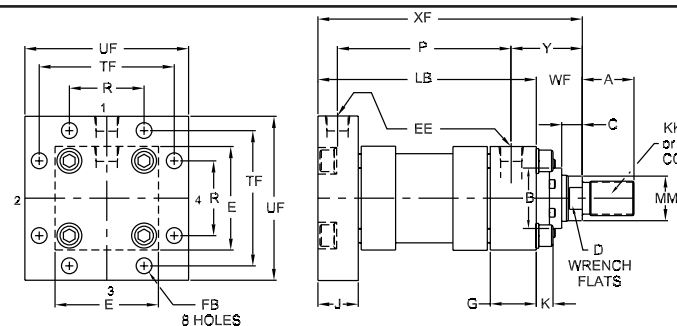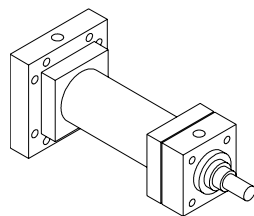

Rod End Dimensions


Style 4

Standard Male Thread




Style 8

Oversize Male Thread

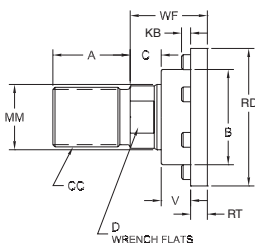


Style 9

Female Thread

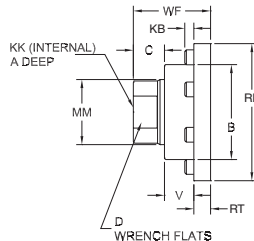

Style 55

Split Coupler



See Page 26 for dimensional data.

Style 3

"Specials"

Thread Style 3 Special thread, extension, rod eye, blank, etc., are also available.

To order, specify "Style 3" and give desired dimensions for CC or KK, A and WF. If otherwise special, supply dimensioned sketch.

Dimensions**Heavy Duty Mill Hydraulic Cylinder
Series MH****Envelope and Mounting Dimensions**

BORE	E	EE		FB	G	J	K	R	TF	UF	Add Stroke		Minimum Stroke
		SAE	NPTF								LB	P	
1½	2½	#8	½	7/16	1¾	1½	.38	1.63	37/16	4¼	4⅝	27/8	1.63
2	3	#8	½	9/16	1¾	1½	.50	2.05	4⅛	5⅛	4⅝	27/8	1.63
2½	3½	#8	½	9/16	1¾	1½	.50	2.55	4⅝	5⅝	4¾	3	1.50
3¼	4½	#12	¾	11/16	2	1¾	.63	3.25	57/8	7⅛	5½	3½	1.75
4	5	#12	¾	11/16	2	1¾	.63	3.82	6⅜	7⅝	5¾	3¾	1.50
5	6½	#12	¾	15/16	2	1¾	.88	4.95	83/16	9¾	6¼	4¼	1.50
6	7½	#16	1	11/16	2¼	2¼	1.00	5.73	97/16	11¼	7⅜	47/8	2.38
7	8½	#20	1¼	13/16	2¾	2¾	1.13	6.58	105/8	125/8	8½	5½	3.25
8	9½	#24	1½	15/16	3	3	1.25	7.50	1113/16	14	9½	6¼	4.75

Dimensions Affected by Rod Size

BORE	Rod No.	MM Rod Size	Thread		A	B	RD	C	D	RT	V	KB	WF	Y	Add Stroke	
			Style 4 & 9	Style 8											XF	ZB
			KK	CC												
1½	1*	5/8	7/16 - 20	½ - 20	¾	1.124	115/16	3/8	½	3/8	¼	3/16	1	2	55/8	61/8
	2	1	¾ - 16	7/8 - 14	1⅛	1.499	23/8	½	7/8	3/8	½	3/16	13/8	23/8	6	6½
2	1*	1	¾ - 16	7/8 - 14	1⅛	1.499	23/8	½	7/8	3/8	½	3/16	13/8	23/8	6	65/8
	2	13/8	1 - 14	1¼ - 12	15/8	1.999	27/8	5/8	1⅛	3/8	5/8	3/16	15/8	25/8	6¼	67/8
2½	1*	1	¾ - 16	7/8 - 14	1⅛	1.499	23/8	½	7/8	3/8	½	3/16	13/8	23/8	61/8	6¾
	3	13/8	1 - 14	1¼ - 12	15/8	1.999	27/8	5/8	1⅛	3/8	5/8	3/16	15/8	25/8	63/8	7
	2	1¾	1¼ - 12	1½ - 12	2	2.374	3½	¾	1½	5/8	½	3/16	17/8	27/8	65/8	7¼
3¼	1*	13/8	1 - 14	1¼ - 12	15/8	1.999	27/8	5/8	1⅛	3/8	5/8	3/16	15/8	23/4	71/8	77/8
	3	1¾	1¼ - 12	1½ - 12	2	2.374	3½	¾	1½	5/8	½	3/16	17/8	3	73/8	81/8
	2	2	1½ - 12	1¾ - 12	2¼	2.624	3¾	7/8	111/16	5/8	½	¼	2	31/8	7½	8¼
4	1*	1¾	1¼ - 12	1½ - 12	2	2.374	3½	¾	1½	5/8	½	3/16	17/8	3	75/8	83/8
	3	2	1½ - 12	1¾ - 12	2¼	2.624	3¾	7/8	111/16	5/8	½	¼	2	31/8	7¾	8½
	2	2½	17/8 - 12	2¼ - 12	3	3.124	4¼	1	21/16	5/8	5/8	¼	2¼	33/8	8	8¾
5	1*	2	1½ - 12	1¾ - 12	2¼	2.624	3¾	7/8	111/16	5/8	½	¼	2	31/8	8¼	9¼
	3	2½	17/8 - 12	2¼ - 12	3	3.124	4¼	1	21/16	5/8	5/8	¼	2¼	33/8	8½	9½
	4	3	2¼ - 12	2¾ - 12	3½	3.749	57/16	1	25/8	15/16	5/16	—	2¼	33/8	8½	9½
	2	3½	2½ - 12	3¼ - 12	3½	4.249	515/16	1	3	15/16	5/16	—	2¼	33/8	8½	9½
6	1*	2½	17/8 - 12	2¼ - 12	3	3.124	4¼	1	21/16	5/8	5/8	¼	2¼	3½	95/8	10¾
	3	3	2¼ - 12	2¾ - 12	3½	3.749	57/8	1	25/8	15/16	5/16	—	2¼	3½	95/8	10¾
	4	3½	2½ - 12	3¼ - 12	3½	4.249	515/16	1	3	15/16	5/16	—	2¼	3½	95/8	10¾
	2	4	3 - 12	3¾ - 12	4	4.749	65/16	1	33/8	15/16	5/16	—	2¼	3½	95/8	10¾
7	1*	3	2¼ - 12	2¾ - 12	3½	3.749	57/16	1	25/8	15/16	5/16	—	2¼	3¾	10¾	12
	3	3½	2½ - 12	3¼ - 12	3½	4.249	515/16	1	3	15/16	5/16	—	2¼	3¾	10¾	12
	4	4	3 - 12	3¾ - 12	4	4.749	65/16	1	33/8	15/16	5/16	—	2¼	3¾	10¾	12
	5	4½	3¼ - 12	4¼ - 12	4½	5.249	615/16	1	†	15/16	5/16	—	2¼	3¾	10¾	12
	2	5	3½ - 12	4¾ - 12	5	5.749	77/16	1	†	15/16	5/16	—	2¼	3¾	10¾	12
8	1*	3½	2½ - 12	3¼ - 12	3½	4.249	515/16	1	3	15/16	5/16	—	2¼	37/8	11¾	13¼
	3	4	3 - 12	3¾ - 12	4	4.749	65/16	1	33/8	15/16	5/16	—	2¼	37/8	11¾	13¼
	4	4½	3¼ - 12	4¼ - 12	4½	5.249	615/16	1	†	15/16	5/16	—	2¼	37/8	11¾	13¼
	5	5	3½ - 12	4¾ - 12	5	5.749	77/16	1	†	15/16	5/16	—	2¼	37/8	11¾	13¼
	2	5½	4 - 12	5¼ - 12	5½	6.249	715/16	1	†	15/16	5/16	—	2¼	37/8	11¾	13¼

*Indicates standard rod for bore size.

†On 4½" rods and above, (4) .515 dia. spanner wrench holes will be provided instead of wrench flats.



Side Lug, Center Lug and Side Tapped Mounting Styles

Side Lug

Style C

NFPA Style MS2

1.5" thru 8" Bore

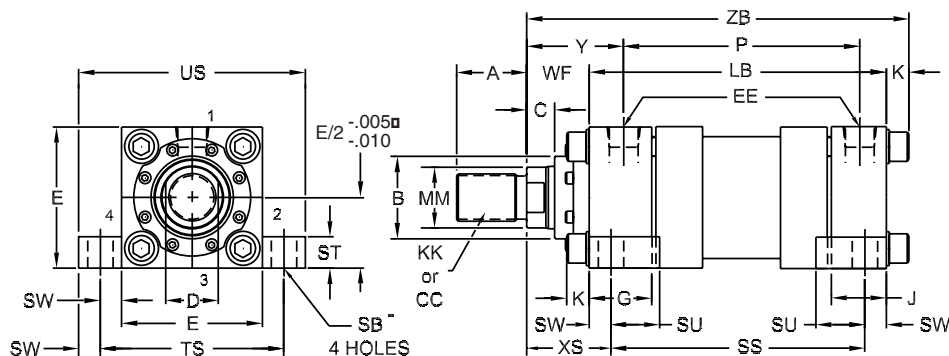
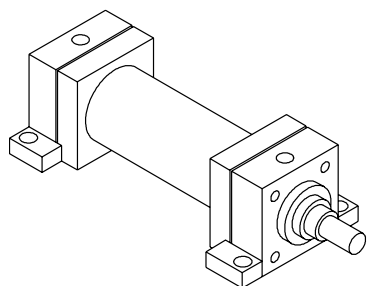


Side Tapped

Style F

NFPA Style MS4

1.5" thru 8" Bore

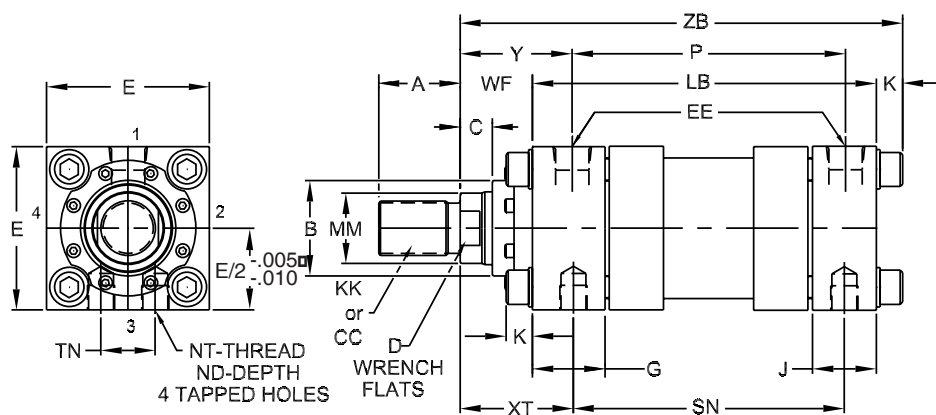
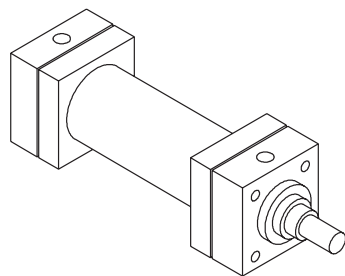


Center Lug

Style E

NFPA Style MS3


1.5" thru 8" Bore

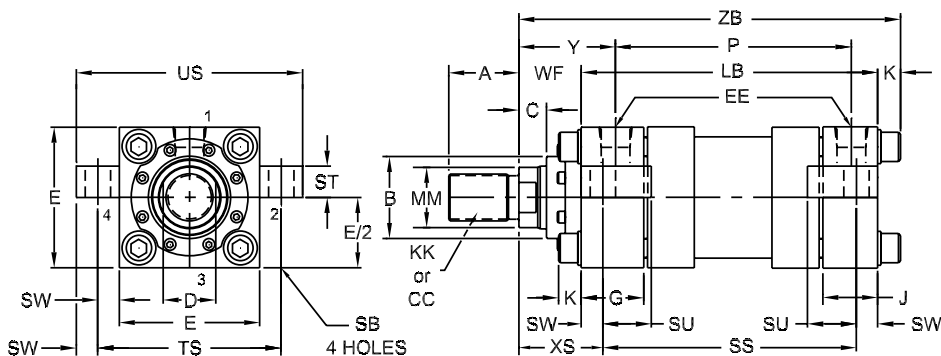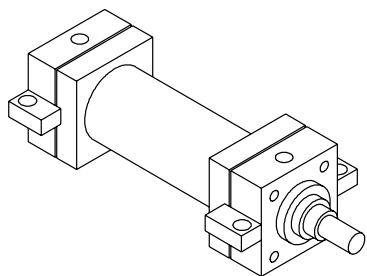

Rod End Dimensions


Style 4

Standard Male Thread




Style 8

Oversize Male Thread

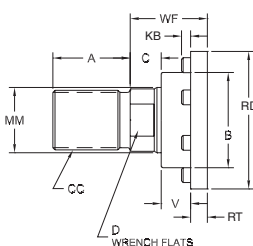


Style 9

Female Thread

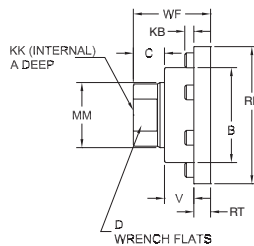

Style 55

Split Coupler



See Page 26 for dimensional data.

Style 3

"Specials"

Thread Style 3 Special thread, extension, rod eye, blank, etc., are also available.

To order, specify "Style 3" and give desired dimensions for CC or KK, A and WF. If otherwise special, supply dimensioned sketch.

Dimensions**Heavy Duty Mill Hydraulic Cylinder
Series MH****Envelope and Mounting Dimensions**

BORE	E	EE		G	J	K	ND	NT	SB	ST	SU	SW
		SAE	NPTF									
1 ^{1/2}	2 ^{1/2}	#8	1/2	1 ^{3/4}	1 ^{1/2}	.38	3/8	3/8 - 16	7/16	1/2	15/16	3/8
2	3	#8	1/2	1 ^{3/4}	1 ^{1/2}	.50	7/16	1/2 - 13	9/16	3/4	1 ^{1/4}	1/2
2 ^{1/2}	3 ^{1/2}	#8	1/2	1 ^{3/4}	1 ^{1/2}	.50	1/2	5/8 - 11	13/16	1	1 ^{9/16}	11/16
3 ^{1/4}	4 ^{1/2}	#12	3/4	2	1 ^{3/4}	.63	11/16	3/4 - 10	13/16	1	1 ^{9/16}	11/16
4	5	#12	3/4	2	1 ^{3/4}	.63	11/16	1 - 8	1 ^{1/16}	1 ^{1/4}	2	7/8
5	6 ^{1/2}	#12	3/4	2	1 ^{3/4}	.88	1	1 - 8	1 ^{1/16}	1 ^{1/4}	2	7/8
6	7 ^{1/2}	#16	1	2 ^{1/4}	2 ^{1/4}	1.00	1 ^{1/4}	1 ^{1/4} - 7	1 ^{5/16}	1 ^{1/2}	2 ^{1/2}	1 ^{1/8}
7	8 ^{1/2}	#20	1 ^{1/4}	2 ^{3/4}	2 ^{3/4}	1.13	1 ^{1/8}	1 ^{1/2} - 6	1 ^{9/16}	1 ^{3/4}	2 ^{7/8}	1 ^{3/8}
8	9 ^{1/2}	#24	1 ^{1/2}	3	3	1.25	1 ^{1/2}	1 ^{1/2} - 6	1 ^{9/16}	1 ^{3/4}	2 ^{7/8}	1 ^{3/8}

Envelope and Mounting Dimensions—Continued

BORE	TN	TS	US	Add Stroke				MIN STROKE
				LB	P	SN	SS	
1 ^{1/2}	3/4	3 ^{1/4}	4	4 ^{5/8}	2 ^{7/8}	2 ^{7/8}	3 ^{7/8}	1.63
2	15/16	4	5	4 ^{5/8}	2 ^{7/8}	2 ^{7/8}	3 ^{5/8}	1.63
2 ^{1/2}	1 ^{5/16}	4 ^{7/8}	6 ^{1/4}	4 ^{3/4}	3	3	3 ^{3/8}	1.50
3 ^{1/4}	1 ^{1/2}	5 ^{7/8}	7 ^{1/4}	5 ^{1/2}	3 ^{1/2}	3 ^{1/2}	4 ^{1/8}	1.75
4	2 ^{1/16}	6 ^{3/4}	8 ^{1/2}	5 ^{3/4}	3 ^{3/4}	3 ^{3/4}	4	1.50
5	2 ^{15/16}	8 ^{1/4}	10	6 ^{1/4}	4 ^{1/4}	4 ^{1/4}	4 ^{1/2}	1.50
6	3 ^{5/16}	9 ^{3/4}	12	7 ^{3/8}	4 ^{7/8}	5 ^{1/8}	5 ^{1/8}	2.38
7	3 ^{3/4}	11 ^{1/4}	14	8 ^{1/2}	5 ^{1/2}	5 ^{7/8}	5 ^{3/4}	3.25
8	4 ^{1/4}	12 ^{1/4}	15	9 ^{1/2}	6 ^{1/4}	6 ^{5/8}	6 ^{3/4}	4.75

Dimensions Affected by Rod Size

BORE	Rod No.	MM Rod Size	Thread		A	B	RD	C	D	RT	V	KB	WF	XS	XT	Y	Add Stroke
			Style 4 & 9	Style 8													
			KK	CC													ZB
1 ^{1/2}	1*	5/8	7/16 - 20	1/2 - 20	3/4	1.124	1 ^{15/16}	3/8	1/2	3/8	1/4	3/16	1	1 ^{3/8}	1 ^{5/16}	2	6 ^{1/8}
	2	1	3/4 - 16	7/8 - 14	1 ^{1/8}	1.499	2 ^{3/8}	1/2	7/8	3/8	1/2	3/16	1 ^{3/8}	1 ^{3/4}	2 ^{5/16}	2 ^{3/8}	6 ^{1/2}
2	1*	1	3/4 - 16	7/8 - 14	1 ^{1/8}	1.499	2 ^{3/8}	1/2	7/8	3/8	1/2	3/16	1 ^{3/8}	1 ^{7/8}	2 ^{5/16}	2 ^{3/8}	6 ^{5/8}
	2	1 ^{3/8}	1 - 14	1 ^{1/4} - 12	1 ^{5/8}	1.999	2 ^{7/8}	5/8	1 ^{1/8}	3/8	5/8	3/16	1 ^{5/8}	2 ^{1/8}	2 ^{9/16}	2 ^{5/8}	6 ^{7/8}
2 ^{1/2}	1*	1	3/4 - 16	7/8 - 14	1 ^{1/8}	1.499	2 ^{3/8}	1/2	7/8	3/8	1/2	3/16	1 ^{3/8}	2 ^{1/16}	2 ^{5/16}	2 ^{3/8}	6 ^{3/4}
	3	1 ^{3/8}	1 - 14	1 ^{1/4} - 12	1 ^{5/8}	1.999	2 ^{7/8}	5/8	1 ^{1/8}	3/8	5/8	3/16	1 ^{5/8}	2 ^{5/16}	2 ^{9/16}	2 ^{5/8}	7
	2	1 ^{3/4}	1 ^{1/4} - 12	1 ^{1/2} - 12	2	2.374	3 ^{1/2}	3/4	1 ^{1/2}	5/8	1/2	3/16	1 ^{7/8}	2 ^{9/16}	2 ^{13/16}	2 ^{7/8}	7 ^{1/4}
3 ^{1/4}	1*	1 ^{3/8}	1 - 14	1 ^{1/4} - 12	1 ^{5/8}	1.999	2 ^{7/8}	5/8	1 ^{1/8}	3/8	5/8	3/16	1 ^{5/8}	2 ^{5/16}	2 ^{9/16}	2 ^{3/4}	7 ^{7/8}
	3	1 ^{3/4}	1 ^{1/4} - 12	1 ^{1/2} - 12	2	2.374	3 ^{1/2}	3/4	1 ^{1/2}	5/8	1/2	3/16	1 ^{7/8}	2 ^{9/16}	2 ^{13/16}	3	8 ^{1/8}
	2	2	1 ^{1/2} - 12	1 ^{3/4} - 12	2 ^{1/4}	2.624	3 ^{3/4}	7/8	1 ^{11/16}	5/8	1/2	1/4	2	2 ^{11/16}	2 ^{15/16}	3 ^{1/8}	8 ^{1/4}
4	1*	1 ^{3/4}	1 ^{1/4} - 12	1 ^{1/2} - 12	2	2.374	3 ^{1/2}	3/4	1 ^{1/2}	5/8	1/2	3/16	1 ^{7/8}	2 ^{3/4}	2 ^{15/16}	3	8 ^{3/8}
	3	2	1 ^{1/2} - 12	1 ^{3/4} - 12	2 ^{1/4}	2.624	3 ^{3/4}	7/8	1 ^{11/16}	5/8	1/2	1/4	2	2 ^{7/8}	3 ^{1/16}	3 ^{1/8}	8 ^{1/2}
	2	2 ^{1/2}	1 ^{7/8} - 12	2 ^{1/4} - 12	3	3.124	4 ^{1/4}	1	2 ^{1/16}	5/8	5/8	1/4	2 ^{1/4}	3 ^{1/8}	3 ^{5/16}	3 ^{3/8}	8 ^{3/4}
5	1*	2	1 ^{1/2} - 12	1 ^{3/4} - 12	2 ^{1/4}	2.624	3 ^{3/4}	7/8	1 ^{11/16}	5/8	1/2	1/4	2	2 ^{7/8}	3	3 ^{1/8}	9 ^{1/4}
	3	2 ^{1/2}	1 ^{7/8} - 12	2 ^{1/4} - 12	3	3.124	4 ^{1/4}	1	2 ^{1/16}	5/8	5/8	1/4	2 ^{1/4}	3 ^{1/8}	3 ^{1/4}	3 ^{3/8}	9 ^{1/2}
	4	3	2 ^{1/4} - 12	2 ^{3/4} - 12	3 ^{1/2}	3.749	5 ^{7/16}	1	2 ^{5/8}	1 ^{5/16}	5/16	—	2 ^{1/4}	3 ^{1/8}	3 ^{1/4}	3 ^{3/8}	9 ^{1/2}
	2	3 ^{1/2}	2 ^{1/2} - 12	3 ^{1/4} - 12	3 ^{1/2}	4.249	5 ^{15/16}	1	3	1 ^{5/16}	5/16	—	2 ^{1/4}	3 ^{1/8}	3 ^{1/4}	3 ^{3/8}	9 ^{1/2}
6	1*	2 ^{1/2}	1 ^{7/8} - 12	2 ^{1/4} - 12	3	3.124	4 ^{1/4}	1	2 ^{1/16}	5/8	5/8	1/4	2 ^{1/4}	3 ^{3/8}	3 ^{5/16}	3 ^{1/2}	10 ^{3/4}
	3	3	2 ^{1/4} - 12	2 ^{3/4} - 12	3 ^{1/2}	3.749	5 ^{7/8}	1	2 ^{5/8}	1 ^{5/16}	5/16	—	2 ^{1/4}	3 ^{3/8}	3 ^{5/16}	3 ^{1/2}	10 ^{3/4}
	4	3 ^{1/2}	2 ^{1/2} - 12	3 ^{1/4} - 12	3 ^{1/2}	4.249	5 ^{15/16}	1	3	1 ^{5/16}	5/16	—	2 ^{1/4}	3 ^{3/8}	3 ^{5/16}	3 ^{1/2}	10 ^{3/4}
	2	4	3 - 12	3 ^{3/4} - 12	4	4.749	6 ^{5/16}	1	3 ^{3/8}	1 ^{5/16}	5/16	—	2 ^{1/4}	3 ^{3/8}	3 ^{5/16}	3 ^{1/2}	10 ^{3/4}
7	1*	3	2 ^{1/4} - 12	2 ^{3/4} - 12	3 ^{1/2}	3.749	5 ^{7/16}	1	2 ^{5/8}	1 ^{5/16}	5/16	—	2 ^{1/4}	3 ^{5/8}	3 ^{13/16}	3 ^{3/4}	12
	3	3 ^{1/2}	2 ^{1/2} - 12	3 ^{1/4} - 12	3 ^{1/2}	4.249	5 ^{15/16}	1	3	1 ^{5/16}	5/16	—	2 ^{1/4}	3 ^{5/8}	3 ^{13/16}	3 ^{3/4}	12
	4	4	3 - 12	3 ^{3/4} - 12	4	4.749	6 ^{5/16}	1	3 ^{3/8}	1 ^{5/16}	5/16	—	2 ^{1/4}	3 ^{5/8}	3 ^{13/16}	3 ^{3/4}	12
	5	4 ^{1/2}	3 ^{1/4} - 12	4 ^{1/4} - 12	4 ^{1/2}	5.249	6 ^{15/16}	1	†	1 ^{5/16}	5/16	—	2 ^{1/4}	3 ^{5/8}	3 ^{13/16}	3 ^{3/4}	12
	2	5	3 ^{1/2} - 12	4 ^{3/4} - 12	5	5.749	7 ^{7/16}	1	†	1 ^{5/16}	5/16	—	2 ^{1/4}	3 ^{5/8}	3 ^{13/16}	3 ^{3/4}	12
8	1*	3 ^{1/2}	2 ^{1/2} - 12	3 ^{1/4} - 12	3 ^{1/2}	4.249	5 ^{15/16}	1	3	1 ^{5/16}	5/16	—	2 ^{1/4}	3 ^{5/8}	3 ^{15/16}	3 ^{7/8}	13 ^{1/4}
	3	4	3 - 12	3 ^{3/4} - 12	4	4.749	6 ^{5/16}	1	3 ^{3/8}	1 ^{5/16}	5/16	—	2 ^{1/4}	3 ^{5/8}	3 ^{15/16}	3 ^{7/8}	13 ^{1/4}
	4	4 ^{1/2}	3 ^{1/4} - 12	4 ^{1/4} - 12	4 ^{1/2}	5.249	6 ^{15/16}	1	†	1 ^{5/16}	5/16	—	2 ^{1/4}	3 ^{5/8}	3 ^{15/16}	3 ^{7/8}	13 ^{1/4}
	5	5	3 ^{1/2} - 12	4 ^{3/4} - 12	5	5.749	7 ^{7/16}	1	†	1 ^{5/16}	5/16	—	2 ^{1/4}	3 ^{5/8}	3 ^{15/16}	3 ^{7/8}	13 ^{1/4}
	2	5 ^{1/2}	4 - 12	5 ^{1/4} - 12	5 ^{1/2}	6.249	7 ^{15/16}	1	†	1 ^{5/16}	5/16	—	2 ^{1/4}	3 ^{5/8}	3 ^{15/16}	3 ^{7/8}	13 ^{1/4}

*Indicates standard rod for bore size.

†On 4^{1/2}" rods and above, (4) .515 dia. spanner wrench holes will be provided instead of wrench flats.



Fixed Clevis, Pivot Eye and Self Aligning Eye Mounting Styles

Fixed Clevis

Style BB

NFPA Style MP1

1.5" thru 8" Bore

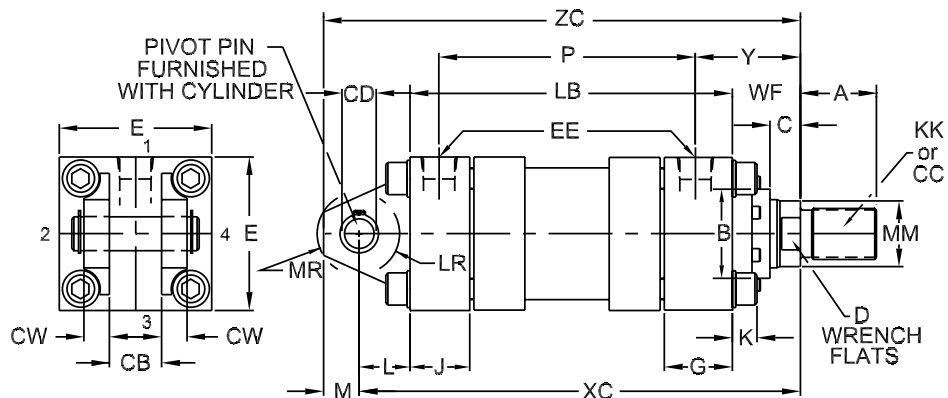
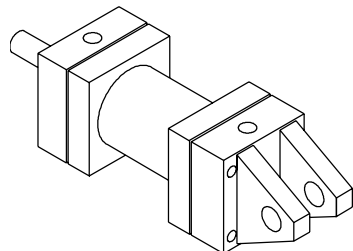


Self Aligning Eye

Style SB

NFPA Style MPU3

1.5" thru 6" Bore

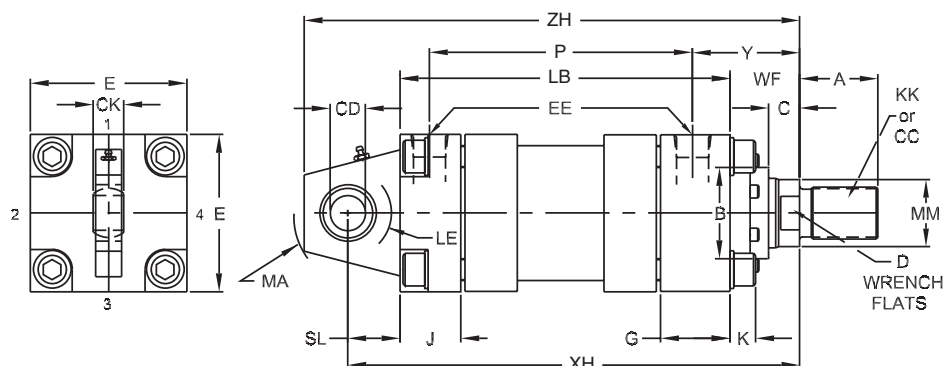
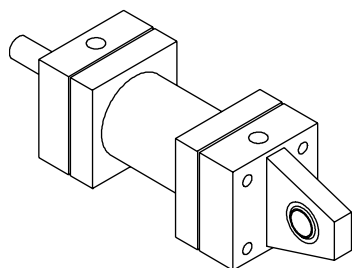


Pivot Eye

Style BE

NFPA Style MP3


1.5" thru 8" Bore

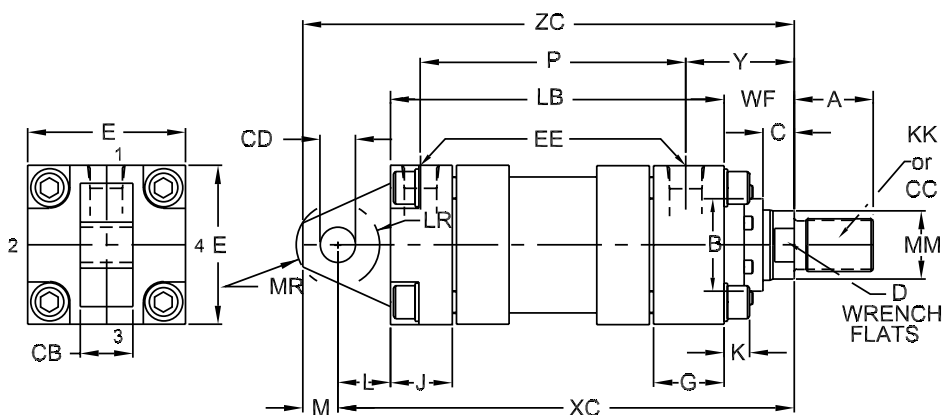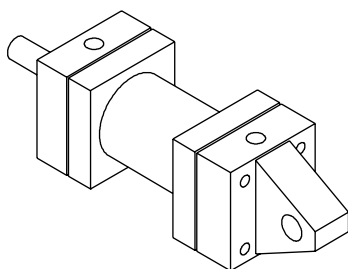

Rod End Dimensions


Style 4

Standard Male Thread




Style 8

Oversize Male Thread

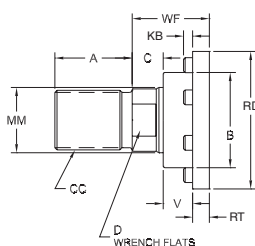


Style 9

Female Thread

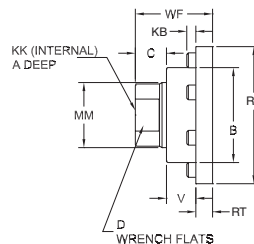

Style 55

Split Coupler



See Page 26 for dimensional data.

Style 3

"Specials"
Thread Style 3
Special thread,
extension, rod eye,
blank, etc., are also
available.

To order, specify
"Style 3" and give
desired dimensions
for CC or KK, A and
WF. If otherwise
special, supply
dimensioned sketch.

Dimensions**Heavy Duty Mill Hydraulic Cylinder
Series MH****Envelope and Mounting Dimensions**

BORE	CB	CD	EX	CW	E	EE		G	J	K	L	LE	LR
						SAE	NPTF						
1½	¾	0.501	7/16	½	2½	#8	½	1¾	1½	.38	¾	7/8	9/16
2	1¼	0.751	21/32	5/8	3	#8	½	1¾	1½	.50	1¼	7/8	1
2½	1¼	0.751	21/32	5/8	3½	#8	½	1¾	1½	.50	1¼	7/8	15/16
3¼	1½	1.001	7/8	¾	4½	#12	¾	2	1¾	.63	1½	1½	1¼
4	2	1.376	13/16	1	5	#12	¾	2	1¾	.63	2½	1½	1¾
5	2½	1.751	17/32	1¼	6½	#12	¾	2	1¾	.88	2¼	15/16	2½
6	2½	2.001	1¾	1¼	7½	#16	1	2¼	2¼	1.00	2½	23/16	25/16
7	3	2.501	—	1½	8½	#20	1¼	2¾	2¾	1.13	3	—	2¾
8	3	3.001	—	1½	9½	#24	1½	3	3	1.25	3¼	—	3¼

Envelope and Mounting Dimensions—Continued

BORE	M	MA	MR	SL	Add Stroke		MIN STROKE
					LB	P	
1½	½	1¼	5/8	¾	45/8	27/8	1.63
2	¾	1¼	15/16	1¼	45/8	27/8	1.63
2½	¾	1¼	15/16	1¼	4¾	3	1.50
3¼	1	1½	13/16	1½	5½	3½	1.75
4	13/8	1¾	15/8	2½	5¾	3¾	1.50
5	1¾	2¼	2½	2¼	6¼	4¼	1.50
6	2	2¾	23/8	2½	73/8	47/8	2.38
7	2½	—	27/8	—	8½	5½	3.25
8	2¾	—	3½	—	9½	6¼	4.75

Dimensions Affected by Rod Size

BORE	Rod No.	MM Rod Size	Thread**		A	B	RD	C	D	RT	V	KB	WF	Y	Add Stroke			
			Style 4 & 9	Style 8											XC	XH	ZC	ZH
			KK	CC														
1½	1*	5/8	7/16 - 20	½ - 20	¾	1.124	115/16	3/8	½	3/8	¼	3/16	1	2	63/8	63/8	67/8	71/8
	2	1	¾ - 16	7/8 - 14	1½	1.499	23/8	½	7/8	3/8	½	3/16	13/8	23/8	63/4	63/4	7¼	7½
2	1*	1	¾ - 16	7/8 - 14	1½	1.499	23/8	½	7/8	3/8	½	3/16	13/8	23/8	7¼	7¼	8	8¼
	2	13/8	1 - 14	1¼ - 12	15/8	1.999	27/8	5/8	1½	3/8	5/8	3/16	15/8	25/8	7½	7½	8¼	8½
2½	1*	1	¾ - 16	7/8 - 14	1½	1.499	23/8	½	7/8	3/8	½	3/16	13/8	23/8	73/8	73/8	8½	83/8
	3	13/8	1 - 14	1¼ - 12	15/8	1.999	27/8	5/8	1½	3/8	5/8	3/16	15/8	25/8	75/8	75/8	83/8	85/8
3¼	1*	13/8	1 - 14	1¼ - 12	15/8	1.999	27/8	5/8	1½	3/8	5/8	3/16	15/8	23/4	85/8	85/8	95/8	97/8
	3	1¾	1¼ - 12	1½ - 12	2	2.374	3½	¾	1½	5/8	1½	3/16	17/8	27/8	77/8	77/8	85/8	87/8
4	1*	1¾	1¼ - 12	1½ - 12	2	2.374	3½	7/8	111/16	5/8	1½	3/16	17/8	3	93/4	93/4	111/8	115/8
	3	2	1½ - 12	1¾ - 12	2¼	2.624	3¾	7/8	111/16	5/8	1½	¼	2	31/8	97/8	97/8	11¼	113/4
5	1*	2	1½ - 12	1¾ - 12	2¼	2.624	3¾	7/8	111/16	5/8	1½	¼	2	31/8	101/8	101/8	11½	12
	2	2½	17/8 - 12	2¼ - 12	3	3.124	4¼	1	21/16	5/8	5/8	1¼	2¼	33/8	101/8	101/8	11½	12
6	1*	2	1½ - 12	1¾ - 12	2¼	2.624	3¾	7/8	111/16	5/8	1½	¼	2	31/8	101/2	101/2	121/8	13
	3	2½	17/8 - 12	2¼ - 12	3	3.124	4¼	1	21/16	5/8	5/8	1¼	2¼	33/8	103/4	103/4	12½	13¼
7	1*	3	2¼ - 12	2¾ - 12	3½	3.749	57/16	1	25/8	15/16	5/16	—	2¼	33/8	103/4	103/4	12½	13¼
	2	3½	2½ - 12	3¼ - 12	3½	4.249	515/16	1	3	15/16	5/16	—	2¼	33/8	103/4	103/4	12½	13¼
8	1*	2½	17/8 - 12	2¼ - 12	3	3.124	4¼	1	21/16	5/8	5/8	1¼	2¼	31/2	121/8	121/8	141/8	145/8
	3	3	2¼ - 12	2¾ - 12	3½	3.749	57/8	1	25/8	15/16	5/16	—	2¼	31/2	121/8	121/8	141/8	145/8
9	1*	3	2¼ - 12	2¾ - 12	3½	3.749	57/16	1	25/8	15/16	5/16	—	2¼	31/2	121/8	121/8	141/8	145/8
	2	4	3 - 12	3¾ - 12	4	4.749	65/16	1	33/8	15/16	5/16	—	2¼	31/2	121/8	121/8	141/8	145/8
10	1*	3	2¼ - 12	2¾ - 12	3½	3.749	57/16	1	25/8	15/16	5/16	—	2¼	3¾	133/4	—	16¼	—
	3	3½	2½ - 12	3¼ - 12	3½	4.249	515/16	1	3	15/16	5/16	—	2¼	3¾	133/4	—	16¼	—
11	1*	4	3 - 12	3¾ - 12	4	4.749	65/16	1	33/8	15/16	5/16	—	2¼	3¾	133/4	—	16¼	—
	2	5	3½ - 12	4¾ - 12	5	5.749	77/16	1	†	15/16	5/16	—	2¼	3¾	133/4	—	16¼	—
12	1*	3½	2½ - 12	3¼ - 12	3½	4.249	515/16	1	3	15/16	5/16	—	2¼	37/8	15	—	17¾	—
	3	4	3 - 12	3¾ - 12	4	4.749	65/16	1	33/8	15/16	5/16	—	2¼	37/8	15	—	17¾	—
13	1*	4	3½ - 12	4¾ - 12	5	5.749	77/16	1	†	15/16	5/16	—	2¼	37/8	15	—	17¾	—
	2	5½	4 - 12	5¼ - 12	5½	6.249	715/16	1	†	15/16	5/16	—	2¼	37/8	15	—	17¾	—

*Indicates standard rod for bore size.

†On 4½" rods and above, (4) .515 dia. spanner wrench holes will be provided instead of wrench flats.



**Please specify the appropriate female KK, A, and WF dimension when a spherical rod eye accessory is purchased.



Trunnion Mounting Styles


Rod End Trunnion Style D

NFPA Style MT1
 1.5" thru 8" Bore

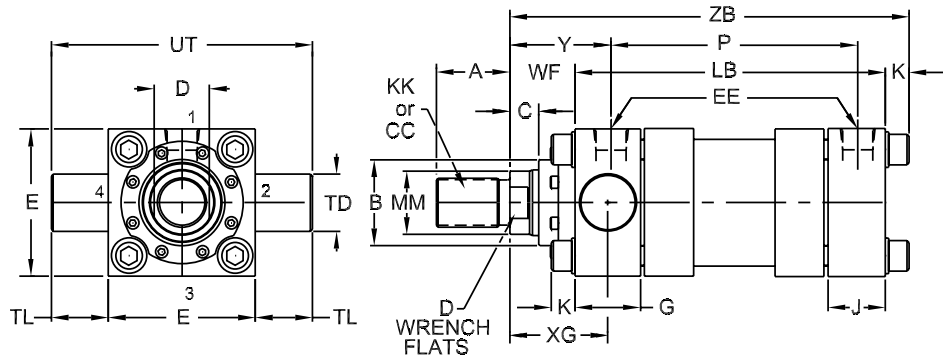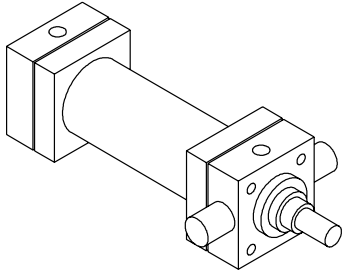

Intermediate Trunnion Style DD



NFPA Style MT4
 1.5" thru 8" Bore

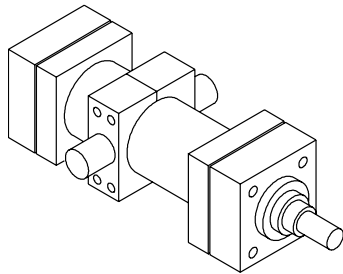

For all intermediate trunnion applications,
 please consult factory for appropriate design
 and dimensions.


Cap End Trunnion Style DB

NFPA Style MT2
 1.5" thru 8" Bore

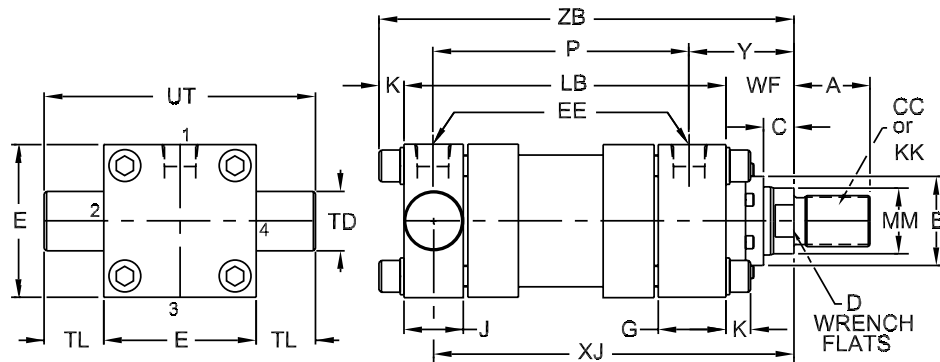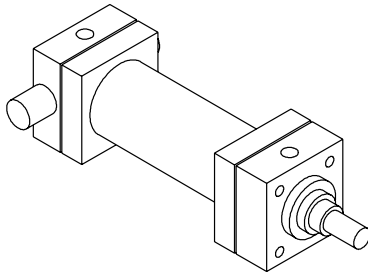


Rod End Dimensions


Style 4 Standard Male Thread




Style 8 Oversize Male Thread

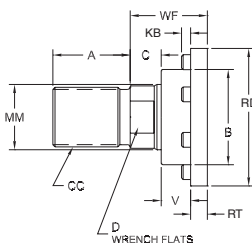

Style 9 Female Thread

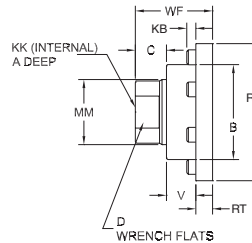

Style 55 Split Coupler



See Page 26 for
 dimensional data.

**Style 3
 "Specials"**
 Thread Style 3
 Special thread,
 extension, rod eye,
 blank, etc., are also
 available.

To order, specify
 "Style 3" and give
 desired dimensions
 for CC or KK, A and
 WF. If otherwise
 special, supply
 dimensioned sketch.

Dimensions**Heavy Duty Mill Hydraulic Cylinder
Series MH****Envelope and Mounting Dimensions**

BORE	BD	E	EE		G	J	K	TD	TL	UT
			SAE	NPTF						
1½	1¼	2½	#8	½	1¾	1½	.38	1.000	1	4½
2	1½	3	#8	½	1¾	1½	.50	1.375	1⅜	5¾
2½	1½	3½	#8	½	1¾	1½	.50	1.375	1⅜	6¼
3¼	2	4½	#12	¾	2	1¾	.63	1.750	1¾	8
4	2	5	#12	¾	2	1¾	.63	1.750	1¾	8½
5	2	6½	#12	¾	2	1¾	.88	1.750	1¾	10
6	3	7½	#16	1	2¼	2¼	1.00	2.000	2	11½
7	3	8½	#20	1¼	2¾	2¾	1.13	2.500	2½	13½
8	3½	9½	#24	1½	3	3	1.25	3.000	3	15½

Envelope and Mounting Dimensions—Continued

BORE	Add Stroke		Minimum Stroke D & DB
	LB	P	
1½	4⅝	2⅞	1.63
2	4⅝	2⅞	1.63
2½	4¾	3	1.50
3¼	5½	3½	1.75
4	5¾	3¾	1.50
5	6¼	4¼	1.50
6	7⅜	4⅞	2.38
7	8½	5½	3.25
8	9½	6¼	4.75

Dimensions Affected by Rod Size

BORE	Rod No.	MM Rod Size	Thread		A	B	RD	C	D	RT	V	KB	WF	XG	Y	Add Stroke	
			Style 4 & 9	Style 8												XJ	ZB
			KK	CC													
1½	1*	5/8	7/16 - 20	1/2 - 20	¾	1.124	1 ¹⁵ / ₁₆	3/8	1/2	3/8	1/4	3/16	1	1 ⁷ / ₈	2	4 ⁷ / ₈	6 ¹ / ₈
	2	1	¾ - 16	7/8 - 14	1⅞	1.499	2 ³ / ₈	1/2	7/8	3/8	1/2	3/16	1 ³ / ₈	2¼	2 ³ / ₈	5¼	6½
2	1*	1	¾ - 16	7/8 - 14	1⅞	1.499	2 ³ / ₈	1/2	7/8	3/8	1/2	3/16	1 ³ / ₈	2¼	2 ³ / ₈	5¼	6 ⁵ / ₈
	2	1 ³ / ₈	1 - 14	1¼ - 12	1 ⁵ / ₈	1.999	2 ⁷ / ₈	5/8	1⅞	3/8	5/8	3/16	1 ⁵ / ₈	2½	2 ⁵ / ₈	5½	6 ⁷ / ₈
2½	1*	1	¾ - 16	7/8 - 14	1⅞	1.499	2 ³ / ₈	1/2	7/8	3/8	1/2	3/16	1 ³ / ₈	2¼	2 ³ / ₈	5¾	6¾
	3	1 ³ / ₈	1 - 14	1¼ - 12	1 ⁵ / ₈	1.999	2 ⁷ / ₈	5/8	1⅞	3/8	5/8	3/16	1 ⁵ / ₈	2½	2 ⁵ / ₈	5 ⁵ / ₈	7
3¼	2	1¾	1¼ - 12	1½ - 12	2	2.374	3½	¾	1½	5/8	1½	3/16	1 ⁷ / ₈	2¾	2 ⁷ / ₈	5 ⁷ / ₈	7¼
	1*	1 ³ / ₈	1 - 14	1¼ - 12	1 ⁵ / ₈	1.999	2 ⁷ / ₈	5/8	1⅞	3/8	5/8	3/16	1 ⁵ / ₈	2 ⁵ / ₈	2¾	6¼	7 ⁷ / ₈
4	3	1¾	1¼ - 12	1½ - 12	2	2.374	3½	¾	1½	5/8	1½	3/16	1 ⁷ / ₈	2 ⁷ / ₈	3	6½	8 ¹ / ₈
	2	2	1½ - 12	1¾ - 12	2¼	2.624	3¾	7/8	1⅞	5/8	1½	¼	2	3	3 ¹ / ₈	6 ⁵ / ₈	8¼
5	1*	1¾	1¼ - 12	1½ - 12	2	2.624	3½	¾	1½	5/8	1½	3/16	1 ⁷ / ₈	2 ⁷ / ₈	3	6¾	8 ³ / ₈
	3	2	1½ - 12	1¾ - 12	2¼	2.624	3¾	7/8	1⅞	5/8	1½	¼	2	3	3 ¹ / ₈	6 ⁷ / ₈	8½
6	2	2½	1 ⁷ / ₈ - 12	2¼ - 12	3	3.124	4¼	1	2 ¹ / ₁₆	5/8	5/8	¼	2¼	3¼	3 ³ / ₈	7 ⁷ / ₈	8¾
	1*	2	1½ - 12	1¾ - 12	2¼	2.624	3¾	7/8	1⅞	5/8	1½	¼	2	3	3 ¹ / ₈	7 ³ / ₈	9¼
7	3	2½	1 ⁷ / ₈ - 12	2¼ - 12	3	3.124	4¼	1	2 ¹ / ₁₆	5/8	5/8	¼	2¼	3¼	3 ³ / ₈	7 ⁵ / ₈	9½
	4	3	2¼ - 12	2¾ - 12	3½	3.749	5 ⁷ / ₁₆	1	2 ⁵ / ₈	15/16	5/16	—	2¼	3¼	3 ³ / ₈	7 ⁵ / ₈	9½
8	2	3½	2½ - 12	3¼ - 12	3½	4.249	5 ¹⁵ / ₁₆	1	3	15/16	5/16	—	2¼	3¼	3 ³ / ₈	7 ⁵ / ₈	9½
	1*	2½	1 ⁷ / ₈ - 12	2¼ - 12	3	3.124	4¼	1	2 ¹ / ₁₆	5/8	5/8	¼	2¼	3 ³ / ₈	3½	8 ³ / ₈	10¾
9	3	3	2¼ - 12	2¾ - 12	3½	3.749	5 ⁷ / ₁₆	1	2 ⁵ / ₈	15/16	5/16	—	2¼	3 ³ / ₈	3½	8 ³ / ₈	10¾
	4	3½	2½ - 12	3¼ - 12	3½	4.249	5 ¹⁵ / ₁₆	1	3	15/16	5/16	—	2¼	3 ³ / ₈	3½	8 ³ / ₈	10¾
10	2	4	3 - 12	3¾ - 12	4	4.749	6 ⁵ / ₁₆	1	3 ³ / ₈	15/16	5/16	—	2¼	3 ³ / ₈	3½	8 ³ / ₈	10¾
	1*	3	2¼ - 12	2¾ - 12	3½	3.749	5 ⁷ / ₁₆	1	2 ⁵ / ₈	15/16	5/16	—	2¼	3 ³ / ₈	3¾	9 ³ / ₈	12
11	3	3½	2½ - 12	3¼ - 12	3½	4.249	5 ¹⁵ / ₁₆	1	3	15/16	5/16	—	2¼	3 ⁵ / ₈	3¾	9 ³ / ₈	12
	4	4	3 - 12	3¾ - 12	4	4.749	6 ⁵ / ₁₆	1	3 ³ / ₈	15/16	5/16	—	2¼	3 ⁵ / ₈	3¾	9 ³ / ₈	12
12	5	4½	3¼ - 12	4¼ - 12	4½	5.249	6 ¹⁵ / ₁₆	1	†	15/16	5/16	—	2¼	3 ⁵ / ₈	3¾	9 ³ / ₈	12
	2	5	3½ - 12	4¾ - 12	5	5.749	7 ⁷ / ₁₆	1	†	15/16	5/16	—	2¼	3 ⁵ / ₈	3¾	9 ³ / ₈	12
13	1*	3½	2½ - 12	3¼ - 12	3½	4.249	5 ¹⁵ / ₁₆	1	3	15/16	5/16	—	2¼	3¼	3 ⁷ / ₈	10¼	13¼
	3	4	3 - 12	3¾ - 12	4	4.749	6 ⁵ / ₁₆	1	3 ³ / ₈	15/16	5/16	—	2¼	3¼	3 ⁷ / ₈	10¼	13¼
14	4	4½	3¼ - 12	4¼ - 12	4½	5.249	6 ¹⁵ / ₁₆	1	†	15/16	5/16	—	2¼	3¼	3 ⁷ / ₈	10¼	13¼
	5	5	3½ - 12	4¾ - 12	5	5.749	7 ⁷ / ₁₆	1	†	15/16	5/16	—	2¼	3¼	3 ⁷ / ₈	10¼	13¼
15	2	5½	4 - 12	5¼ - 12	5½	6.249	7 ¹⁵ / ₁₆	1	†	15/16	5/16	—	2¼	3¼	3 ⁷ / ₈	10¼	13¼

*Indicates standard rod for bore size.



†On 4½" rods and above, (4) .515 dia. spanner wrench holes will be provided instead of wrench flats.



Double Rod End Mount**Style KTB**


NFA Style MD

1.5" thru 8" Bore

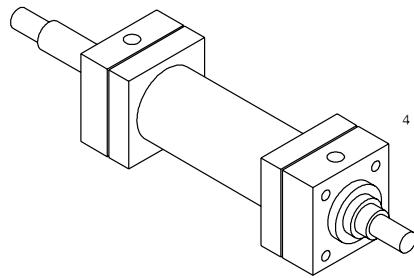



Rod End #1

Rod End #2

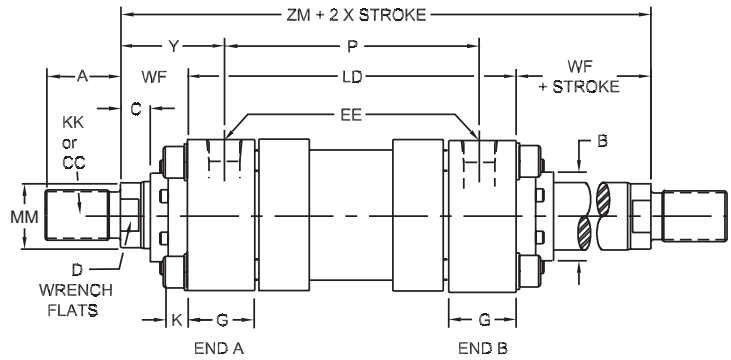**Double Rod End Mount****Style KTB**


NFA Style MD

10" thru 14" Bore

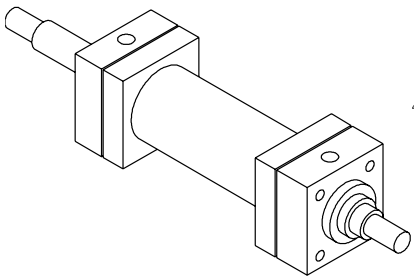


Rod End #1


Rod End #2

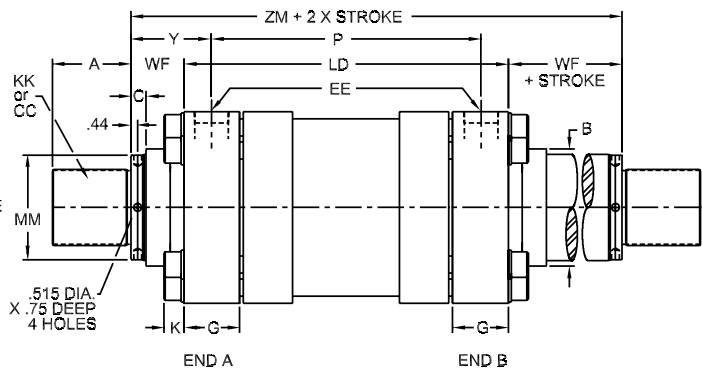**Rod End Dimensions****Style 4**


Standard Male Thread

**Style 8**


Oversize Male Thread

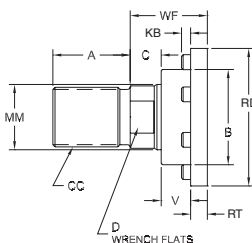**Style 9**

Female Thread

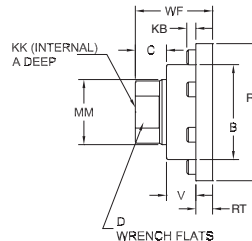**Style 55**

Split Coupler



See Page 26 for dimensional data.

Style 3

"Specials"

Thread Style 3 Special thread, extension, rod eye, blank, etc., are also available.

To order, specify "Style 3" and give desired dimensions for CC or KK, A and WF. If otherwise special, supply dimensioned sketch.

**How to Use Double Rod Cylinder
Dimensioned Drawings**

To determine dimensions for a double rod cylinder, first refer to the desired single rod mounting style cylinder shown on preceding pages of this catalog. After selecting necessary dimensions from that drawing, return to this page and supplement the single rod dimensions with those shown on drawing at left and dimension table below. Note that double rod cylinders have a head (Dim. G) at both ends and that dimension LD replaces LB, etc. The double rod dimensions differ

from, or are in addition to those for single rod cylinders shown on preceding pages and provide the information needed to completely dimension a double rod cylinder.

On a double rod cylinder where the two rod ends are different, be sure to clearly state which rod end is to be assembled at which end. Port position 1 is standard. If other than standard, specify pos. 2, 3 or 4 when viewed from rod end #1 only.

Basic Dimensions for Small Rod Size



Bore	LD	SN	SS	ZM
1 ^{1/2}	4 ^{7/8}	2 ^{7/8}	4 ^{1/8}	6 ^{7/8}
2	4 ^{7/8}	2 ^{7/8}	3 ^{7/8}	7 ^{5/8}
2 ^{1/2}	5	3	3 ^{5/8}	7 ^{3/4}
3 ^{1/4}	5 ^{3/4}	3 ^{1/2}	4 ^{3/8}	9
4	6	4	4 ^{1/4}	9 ^{3/4}
5	6 ^{1/2}	4 ^{1/4}	4 ^{3/4}	10 ^{1/2}
6	7 ^{3/8}	4 ^{7/8}	5 ^{1/8}	11 ^{7/8}
7	8 ^{1/2}	5 ^{3/8}	5 ^{3/4}	13
8	9 ^{1/2}	6 ^{1/8}	6 ^{3/4}	14
10	*			18
12				20 ^{7/8}
14				20 ^{5/8}

*Envelope dimensions for 10-14" sizes do not change from single rod end style.



Mountings available in double rod end style: JJ, JB, E, F, C, D and DD.

Rod Head Flange and Cap Head Flange Mounting Styles



**Rod Head Flange
 Style JJ**
 NFPA Style ME5
 10" thru 14" Bore

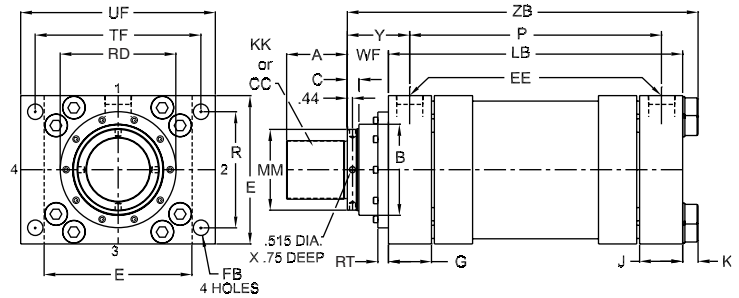



**Rod Head Flange
 Style JB**
 NFPA Style MF5
 10" thru 14" Bore

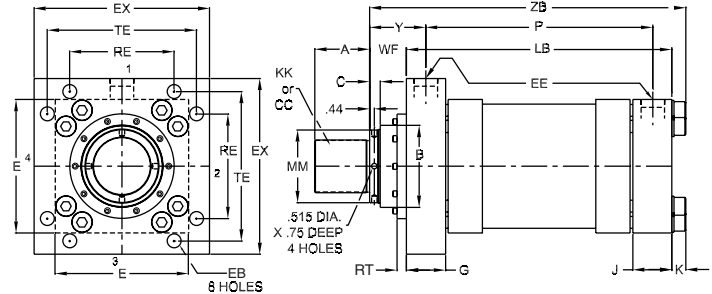

**Cap Head Flange
 Style HH**
 NFPA Style ME6
 10" thru 14" Bore

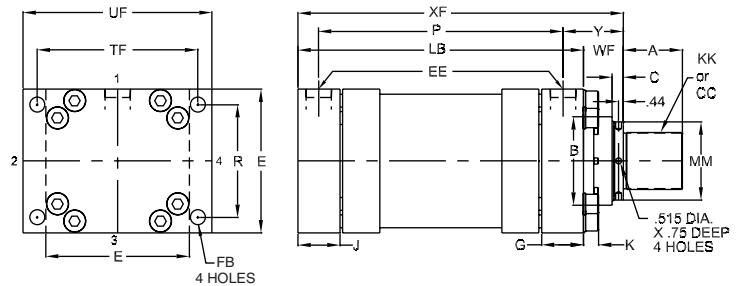


**Cap Head Flange
 Style HB**
 NFPA Style MF6
 10" thru 14" Bore

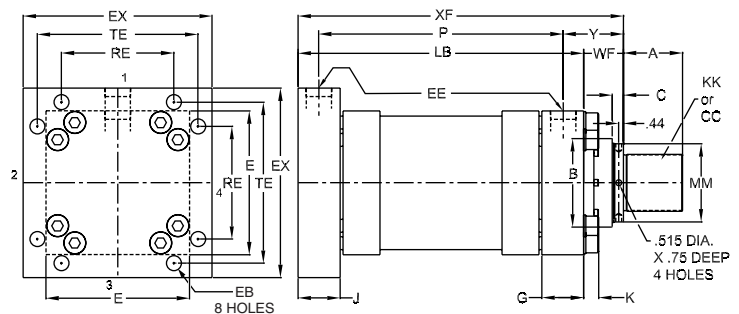

Rod End Dimensions


Style 4

Standard Male Thread

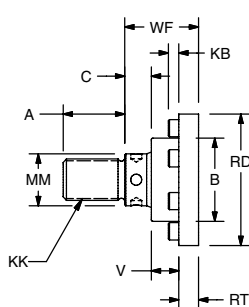


Style 8

Oversize Male Thread

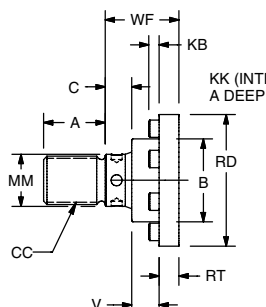


Style 9

Female Thread

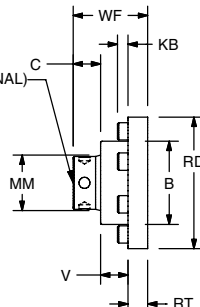

Style 55

Split Coupler

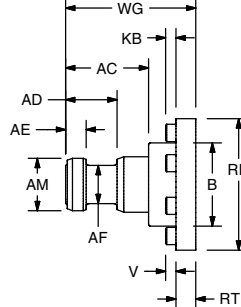

Style 3

"Specials"

Thread Style 3
 Special thread,
 extension, rod eye,
 blank, etc., are also
 available.

To order, specify
 "Style 3" and give
 desired dimensions
 for CC or KK, A and
 WF. If otherwise
 special, supply
 dimensioned sketch.

See Page 26 for dimensional data.

Dimensions**Heavy Duty Mill Hydraulic Cylinder
Series MH****Envelope and Mounting Dimensions**

BORE	E	EB	EE		FB	G	J	K	R	TF	UF
			SAE	NPTF							
10	12 ⁵ / ₈	1 ⁵ / ₁₆	#24	2	1 ¹³ / ₁₆	3 ¹¹ / ₁₆	3 ¹¹ / ₁₆	1.13	9.62	15.88	19
12	14 ⁷ / ₈	1 ⁹ / ₁₆	#24	2 ¹ / ₂	2 ¹ / ₁₆	4 ⁷ / ₁₆	4 ⁷ / ₁₆	1.25	11.45	18.50	22
14	17 ¹ / ₈	1 ⁴ / ₅	#24	2 ¹ / ₂	2 ⁵ / ₁₆	4 ⁷ / ₈	4 ⁷ / ₈	1.25	13.26	21.00	25

Envelope and Mounting Dimensions—Continued

BORE	EX	RE	TE	ADD STROKE		MIN STROKE
				LB	P	
10	16 ⁵ / ₈	9.89	14.13	12 ¹ / ₈	8 ¹ / ₂	3.50
12	19 ³ / ₄	11.75	16.79	14 ¹ / ₂	10 ¹ / ₈	2.63
14	21 ³ / ₄	12.90	18.43	15 ⁵ / ₈	10 ⁷ / ₈	2.38


Dimensions Affected by Rod Size

BORE	Rod No.	MM Rod Size	Thread		A	B	RD	C	RT	V	WF	Y	Add Stroke	
			Style 4 & 9	Style 8									XF	ZB
			KK	CC										
10	1*	4 ¹ / ₂	3 ¹ / ₄ - 12	4 ¹ / ₄ - 12	4 ¹ / ₂	5.249	6 ¹⁵ / ₁₆	1	¹⁵ / ₁₆	1	2 ¹⁵ / ₁₆	4 ³ / ₄	15 ¹ / ₁₆	16 ¹¹ / ₃₂
	3	5	3 ¹ / ₂ - 12	4 ³ / ₄ - 12	5	5.749	7 ⁷ / ₁₆	1	¹⁵ / ₁₆	1	3 ³ / ₁₆	5	15 ⁵ / ₁₆	16 ¹⁹ / ₃₂
	4	5 ¹ / ₂	4 - 12	5 ¹ / ₄ - 12	5 ¹ / ₂	6.249	7 ¹⁵ / ₁₆	1	¹⁵ / ₁₆	1 ¹ / ₄	3 ³ / ₁₆	5	15 ⁵ / ₁₆	16 ¹⁹ / ₃₂
	2	7	4 - 12	5 ¹ / ₂ - 12	5 ¹ / ₂	7.749	9 ⁷ / ₈	1	¹⁵ / ₁₆	1 ¹ / ₄	3 ¹ / ₂	5 ⁵ / ₁₆	15 ⁵ / ₈	16 ²⁹ / ₃₂
12	1*	5 ¹ / ₂	4 - 12	5 ¹ / ₄ - 12	5 ¹ / ₂	6.249	7 ¹⁵ / ₁₆	1	¹⁵ / ₁₆	1 ¹ / ₄	3 ³ / ₁₆	5 ³ / ₈	17 ¹¹ / ₁₆	19 ³ / ₃₂
	3	7	4 - 12	5 ¹ / ₂ - 12	5 ¹ / ₂	7.749	9 ⁷ / ₈	1 ¹ / ₄	¹⁵ / ₁₆	1 ¹ / ₄	3 ¹ / ₂	5 ¹¹ / ₁₆	18	19 ¹³ / ₃₂
	2	8	4 ¹ / ₂ - 12	6 - 12	8	8.749	10 ¹⁵ / ₁₆	1	¹⁵ / ₁₆	1 ¹ / ₂	4	6 ³ / ₁₆	18 ¹ / ₂	19 ²⁹ / ₃₂
14	1*	7	4 - 12	5 ¹ / ₂ - 12	5 ¹ / ₂	7.749	9 ⁷ / ₈	1 ¹ / ₄	¹⁵ / ₁₆	1 ¹ / ₄	3 ¹ / ₂	5 ⁷ / ₈	19 ¹ / ₈	20 ¹⁷ / ₃₂
	3	8	4 ¹ / ₂ - 12	6 - 12	8	8.749	10 ¹⁵ / ₁₆	1	¹⁵ / ₁₆	1 ¹ / ₂	4	6 ³ / ₈	19 ⁵ / ₈	21 ¹ / ₃₂
	2	10	7 ¹ / ₄ - 12	—	10	10.749	14	1	1 ⁵ / ₈	⁵ / ₁₆	4 ¹ / ₂	6 ⁷ / ₈	20 ¹ / ₈	21 ¹⁷ / ₃₂

*Indicates standard rod for bore size.

**Optional SAE Flange Port Pattern
SAE Code 61**

Nom. Flange Size	A	Q	GG	W	X	Z-THD UNC-2B	AA Min.
1 ¹ / ₂	1.50	2.750	1.406	1.38	0.70	1/2-13	1.06
2	2.00	3.062	1.688	1.53	0.84	1/2-13	1.06
2 ¹ / ₂	2.50	3.500	2.000	1.75	1.00	1/2-13	1.19
3	3.00	4.188	2.438	2.09	1.22	5/8-11	1.19

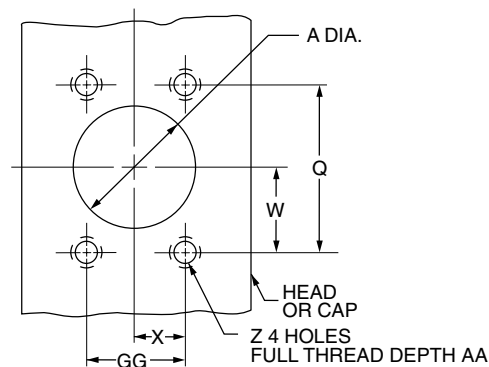


Side and Centerline Lugs Mounting Styles

Side Lugs Mounting

Style C

NFPA Style MS2

10" thru 14" Bore

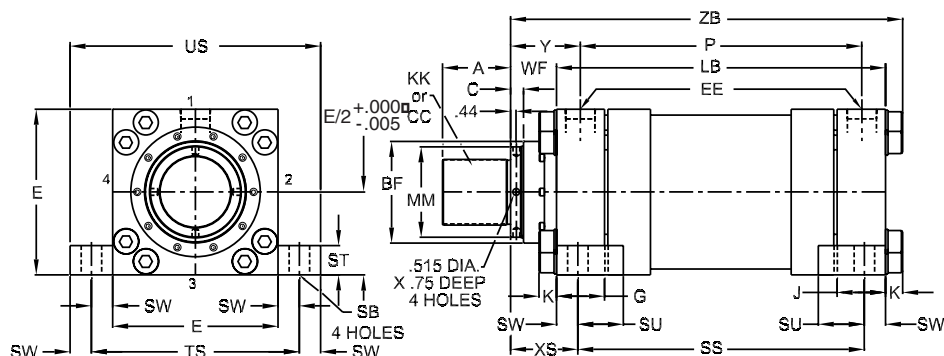


Note: Stroke lengths on lug mounted cylinders should not be shorter than the cylinder bore diameter. Consult factory for recommendations on shorter stroke lengths.

Centerline Lugs Mounting

Style E

NFPA Style MS3


10" thru 14" Bore

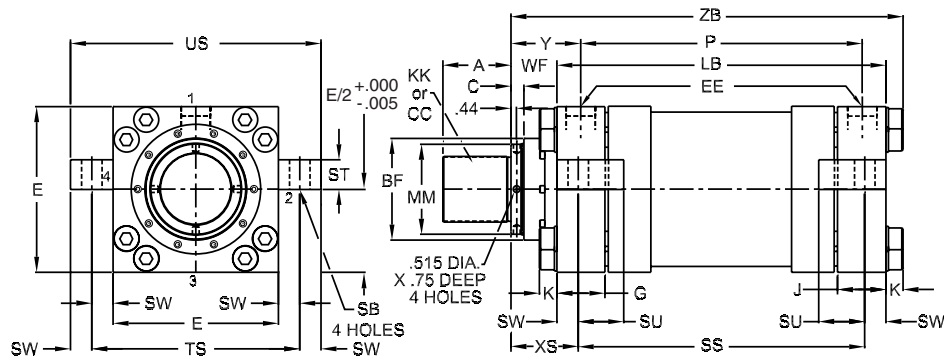

Rod End Dimensions


Style 4

Standard Male Thread

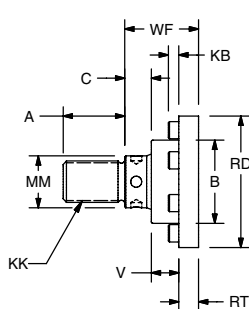


Style 8

Oversize Male Thread

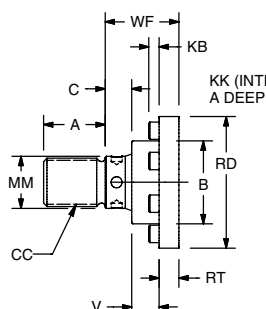


Style 9

Female Thread

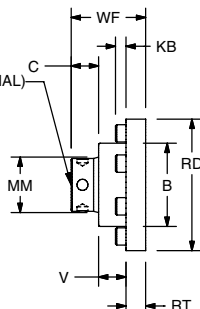

Style 55

Split Coupler

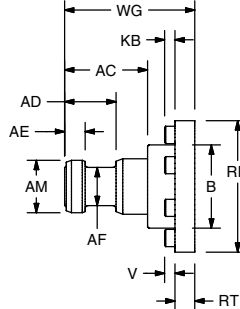

Style 3

"Specials"

Thread Style 3
Special thread,
extension, rod eye,
blank, etc., are also
available.

To order, specify
"Style 3" and give
desired dimensions
for CC or KK, A and
WF. If otherwise
special, supply
dimensioned sketch.

See Page 26 for dimensional data.

Dimensions**Heavy Duty Mill Hydraulic Cylinder
Series MH****Envelope and Mounting Dimensions**

BORE	E	EE		G	J	K	SB	ST	SU
		SAE	NPTF						
10	12 ⁵ / ₈	#24	2	3 ¹¹ / ₁₆	3 ¹¹ / ₁₆	1.13	1 ⁹ / ₁₆	2 ¹ / ₄	3 ¹ / ₂
12	14 ⁷ / ₈	#24	2 ¹ / ₂	4 ⁷ / ₁₆	4 ⁷ / ₁₆	1.25	1 ⁹ / ₁₆	3	4 ¹ / ₄
14	17 ¹ / ₈	#24	2 ¹ / ₂	4 ⁷ / ₈	4 ⁷ / ₈	1.25	2 ⁵ / ₁₆	4	4 ³ / ₄

Envelope and Mounting Dimensions—Continued

BORE	SW	TS	US	ADD STROKE			MIN* STROKE
				LB	P	SS	
10	1 ⁵ / ₈	15 ⁷ / ₈	19 ¹ / ₈	12 ¹ / ₈	8 ¹ / ₂	8 ⁷ / ₈	3.50
12	2	18 ⁷ / ₈	22 ⁷ / ₈	14 ¹ / ₂	10 ¹ / ₈	10 ¹ / ₂	2.63
14	2 ¹ / ₄	21 ⁵ / ₈	26 ¹ / ₈	15 ⁵ / ₈	10 ⁷ / ₈	11 ¹ / ₈	2.38

*Consult C drawing on previous page.


Dimensions Affected by Rod Size

BORE	Rod No.	MM Rod Size	Thread		A	B	RD	C	RT	V	WF	Y	XS	Add Stroke ZB
			Style 4 & 9 KK	Style 8 CC										
10	1*	4 ¹ / ₂	3 ¹ / ₄ - 12	4 ¹ / ₄ - 12	4 ¹ / ₂	5.249	6 ¹⁵ / ₁₆	1	1 ⁵ / ₁₆	1	2 ¹⁵ / ₁₆	4 ³ / ₄	4 ⁹ / ₁₆	16 ¹¹ / ₃₂
	3	5	3 ¹ / ₂ - 12	4 ³ / ₄ - 12	5	5.749	7 ⁷ / ₁₆	1	1 ⁵ / ₁₆	1	3 ³ / ₁₆	5	4 ¹³ / ₁₆	16 ¹⁹ / ₃₂
	4	5 ¹ / ₂	4 - 12	5 ¹ / ₄ - 12	5 ¹ / ₂	6.249	7 ¹⁵ / ₁₆	1	1 ⁵ / ₁₆	1 ¹ / ₄	3 ³ / ₁₆	5	4 ¹³ / ₁₆	16 ¹⁹ / ₃₂
	2	7	4 - 12	5 ¹ / ₂ - 12	5 ¹ / ₂	7.749	9 ⁷ / ₈	1	1 ⁵ / ₁₆	1 ¹ / ₄	3 ¹ / ₂	5 ⁵ / ₁₆	5 ¹ / ₈	16 ²⁹ / ₃₂
12	1*	5 ¹ / ₂	4 - 12	5 ¹ / ₄ - 12	5 ¹ / ₂	6.249	7 ¹⁵ / ₁₆	1	1 ⁵ / ₁₆	1 ¹ / ₄	3 ³ / ₁₆	5 ³ / ₈	5 ³ / ₁₆	19 ³ / ₃₂
	3	7	4 - 12	5 ¹ / ₂ - 12	5 ¹ / ₂	7.749	9 ⁷ / ₈	1 ¹ / ₄	1 ⁵ / ₁₆	1 ¹ / ₄	3 ¹ / ₂	5 ¹¹ / ₁₆	5 ¹ / ₂	19 ¹³ / ₃₂
	2	8	4 ¹ / ₂ - 12	6 - 12	8	8.749	10 ¹⁵ / ₁₆	1	1 ⁵ / ₁₆	1 ¹ / ₂	4	6 ³ / ₁₆	6	19 ²⁹ / ₃₂
14	1*	7	4 - 12	5 ¹ / ₂ - 12	5 ¹ / ₂	7.749	9 ⁷ / ₈	1 ¹ / ₄	1 ⁵ / ₁₆	1 ¹ / ₄	3 ¹ / ₂	5 ⁷ / ₈	5 ³ / ₄	20 ¹⁷ / ₃₂
	3	8	4 ¹ / ₂ - 12	6 - 12	8	8.749	10 ¹⁵ / ₁₆	1	1 ⁵ / ₁₆	1 ¹ / ₂	4	6 ³ / ₈	6 ¹ / ₄	21 ¹ / ₃₂
	2	10	7 ¹ / ₄ - 12	—	10	10.749	14	1	1 ⁵ / ₈	5 ¹ / ₁₆	4 ¹ / ₂	6 ⁷ / ₈	6 ³ / ₄	21 ¹⁷ / ₃₂

*Indicates standard rod for bore size.



**Optional SAE Flange Port Pattern
SAE Code 61**

Nom. Flange Size	A	Q	GG	W	X	Z-THD UNC-2B	AA Min.
1 ¹ / ₂	1.50	2.750	1.406	1.38	0.70	1/2-13	1.06
2	2.00	3.062	1.688	1.53	0.84	1/2-13	1.06
2 ¹ / ₂	2.50	3.500	2.000	1.75	1.00	1/2-13	1.19
3	3.00	4.188	2.438	2.09	1.22	5/8-11	1.19


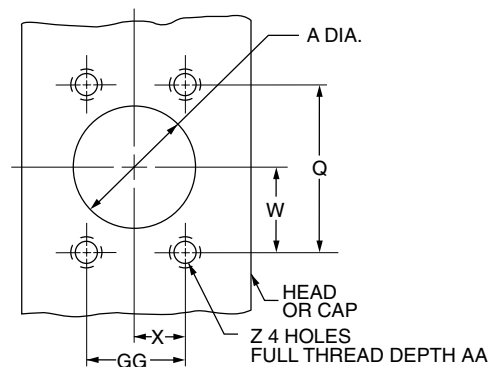


Side and Centerline Lugs Mounting Styles

**Cap Fixed Clevis Mounting
 Style BB**
 NFPA Style MP1
 10" thru 14" Bore

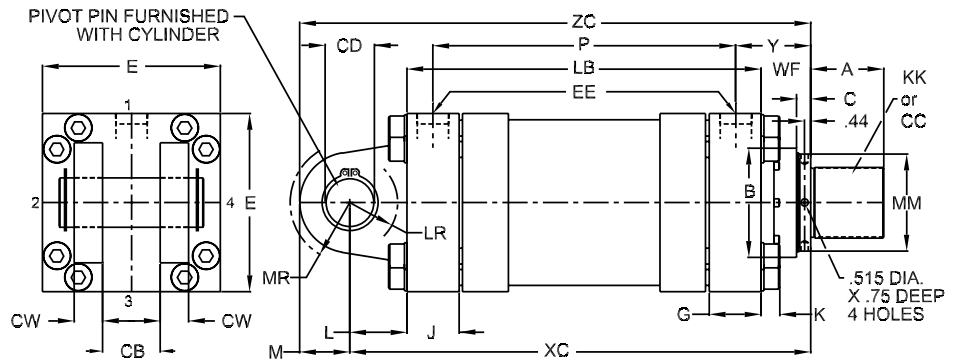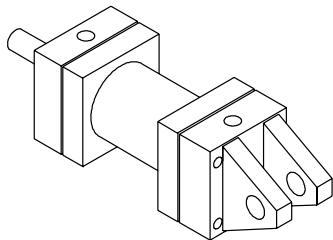


**Pivot Eye
 Style BE**
 NFPA Style MP3
 10" thru 14" Bore

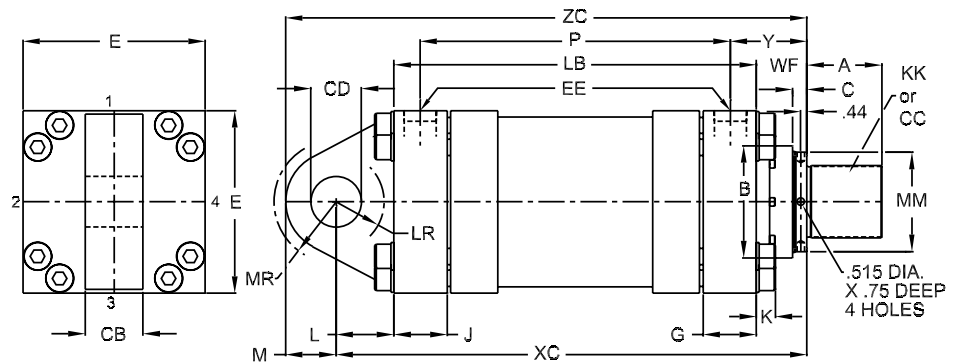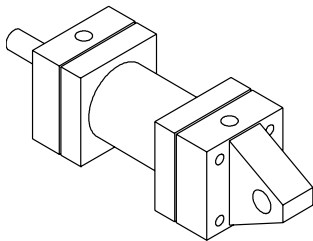

Rod End Dimensions


Style 4

Standard Male Thread

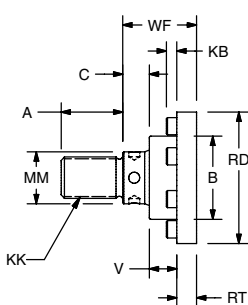


Style 8

Oversize Male Thread

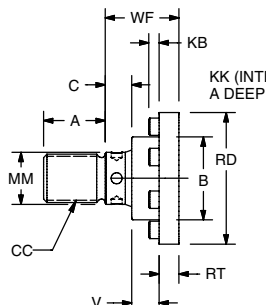


Style 9

Female Thread

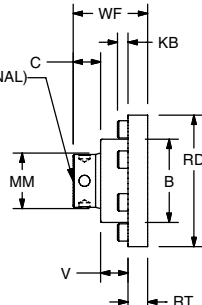

Style 55

Split Coupler

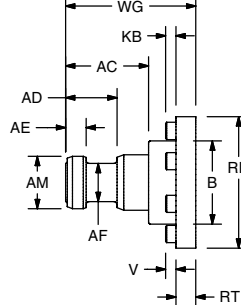

Style 3

"Specials"

Thread Style 3
 Special thread,
 extension, rod eye,
 blank, etc., are also
 available.

To order, specify
 "Style 3" and give
 desired dimensions
 for CC or KK, A and
 WF. If otherwise
 special, supply
 dimensioned sketch.

See Page 26 for dimensional data.

Dimensions**Heavy Duty Mill Hydraulic Cylinder
Series MH****Envelope and Mounting Dimensions**

BORE	CB	CD	CW	E	EE		G	J	K
					SAE	NPTF			
10	4	3.50	2	12 ⁵ / ₈	#24	2	3 ¹¹ / ₁₆	3 ¹¹ / ₁₆	1.13
12	4 ¹ / ₂	4.00	2 ¹ / ₄	14 ⁷ / ₈	#24	2 ¹ / ₂	4 ⁷ / ₁₆	4 ⁷ / ₁₆	1.25
14	6	5.00	3	17 ¹ / ₈	#24	2 ¹ / ₂	4 ⁷ / ₈	4 ⁷ / ₈	1.25

Envelope and Mounting Dimensions—Continued

BORE	L	LR	M/MR	ADD STROKE		MIN STROKE
				LB	P	
10	4 ¹ / ₁₆	3 ³ / ₈	3 ¹ / ₂	12 ¹ / ₈	8 ¹ / ₂	3.50
12	4 ¹ / ₂	3 ⁷ / ₈	4	14 ¹ / ₂	10 ¹ / ₈	2.63
14	5 ³ / ₄	4 ³ / ₁₆	5	15 ⁵ / ₈	10 ⁷ / ₈	2.38


Dimensions Affected by Rod Size

BORE	Rod No.	MM Rod Size	Thread		A	B	RD	C	RT	V	WF	Y	Add Stroke	
			Style 4 & 9	Style 8									XC	ZC
			KK	CC										
10	1*	4 ¹ / ₂	3 ¹ / ₄ - 12	4 ¹ / ₄ - 12	4 ¹ / ₂	5.249	6 ¹⁵ / ₁₆	1	¹⁵ / ₁₆	1	2 ¹⁵ / ₁₆	4 ³ / ₄	19 ¹ / ₁₆	22 ⁹ / ₁₆
	3	5	3 ¹ / ₂ - 12	4 ³ / ₄ - 12	5	5.749	7 ⁷ / ₁₆	1	¹⁵ / ₁₆	1	3 ³ / ₁₆	5	19 ⁵ / ₁₆	22 ¹³ / ₁₆
	4	5 ¹ / ₂	4 - 12	5 ¹ / ₄ - 12	5 ¹ / ₂	6.249	7 ¹⁵ / ₁₆	1	¹⁵ / ₁₆	1 ¹ / ₄	3 ³ / ₁₆	5	19 ⁵ / ₁₆	22 ¹³ / ₁₆
	2	7	4 - 12	5 ¹ / ₂ - 12	5 ¹ / ₂	7.749	9 ⁷ / ₈	1	¹⁵ / ₁₆	1 ¹ / ₄	3 ¹ / ₂	5 ⁵ / ₁₆	19 ⁵ / ₈	23 ¹ / ₈
12	1*	5 ¹ / ₂	4 - 12	5 ¹ / ₄ - 12	5 ¹ / ₂	6.249	7 ¹⁵ / ₁₆	1	¹⁵ / ₁₆	1 ¹ / ₄	3 ³ / ₁₆	5 ³ / ₈	22 ³ / ₁₆	26 ³ / ₁₆
	3	7	4 - 12	5 ¹ / ₂ - 12	5 ¹ / ₂	7.749	9 ⁷ / ₈	1 ¹ / ₄	¹⁵ / ₁₆	1 ¹ / ₄	3 ¹ / ₂	5 ¹¹ / ₁₆	22 ¹ / ₂	26 ¹ / ₂
	2	8	4 ¹ / ₂ - 12	6 - 12	8	8.749	10 ¹⁵ / ₁₆	1	¹⁵ / ₁₆	1 ¹ / ₂	4	6 ³ / ₁₆	23	27
14	1*	7	4 - 12	5 ¹ / ₂ - 12	5 ¹ / ₂	7.749	9 ⁷ / ₈	1 ¹ / ₄	¹⁵ / ₁₆	1 ¹ / ₄	3 ¹ / ₂	5 ⁷ / ₈	24 ⁷ / ₈	29 ⁷ / ₈
	3	8	4 ¹ / ₂ - 12	6 - 12	8	8.749	10 ¹⁵ / ₁₆	1	¹⁵ / ₁₆	1 ¹ / ₂	4	6 ³ / ₈	25 ³ / ₈	30 ³ / ₈
	2	10	7 ¹ / ₄ - 12	—	10	10.749	14	1	1 ⁵ / ₈	⁵ / ₁₆	4 ¹ / ₂	6 ⁷ / ₈	25 ⁷ / ₈	30 ⁷ / ₈

*Indicates standard rod for bore size.

**Optional SAE Flange Port Pattern
SAE Code 61**



Nom. Flange Size	A	Q	GG	W	X	Z-THD UNC-2B	AA Min.
1 ¹ / ₂	1.50	2.750	1.406	1.38	0.70	1/2-13	1.06
2	2.00	3.062	1.688	1.53	0.84	1/2-13	1.06
2 ¹ / ₂	2.50	3.500	2.000	1.75	1.00	1/2-13	1.19
3	3.00	4.188	2.438	2.09	1.22	5/8-11	1.19

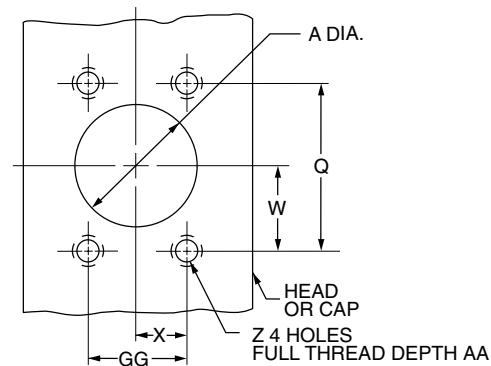

Trunnion Mounting Styles


Head Trunnion Mounting Style D

NFPA Style MT1
 10" thru 14" Bore

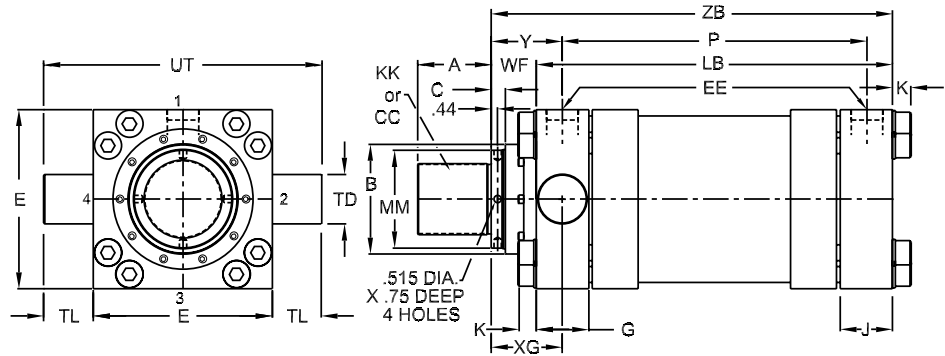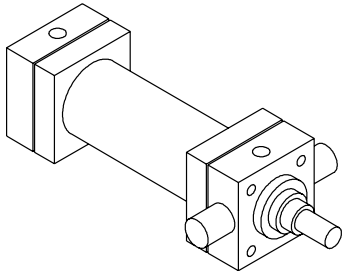

Intermediate Fixed Trunnion Mounting Style DD



NFPA Style MT4
 10" thru 14" Bore

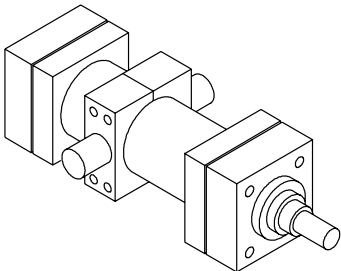

For all intermediate trunnion applications,
 please consult factory for appropriate design
 and dimensions.

Cap Trunnion Mounting Style DB


NFPA Style MT2
 10" thru 14" Bore

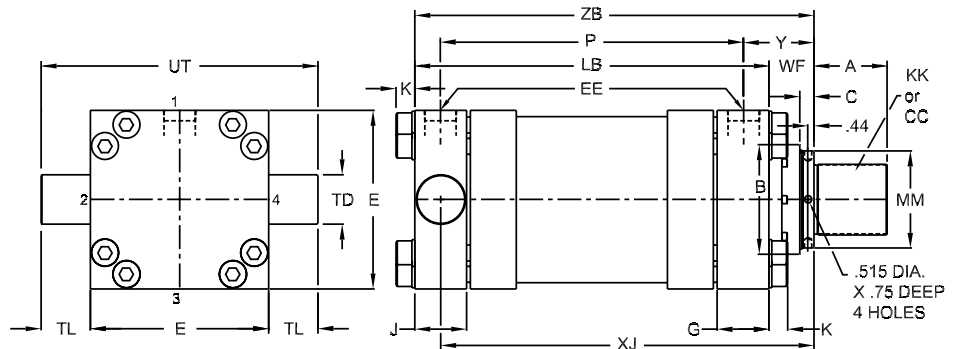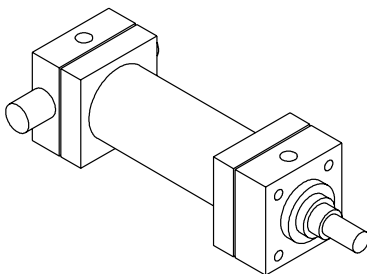

Rod End Dimensions


Style 4

Standard Male Thread

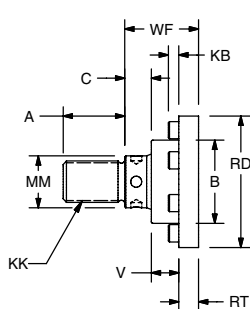


Style 8

Oversize Male Thread

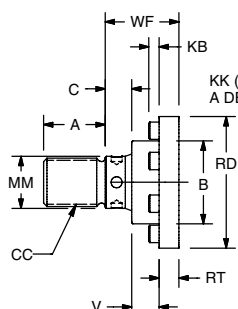


Style 9

Female Thread

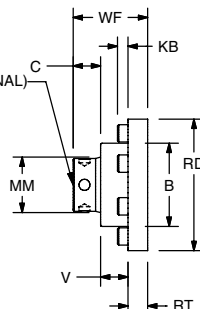

Style 55

Split Coupler

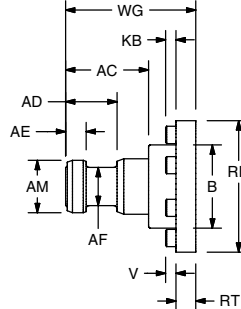

Style 3

"Specials"

Thread Style 3
 Special thread,
 extension, rod eye,
 blank, etc., are also
 available.

To order, specify
 "Style 3" and give
 desired dimensions
 for CC or KK, A and
 WF. If otherwise
 special, supply
 dimensioned sketch.

See Page 26 for dimensional data.

Dimensions**Heavy Duty Mill Hydraulic Cylinder
Series MH****Envelope and Mounting Dimensions**

BORE	BD	E	EE		G	J	K	TD	TL	UT	ADD STROKE		MIN STROKE D & DB
			SAE	NPTF							LB	P	
10	4 ¹ / ₂	12 ⁵ / ₈	#24	2	3 ¹¹ / ₁₆	3 ¹¹ / ₁₆	1.13	3.500	3 ¹ / ₂	19 ⁵ / ₈	12 ¹ / ₈	8 ¹ / ₂	3.50
12	5 ¹ / ₂	14 ⁷ / ₈	#24	2 ¹ / ₂	4 ⁷ / ₁₆	4 ⁷ / ₁₆	1.25	4.000	4	22 ⁷ / ₈	14 ¹ / ₂	10 ¹ / ₈	2.63
14	5 ¹ / ₂	17 ¹ / ₈	#24	2 ¹ / ₂	4 ⁷ / ₈	4 ⁷ / ₈	1.25	4.500	4 ¹ / ₂	26 ¹ / ₈	15 ⁵ / ₈	10 ⁷ / ₈	2.38


Dimensions Affected by Rod Size

BORE	Rod No.	MM Rod Size	Thread		A	B	RD	C	RT	V	WF	XG	Y	Add Stroke	
			Style 4 & 9	Style 8										XJ	ZB
			KK	CC											
10	1*	4 ¹ / ₂	3 ¹ / ₄ - 12	4 ¹ / ₄ - 12	4 ¹ / ₂	5.249	6 ¹⁵ / ₁₆	1	1 ⁵ / ₁₆	1	2 ¹⁵ / ₁₆	4 ³ / ₄	4 ³ / ₄	13 ³ / ₈	16 ¹¹ / ₃₂
	3	5	3 ¹ / ₂ - 12	4 ³ / ₄ - 12	5	5.749	7 ⁷ / ₁₆	1	1 ⁵ / ₁₆	1	3 ³ / ₁₆	5	5	13 ⁵ / ₈	16 ¹⁹ / ₃₂
	4	5 ¹ / ₂	4 - 12	5 ¹ / ₄ - 12	5 ¹ / ₂	6.249	7 ¹⁵ / ₁₆	1	1 ⁵ / ₁₆	1 ¹ / ₄	3 ³ / ₁₆	5	5	13 ⁵ / ₈	16 ¹⁹ / ₃₂
	2	7	4 - 12	5 ¹ / ₂ - 12	5 ¹ / ₂	7.749	9 ⁷ / ₈	1	1 ⁵ / ₁₆	1 ¹ / ₄	3 ¹ / ₂	5 ⁵ / ₁₆	5 ⁵ / ₁₆	13 ¹⁵ / ₁₆	16 ²⁹ / ₃₂
12	1*	5 ¹ / ₂	4 - 12	5 ¹ / ₄ - 12	5 ¹ / ₂	6.249	7 ¹⁵ / ₁₆	1	1 ⁵ / ₁₆	1 ¹ / ₄	3 ³ / ₁₆	5 ³ / ₈	5 ³ / ₈	15 ¹ / ₂	19 ³ / ₃₂
	3	7	4 - 12	5 ¹ / ₂ - 12	5 ¹ / ₂	7.749	9 ⁷ / ₈	1 ¹ / ₄	1 ⁵ / ₁₆	1 ¹ / ₄	3 ¹ / ₂	5 ¹¹ / ₁₆	5 ¹¹ / ₁₆	15 ¹³ / ₁₆	19 ¹³ / ₃₂
	2	8	4 ¹ / ₂ - 12	6 - 12	8	8.749	10 ¹⁵ / ₁₆	1	1 ⁵ / ₁₆	1 ¹ / ₂	4	6 ³ / ₁₆	6 ³ / ₁₆	16 ⁵ / ₁₆	19 ²⁹ / ₃₂
	1*	7	4 - 12	5 ¹ / ₂ - 12	5 ¹ / ₂	7.749	9 ⁷ / ₈	1 ¹ / ₄	1 ⁵ / ₁₆	1 ¹ / ₄	3 ¹ / ₂	5 ¹⁵ / ₁₆	5 ⁷ / ₈	16 ¹¹ / ₁₆	20 ¹⁷ / ₃₂
14	3	8	4 ¹ / ₂ - 12	6 - 12	8	8.749	10 ¹⁵ / ₁₆	1	1 ⁵ / ₁₆	1 ¹ / ₂	4	6 ⁷ / ₁₆	6 ³ / ₈	17 ³ / ₁₆	21 ¹ / ₃₂
	2	10	7 ¹ / ₄ - 12	—	10	10.749	14	1	1 ⁵ / ₈	5 ⁵ / ₁₆	4 ¹ / ₂	6 ¹⁵ / ₁₆	6 ⁷ / ₈	17 ¹¹ / ₁₆	21 ¹⁷ / ₃₂

*Indicates standard rod for bore size.

**Optional SAE Flange Port Pattern
SAE Code 61**

Nom. Flange Size	A	Q	GG	W	X	Z-THD UNC-2B	AA Min.
1 ¹ / ₂	1.50	2.750	1.406	1.38	0.70	1 ¹ / ₂ -13	1.06
2	2.00	3.062	1.688	1.53	0.84	1 ¹ / ₂ -13	1.06
2 ¹ / ₂	2.50	3.500	2.000	1.75	1.00	1 ¹ / ₂ -13	1.19
3	3.00	4.188	2.438	2.09	1.22	5 ⁵ / ₈ -11	1.19

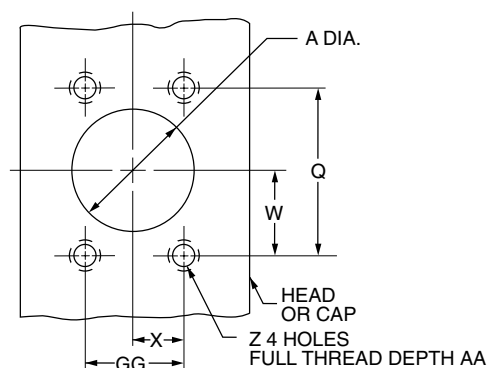

Cylinder Accessories

Parker offers a complete range of cylinder accessories to assure you of greatest versatility in present or future cylinder applications.

Rod End Accessories

Accessories offered for the rod end of the cylinder include Rod Clevis, Eye Bracket, Knuckle, Clevis Bracket and Pivot Pin. To select the proper part number for any desired accessory, refer to Chart A below and look opposite the thread size of the rod end as indicated in the first column. The Pivot Pins, Eye Brackets and Clevis Brackets are listed opposite the thread size which their mating Knuckles or Clevises fit.

Thread Size	Mating Parts			Mating Parts		
	Rod Clevis	Eye Bracket	Pin	Knuckle	Clevis Bracket	Pin
5/16-24	51221	74077	—	74075	74076	74078
7/16-20	50940	69195	68368	69089	69205	68368
1/2-20	50941	69195	68368	69090	69205	68368
3/4-16	50942	69196	68369	69091	69206	68369
3/4-16	133284	69196	68369	69091	69206	68369
7/8-14	50943	*85361	68370	69092	69207	68370
1-14	50944	*85361	68370	69093	69207	68370
1-14	133285	*85361	68370	69093	69207	68370
1 1/4-12	50945	69198	68371	69094	69208	68371
1 1/4-12	133286	69198	68371	69094	69208	68371
1 1/2-12	50946	*85362	68372	69095	69209	68372
1 3/4-12	50947	*85363	68373	69096	69210	69215
1 7/8-12	50948	*85363	68373	69097	69210	69215
2 1/4-12	50949	*85364	68374	69098	69211	68374
2 1/2-12	50950	*85365	68375	69099	69212	68375
2 3/4-12	50951	*85365	68375	69100	69213	69216
3 1/4-12	50952	73538	73545	73536	73542	73545
3 1/2-12	50953	73539	73547	73437	73542	73545
4-12	50954	73539	73547	73438	73543	82181

Chart A

*Cylinder accessory dimensions conform to NFPA recommended standard NFPA/T3.6.8 R1-1984, NFPA recommended standard fluid power systems — cylinder — dimensions for accessories for cataloged square head industrial types. Parker adopted this standard in April, 1985. Eye Brackets or Mounting Plates shipped before this date may have different dimensions and will not necessarily interchange with the NFPA standard. For dimensional information on older style Eye Brackets or Mounting Plates consult Drawing #144805 or previous issues of this catalog.

Accessory Load Capacity

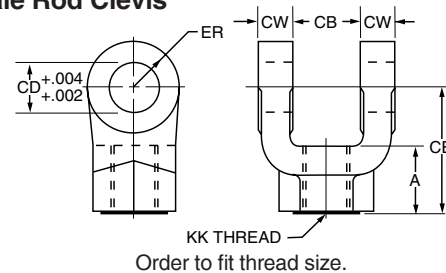
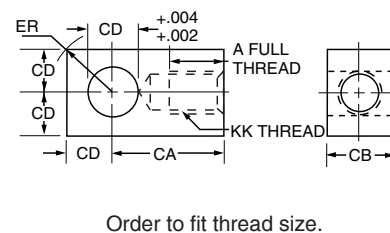
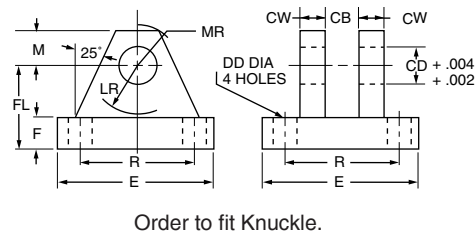
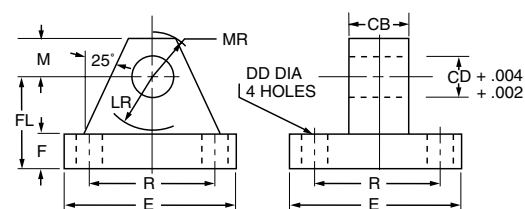
The various accessories on this and the following pages have been load rated for your convenience. The load capacity in lbs., shown on the following page is the recommended maximum load for that accessory based on a 4:1 design factor in tension. (Pivot Pin is rated in shear.) Before specifying, compare the actual load or the tension (pull) force at maximum operating pressure of the cylinder with the load capacity of the accessory you plan to use. If load or pull force of cylinder exceeds load capacity of accessory, consult factory.

Chart B


Mtg. Plate	Series 2H
Part No.	Bore Size
69195	1 1/2"
69196	2", 2 1/2"
*85361	3 1/4"
69198	4"
*85362	5"
*85363	6"

Mounting Plates

Mounting Plates for Style BB (clevis mounted) cylinders are offered. To select proper part number for your application, refer to Chart B, above right.

Female Rod Clevis**Knuckle (Female Rod Eye)****Clevis Bracket for Knuckle****Mounting Plate or Eye Bracket**

1. When used to mate with the Rod Clevis, select from Chart A.
2. When used to mount the Style BB cylinders, select from the Mounting Plate Selection Table. See Chart B at lower left.

Pivot Pin

1. Pivot Pins are furnished with Clevis Mounted Cylinders as standard.
2. Pivot Pins are furnished with (2) Retainer Rings.
3. Pivot Pins must be ordered as separate item if to be used with Knuckles, Rod Clevises, or Clevis Brackets.

Mounting Accessory Dimensions

Heavy Duty Mill Hydraulic Cylinder
Series MH

	Female Rod Clevis Part Number																		
	51221†	50940	50941	50942	133284	50943	50944	133285	50945	133286	50946	50947	50948	50949	50950	50951	50952	50953	50954
A	$\frac{13}{16}$	$\frac{3}{4}$	$\frac{3}{4}$	$\frac{1}{8}$	$\frac{1}{8}$	$\frac{15}{8}$	$\frac{15}{8}$	$\frac{15}{8}$	$\frac{17}{8}$	2	$\frac{21}{4}$	3	3	$\frac{31}{2}$	$\frac{31}{2}$	$\frac{31}{2}$	$\frac{31}{2}$ †	4†	4†
CB	$\frac{11}{32}$	$\frac{3}{4}$	$\frac{3}{4}$	$\frac{1}{4}$	$\frac{1}{4}$	$\frac{1}{2}$	$\frac{1}{2}$	$\frac{1}{2}$	2	2	$\frac{21}{2}$	$\frac{21}{2}$	$\frac{21}{2}$	3	3	3	4	$\frac{41}{2}$	$\frac{41}{2}$
CD	$\frac{5}{16}$	$\frac{1}{2}$	$\frac{1}{2}$	$\frac{3}{4}$	$\frac{3}{4}$	1	1	1	$\frac{13}{8}$	$\frac{13}{8}$	$\frac{13}{4}$	2	2	$\frac{21}{2}$	3	3	$\frac{31}{2}$	4	4
CE	$\frac{21}{4}$	$\frac{1}{2}$	$\frac{1}{2}$	$\frac{21}{8}$	$\frac{23}{8}$	$\frac{215}{16}$	$\frac{215}{16}$	$\frac{31}{8}$	$\frac{33}{4}$	$\frac{41}{8}$	$\frac{41}{2}$	$\frac{51}{2}$	$\frac{51}{2}$	$\frac{61}{2}$	$\frac{63}{4}$	$\frac{63}{4}$	$\frac{73}{4}$	$\frac{813}{16}$	$\frac{813}{16}$
CW	$\frac{13}{64}$	$\frac{1}{2}$	$\frac{1}{2}$	$\frac{5}{8}$	$\frac{5}{8}$	$\frac{3}{4}$	$\frac{3}{4}$	$\frac{3}{4}$	1	1	$\frac{11}{4}$	$\frac{11}{4}$	$\frac{11}{4}$	$\frac{11}{2}$	$\frac{11}{2}$	$\frac{11}{2}$	2	$\frac{21}{4}$	$\frac{21}{4}$
ER	$\frac{19}{64}$	$\frac{1}{2}$	$\frac{1}{2}$	$\frac{3}{4}$	$\frac{3}{4}$	1	1	1	$\frac{13}{8}$	$\frac{13}{8}$	$\frac{13}{4}$	2	2	$\frac{21}{2}$	$\frac{23}{4}$	$\frac{23}{4}$	$\frac{31}{2}$	4	4
KK	$\frac{5}{16}$ -24	$\frac{7}{16}$ -20	$\frac{1}{2}$ -20	$\frac{3}{4}$ -16	$\frac{3}{4}$ -16	$\frac{7}{8}$ -14	1-14	1-14	$\frac{11}{4}$ -12	$\frac{11}{4}$ -12	$\frac{11}{2}$ -12	$\frac{13}{4}$ -12	$\frac{17}{8}$ -12	$\frac{21}{4}$ -12	$\frac{21}{2}$ -12	$\frac{23}{4}$ -12	$\frac{31}{4}$ -12	$\frac{31}{2}$ -12	4-12
Load Capacity Lbs. Ø	2600	4250	4900	11200	11200	18800	19500	19500	33500	33500	45600	65600	65600	98200	98200	98200	156700	193200	221200

	Knuckle Part Number																
	74075	69089	69090	69091	69092	69093	69094	69095	69096	69097	69098	69099	69100	73536	73437	73438	73439
A	³ / ₄	³ / ₄	³ / ₄	¹ / ₈	¹ / ₈	¹ ⁵ / ₈	2	2 ¹ / ₄	2 ¹ / ₄	3	3 ¹ / ₂	3 ¹ / ₂	3 ⁵ / ₈	4 ¹ / ₂	5	5 ¹ / ₂	5 ¹ / ₂
CA	1 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₂	2 ¹ / ₁₆	2 ³ / ₈	2 ¹³ / ₁₆	3 ⁷ / ₁₆	4	4 ³ / ₈	5	5 ¹³ / ₁₆	6 ¹ / ₈	6 ¹ / ₂	7 ⁵ / ₈	7 ⁵ / ₈	9 ¹ / ₈	9 ¹ / ₈
CB	⁷ / ₁₆	³ / ₄	³ / ₄	1 ¹ / ₄	1 ¹ / ₂	1 ¹ / ₂	2	2 ¹ / ₂	2 ¹ / ₂	2 ¹ / ₂	3	3	3 ¹ / ₂	4	4	4 ¹ / ₂	5
CD	⁷ / ₁₆	¹ / ₂	¹ / ₂	³ / ₄	1	1	1 ³ / ₈	1 ³ / ₄	2	2	2 ¹ / ₂	3	3	3 ¹ / ₂	3 ¹ / ₂	4	4
ER	¹⁹ / ₃₂	²³ / ₃₂	²³ / ₃₂	1 ¹ / ₁₆	1 ⁷ / ₁₆	1 ⁷ / ₁₆	1 ³¹ / ₃₂	2 ¹ / ₂	2 ²⁷ / ₃₂	2 ²⁷ / ₃₂	3 ⁹ / ₁₆	4 ¹ / ₄	4 ¹ / ₄	4 ³¹ / ₃₂	4 ³¹ / ₃₂	5 ¹¹ / ₁₆	5 ¹¹ / ₁₆
KK	⁵ / ₁₆ -24	⁷ / ₁₆ -20	¹ / ₂ -20	³ / ₄ -16	⁷ / ₈ -14	1-14	1 ¹ / ₄ -12	1 ¹ / ₂ -12	1 ³ / ₄ -12	1 ⁷ / ₈ -12	2 ¹ / ₄ -12	2 ¹ / ₂ -12	2 ³ / ₄ -12	3 ¹ / ₄ -12	3 ¹ / ₂ -12	4-12	4 ¹ / ₂ -12
Load Capacity Lbs. Ø	3300	5000	5700	12100	13000	21700	33500	45000	53500	75000	98700	110000	123300	161300	217300	273800	308500

	Clevis Bracket for Knuckle Part Number												
	74076	69205	69206	69207	69208	69209	69210	69211	69212	69213	73542	73543	73544
CB	$\frac{15}{32}$	$\frac{3}{4}$	$\frac{1}{4}$	$\frac{11}{2}$	2	$\frac{21}{2}$	$\frac{21}{2}$	3	3	$\frac{31}{2}$	4	$\frac{41}{2}$	5
CD	$\frac{7}{16}$	$\frac{1}{2}$	$\frac{3}{4}$	1	$\frac{13}{8}$	$\frac{13}{4}$	2	$\frac{21}{2}$	3	3	$\frac{31}{2}$	4	4
CW	$\frac{3}{8}$	$\frac{1}{2}$	$\frac{5}{8}$	$\frac{3}{4}$	1	$\frac{11}{4}$	$\frac{11}{2}$	$\frac{11}{2}$	$\frac{11}{2}$	$\frac{11}{2}$	2	2	2
DD	$\frac{17}{64}$	$\frac{13}{32}$	$\frac{17}{32}$	$\frac{21}{32}$	$\frac{21}{32}$	$\frac{29}{32}$	$\frac{11}{16}$	$\frac{13}{16}$	$\frac{15}{16}$	$\frac{15}{16}$	$\frac{113}{16}$	$\frac{21}{16}$	$\frac{21}{16}$
E	$\frac{21}{4}$	$\frac{31}{2}$	5	$\frac{61}{2}$	$\frac{71}{2}$	$\frac{91}{2}$	$\frac{123}{4}$	$\frac{123}{4}$	$\frac{123}{4}$	$\frac{123}{4}$	$\frac{151}{2}$	$\frac{171}{2}$	$\frac{171}{2}$
F	$\frac{3}{8}$	$\frac{1}{2}$	$\frac{5}{8}$	$\frac{3}{4}$	$\frac{7}{8}$	$\frac{7}{8}$	1	1	1	1	$\frac{111}{16}$	$\frac{115}{16}$	$\frac{115}{16}$
FL	1	$\frac{11}{2}$	$\frac{17}{8}$	$\frac{21}{4}$	3	$\frac{35}{8}$	$\frac{41}{4}$	$\frac{41}{2}$	6	6	$\frac{611}{16}$	$\frac{711}{16}$	$\frac{711}{16}$
LR	$\frac{5}{8}$	$\frac{3}{4}$	$\frac{13}{16}$	$\frac{11}{2}$	2	$\frac{23}{4}$	$\frac{33}{16}$	$\frac{31}{2}$	$\frac{41}{4}$	$\frac{41}{4}$	5	$\frac{53}{4}$	$\frac{53}{4}$
M	$\frac{3}{8}$	$\frac{1}{2}$	$\frac{3}{4}$	1	$\frac{13}{8}$	$\frac{13}{4}$	$\frac{21}{4}$	$\frac{21}{2}$	3	3	$\frac{31}{2}$	4	4
MR	$\frac{1}{2}$	$\frac{5}{8}$	$\frac{29}{32}$	$\frac{11}{4}$	$\frac{121}{32}$	$\frac{27}{32}$	$\frac{225}{32}$	$\frac{31}{8}$	$\frac{319}{32}$	$\frac{319}{32}$	$\frac{41}{8}$	$\frac{47}{8}$	$\frac{47}{8}$
R	1.75	2.55	3.82	4.95	5.73	7.50	9.40	9.40	9.40	9.40	12.00	13.75	13.75
Load Capacity Lbs. Ø	3600	7300	14000	19200	36900	34000	33000	34900	33800	36900	83500	102600	108400

	Eye Bracket and Mounting Plate Part Number										
	74077	69195	69196	85361*	69198	85362*	85363*	85364*	85365*	73538	73539
CB	$\frac{5}{16}$	$\frac{3}{4}$	$\frac{1}{4}$	$\frac{11}{2}$	2	$\frac{21}{2}$	$\frac{21}{2}$	3	3	4	$\frac{41}{2}$
CD	$\frac{5}{16}$	$\frac{1}{2}$	$\frac{3}{4}$	1	$\frac{13}{8}$	$\frac{13}{4}$	2	$\frac{21}{2}$	3	$\frac{31}{2}$	4
DD	$\frac{17}{64}$	$\frac{13}{32}$	$\frac{17}{32}$	$\frac{21}{32}$	$\frac{21}{32}$	$\frac{29}{32}$	$\frac{11}{16}$	$\frac{13}{16}$	$\frac{15}{16}$	$\frac{113}{16}$	$\frac{21}{16}$
E	$\frac{21}{4}$	$\frac{21}{2}$	$\frac{31}{2}$	$\frac{41}{2}$	5	$\frac{61}{2}$	$\frac{71}{2}$	$\frac{81}{2}$	$\frac{91}{2}$	$\frac{125}{8}$	$\frac{147}{8}$
F	$\frac{3}{8}$	$\frac{3}{8}$	$\frac{5}{8}$	$\frac{7}{8}$	$\frac{7}{8}$	$\frac{11}{8}$	$\frac{11}{2}$	$\frac{13}{4}$	2	$\frac{111}{16}$	$\frac{115}{16}$
FL	1	$\frac{11}{8}$	$\frac{17}{8}$	$\frac{23}{8}$	3	$\frac{33}{8}$	4	$\frac{43}{4}$	$\frac{51}{4}$	$\frac{511}{16}$	$\frac{671}{16}$
LR	$\frac{5}{8}$	$\frac{3}{4}$	$\frac{11}{4}$	$\frac{11}{2}$	$\frac{21}{8}$	$\frac{21}{4}$	$\frac{21}{2}$	3	$\frac{31}{4}$	4	$\frac{41}{2}$
M	$\frac{3}{8}$	$\frac{1}{2}$	$\frac{3}{4}$	1	$\frac{13}{8}$	$\frac{13}{4}$	2	$\frac{21}{2}$	$\frac{23}{4}$	$\frac{31}{2}$	4
MR	$\frac{1}{2}$	$\frac{9}{16}$	$\frac{7}{8}$	$\frac{11}{4}$	$\frac{15}{8}$	$\frac{21}{8}$	$\frac{27}{16}$	3	$\frac{31}{4}$	$\frac{41}{8}$	$\frac{51}{4}$
R	1.75	1.63	2.55	3.25	3.82	4.95	5.73	6.58	7.50	9.62	11.45
Load Capacity Lbs. Ø	1700	4100	10500	20400	21200	49480	70000	94200	121900	57400	75000

	Pivot Pin Part Number													
	74078	68368	68369	68370	68371	68372	68373	69215	68374	68375	69216	73545	82181	73547*
CD	7/16	1/2	3/4	1	1 3/8	1 3/4	2	2	2 1/2	3	3	3 1/2	4	4
CL	1 5/16	1 7/8	2 5/8	3 1/8	4 1/8	5 3/16	5 3/16	5 11/16	6 3/16	6 1/4	6 3/4	8 1/4	8 5/8	9
Shear Capacity Lbs.	6600	8600	19300	34300	65000	105200	137400	137400	214700	309200	309200	420900	565800	565800

*Cylinder accessory dimensions conform to NFPA recommended standard NFPA/T3.6.8 R1-1984, NFPA recommended standard fluid power systems — cylinder — dimensions for accessories for cataloged square head industrial types. Parker adopted this standard in April, 1985. Eye Brackets or Mounting Plates shipped before this date may have different dimensions and will not necessarily interchange with the NFPA standard. For dimensional information on older style Eye Brackets or Mounting Plates consult Drawing #144805 or previous issues of this catalog.

Ø See Accessory Load Capacity note on previous page.

*These sizes supplied with cotter pins.

†Includes Pivot Pin.

Consult appropriate cylinder rod end dimensions for compatibility.




Parker “Style 55” Piston Rod End

**Rod end split coupling for Parker
Series MH Hydraulic**

- Simplifies alignment
- Reduces assembly time
- Allows full rated hydraulic pressure in push and pull directions
- Available in 5/8" through 10" piston rod diameters

Style 55 Rod End

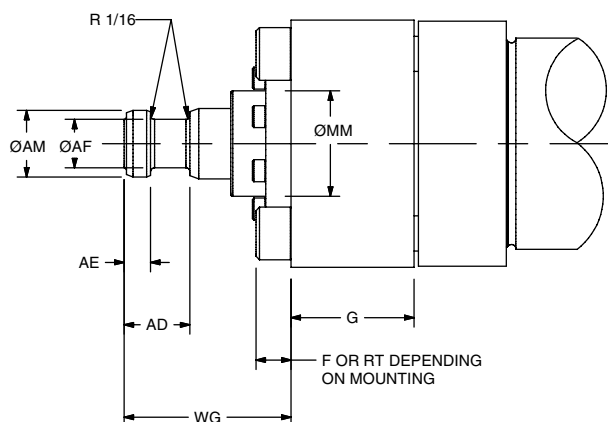

Dimensions Style 55 Rod End

MM Rod Dia.	AD	AE	AF	AM	WG
5/8	5/8	1/4	3/8	.57	1 3/4
1	15/16	3/8	1 1/16	.95	2 3/8
1 3/8	1 1/16	3/8	7/8	1.32	2 3/4
1 3/4	1 5/16	1/2	1 1/8	1.70	3 1/8
2	1 11/16	5/8	1 3/8	1.95	3 3/4
2 1/2	1 15/16	3/4	1 3/4	2.45	4 1/2
3	2 7/16	7/8	2 1/4	2.95	4 7/8
3 1/2	2 11/16	1	2 1/2	3.45	5 5/8
4	2 11/16	1	3	3.95	5 3/4
4 1/2	3 3/16	1 1/2	3 1/2	4.45	6 1/2
5	3 3/16	1 1/2	3 7/8	4.95	6 5/8
5 1/2	3 5/16	1 7/8	4 3/8	5.45	7 1/2
7	4 1/16	2	5 3/4	6.95	8 7/16
8	4 1/16	2	6 1/2	7.95	8 11/16
9	4 5/8	2 3/8	7 1/4	8.95	8 3/4
10	4 5/8	2 3/8	8	9.95	9 3/4

See Cylinder Catalog for F, G and RT per bore and series.


Consult Factory for availability of mounting accessories and Hardware

How To Order

Complete Model Number and place a “55” in the Piston Rod End designator position

Example: 6.0JMMHKT355X12.0

Parker “Style 55” Piston Rod End Split Couplers and Weld Plates

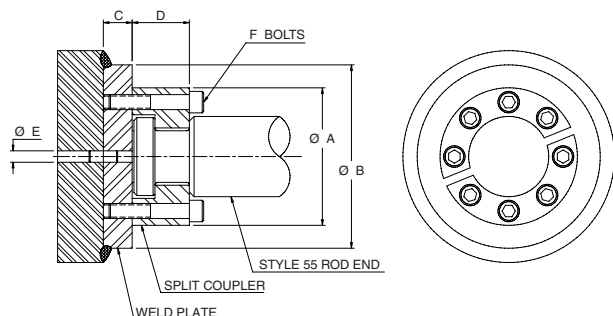

WARNING: Piston rod separation from the machine member can result in severe personal injury or even death to nearby personnel. The cylinder user must make sure the weld holding the weld plate to the machine is of sufficient quality and size to hold the intended load. The cylinder user must also make sure the bolts holding split coupler to the weld plate are of sufficient strength to hold the intended load and installed in such a way that they will not become loose during the machine's operation.

Table 1 — Part Numbers and Dimensions

ROD DIA.	A	B	C	D	E	F	BOLT SIZE	BOLT CIRCLE	SPLIT COUPLER PART NO.	WELD PLATE PART NO.
.625	1.50	2.00	.50	.56	.250	4	#10-24 x .94 LG	1.125	147234 0062	148174 0062
1.00	2.00	2.50	.50	.88	.250	6	.250-20 x 1.25 LG	1.500	147234 0100	148174 0100
1.375	2.50	3.00	.63	1.00	.250	6	.312-18 x 1.50 LG	2.000	147234 0138	148174 0138
1.75	3.00	4.00	.63	1.25	.250	8	.312-18 x 1.75 LG	2.375	147234 0175	148174 0175
2.00	3.50	4.00	.75	1.63	.375	12	.375-16 x 2.25 LG	2.687	147234 0200	148174 0200
2.50	4.00	4.50	.75	1.88	.375	12	.375-16 x 2.50 LG	3.187	147234 0250	148174 0250
3.00	5.00	5.50	1.00	2.38	.375	12	.500-13 x 3.25 LG	4.000	147234 0300	148174 0300
3.50	5.88	7.00	1.00	2.63	.375	12	.625-11 x 3.50 LG	4.687	147234 0350	148174 0350
4.00	6.38	7.00	1.00	2.63	.375	12	.625-11 x 3.50 LG	5.187	147234 0400	148174 0400
4.50	6.88	8.00	1.00	3.13	.375	12	.625-11 x 4.00 LG	5.687	147234 0450	148174 0450
5.00	7.38	8.00	1.00	3.13	.375	12	.625-11 x 4.00 LG	6.187	147234 0500	148174 0500
5.50	8.25	9.00	1.25	3.88	.375	12	.750-10 x 5.00 LG	6.875	147234 0550	148174 0550

Note: Screws are not included with split coupler or weld plate.

Linear Alignment Couplers are available in 12 standard thread sizes...

Cost Saving Features and Benefits Include...

- Maximum reliability for trouble-free operation, long life and lower operating costs
- Increased cylinder life by reducing wear on Piston and Rod bearings
- Simplifying Cylinder installation and reducing assembly costs
- Increase Rod Bearing and Rod Seal life for lower maintenance costs

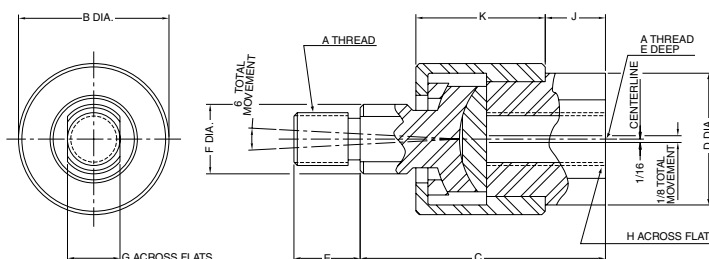


Table 1 — Part Numbers and Dimensions


Part No.	A	B	C*	D	E	F	G	H	J	K	Max. Pull Load (lbs.)	Approx. Weight (lbs.)
1347570031	⁵ / ₁₆ -24	1 ¹ / ₈	1 ³ / ₄	¹⁵ / ₁₆	¹ / ₂	¹ / ₂	³ / ₈	³ / ₄	³ / ₈	¹⁵ / ₁₆	1200	.35
1347570038	³ / ₈ -24	1 ¹ / ₈	1 ³ / ₄	¹⁵ / ₁₆	¹ / ₂	¹ / ₂	³ / ₈	³ / ₄	³ / ₈	¹⁵ / ₁₆	2425	.35
1347570044	⁷ / ₁₆ -20	1 ³ / ₈	2	1 ¹ / ₈	³ / ₄	⁵ / ₈	¹ / ₂	⁷ / ₈	³ / ₈	1 ³ / ₃₂	3250	.55
1347570050	¹ / ₂ -20	1 ³ / ₈	2	1 ¹ / ₈	³ / ₄	⁵ / ₈	¹ / ₂	⁷ / ₈	³ / ₈	1 ³ / ₃₂	4450	.55
1347570063	⁵ / ₈ -18	1 ³ / ₈	2	1 ¹ / ₈	³ / ₄	⁵ / ₈	¹ / ₂	⁷ / ₈	³ / ₈	1 ³ / ₃₂	6800	.55
1347570075	³ / ₄ -16	2	2 ⁵ / ₁₆	1 ⁵ / ₈	1 ¹ / ₈	¹⁵ / ₁₆	³ / ₄	1 ⁵ / ₁₆	⁷ / ₁₆	1 ⁹ / ₃₂	9050	1.4
1347570088	⁷ / ₈ -14	2	2 ⁵ / ₁₆	1 ⁵ / ₈	1 ¹ / ₈	¹⁵ / ₁₆	³ / ₄	1 ⁵ / ₁₆	⁷ / ₁₆	1 ⁹ / ₃₂	14450	1.4
1347570100	1-14	3 ¹ / ₈	3	2 ³ / ₈	1 ⁵ / ₈	1 ⁷ / ₁₆	1 ¹ / ₄	1 ⁷ / ₈	³ / ₄	1 ²⁵ / ₃₂	19425	4.8
1347570125	1 ¹ / ₄ -12	3 ¹ / ₈	3	2 ³ / ₈	1 ⁵ / ₈	1 ⁷ / ₁₆	1 ¹ / ₄	1 ⁷ / ₈	³ / ₄	1 ²⁵ / ₃₂	30500	4.8
1337390125	1 ¹ / ₄ -12	3 ¹ / ₂	4	2	2	1 ¹ / ₂	1 ¹ / ₄	1 ¹¹ / ₁₆	³ / ₄	2 ¹ / ₂	30500	6.9
1337390150	1 ¹ / ₂ -12	4	4 ³ / ₈	2 ¹ / ₄	2 ¹ / ₄	1 ³ / ₄	1 ¹ / ₂	1 ¹⁵ / ₁₆	⁷ / ₈	2 ³ / ₄	45750	9.8
1337390175	1 ³ / ₄ -12	4	4 ³ / ₈	2 ¹ / ₄	2 ¹ / ₄	1 ³ / ₄	1 ¹ / ₂	1 ¹⁵ / ₁₆	⁷ / ₈	2 ³ / ₄	58350	9.8
1337390188	1 ⁷ / ₈ -12	5	5 ⁵ / ₈	3	3	2 ¹ / ₄	1 ¹⁵ / ₁₆	2 ⁵ / ₈	1 ³ / ₈	3 ³ / ₈	67550	19.8

Spherical Bearing Mounting Accessories

Parker offers a complete range of Cylinder Accessories to assure you of the greatest versatility in present or future cylinder applications. Accessories offered for the respective cylinder include the Rod Eye,

Pivot Pin and Clevis Bracket. To select the proper part number for any desired accessory refer to the charts below.


Spherical Rod Eye

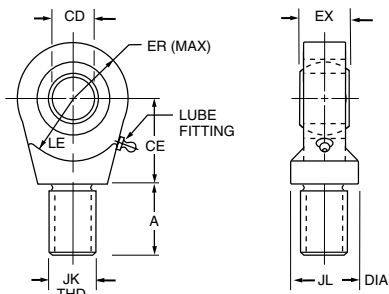

Bore Sizes	Series MH	1 1/2	2 & 2 1/2	3 1/4	4	5	6
Rod Eye	Part No.	132290	132291	132292	132293	132294	132295
CD		.5000 ⁻⁰⁰⁰⁵	.7500 ⁻⁰⁰⁰⁵	1.0000 ⁻⁰⁰⁰⁵	1.3750 ⁻⁰⁰⁰⁵	1.7500 ⁻⁰⁰⁰⁵	2.0000 ⁻⁰⁰⁰⁵
A		1 11/16	1	1 1/2	2	2 1/8	2 7/8
CE		7/8	1 1/4	1 7/8	2 1/8	2 1/2	2 3/4
EX		7/16	2 1/32	7/8	1 3/16	1 17/32	1 3/4
ER		1 3/16	1 1/8	1 1/4	1 11/16	2 1/16	2 1/2
LE		3/4	1 1/16	1 7/16	1 7/8	2 1/8	2 1/2
JK		7/16-20	3/4-16	1-14	1 1/4-12	1 1/2-12	1 7/8-12
JL		7/8	1 5/16	1 1/2	2	2 1/4	2 3/4
LOAD CAPACITY LBS.		2644	9441	16860	28562	43005	70193

Order to fit Piston Rod Thread Size.


Pivot Pin

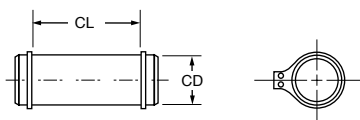

Bore Sizes	Series MH	1 1/2	2 & 2 1/2	3 1/4	4	5	6
Pivot Pin	Part No.	83962	83963	83964	83965	83966	83967
CD		.4997 ⁻⁰⁰⁰⁴	.7497 ⁻⁰⁰⁰⁵	.9997 ⁻⁰⁰⁰⁵	1.3746 ⁻⁰⁰⁰⁶	1.7496 ⁻⁰⁰⁰⁶	1.9996 ⁻⁰⁰⁰⁷
CL		1 9/16	2 1/32	2 1/2	3 5/16	4 7/32	4 15/16
SHEAR CAPACITY LBS.		8600	19300	34300	65000	105200	137400

Pivot Pins are furnished with (2) Retainer Rings.

Clevis Bracket

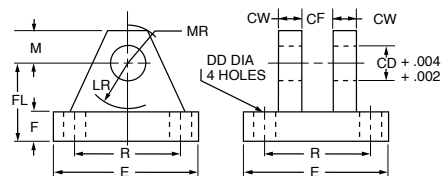


Bore Sizes	Series MH	1 1/2	2 & 2 1/2	3 1/4	4	5	6
Clevis Bracket	Part No.	83947	83948	83949	83950	83951	83952
CD		1 1/2	3/4	1	1 3/8	1 3/4	2
CF		7/16	2 1/32	7/8	1 3/16	1 17/32	1 3/4
CW		1 1/2	5/8	3/4	1	1 1/4	1 1/2
DD		1 3/32	1 7/32	1 7/32	2 1/32	2 29/32	2 29/32
E		3	3 3/4	5 1/2	6 1/2	8 1/2	10 5/8
F		1 1/2	5/8	3/4	7/8	1 1/4	1 1/2
FL		1 1/2	2	2 1/2	3 1/2	4 1/2	5
LR		1 5/16	1 3/8	1 11/16	2 7/16	2 7/8	3 5/16
M		1 1/2	7/8	1	1 3/8	1 3/4	2
MR		5/8	1	1 3/16	1 5/8	2 1/16	2 3/8
R		2.05	2.76	4.10	4.95	6.58	7.92
LOAD CAPACITY LBS.		5770	9450	14300	20322	37800	50375


Order to fit Mounting Plate or Rod Eye.

Mounting Information

Head End Mounting

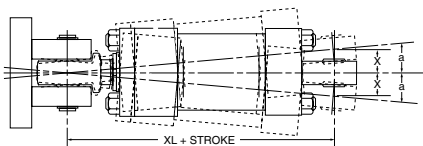

Cap End Mounting

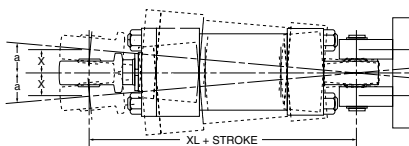

Recommended maximum swivel angle on each side of the cylinder centerline.

Table 1

Bore	Head End Mounted		Cap End Mounted	
	Angle a	Tan. of a	Angle a	Tan. of a
1 1/2	2°	.035	2°	.035
2	2 1/2°	.044	4 1/2°	.079
2 1/2	2 1/2°	.044	4 1/2°	.079
3 1/4	3°	.052	3°	.052
4	2 1/2°	.044	3°	.052
5	3°	.052	3°	.052
6	3°	.052	3°	.052

Note: Dimension X is the maximum off center mounting of the cylinder. To determine dimension X for various stroke lengths multiply the distance between pivot pin holes by tangent of angle a. For extended position use X = XL times 2X stroke.

Modifications

Metallic Rod Wiper


When specified metallic rod wipers can be supplied instead of the standard synthetic rubber wiperseal. Recommended in applications where contaminants tend to cling to the extended piston rod and would damage the synthetic rubber wiperseal. Installation of metallic rod wiper does not affect cylinder dimensions. It is available at extra cost.

Gland Drain

Hydraulic fluids tend to adhere to the piston rods during the extend stroke and an accumulation of fluid can collect in the cavity behind the wiperseal on long stroke cylinders.

An SAE #4 gland drain port can be provided in the gland retainer. A passage in the gland between the wiperseal and rod seal is provided to drain off any accumulation of fluid between the seals. See drawing below.

It is recommended that the gland drain port be piped back to the fluid reservoir and that the reservoir be located below the level of the head of the cylinder.

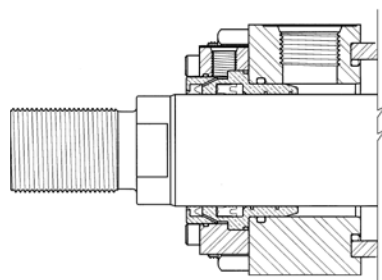

Air Bleeds

In most hydraulic circuits, cylinders are considered self-bleeding when cycled full stroke. If air bleeds are required and specified, 1/8" NPTF Air Bleed Ports for venting air can be provided at both ends of the cylinder body, or on the head or cap. To order, specify "Bleed Port", and indicate position desired.

Heavy Duty Mill Hydraulic Cylinder Series MH

Rod End Boots

Cylinders have a hardened bearing surface on the piston rod to resist external damage, and are equipped with the high efficiency "Wiperseal" to remove external dust and dirt. Exposed piston rods that are subjected to contaminants with air hardening properties, such as paint, should be protected. In such applications, the use of a collapsing cover should be considered. This is commonly referred to as a "boot". Calculate the longer rod end required to accommodate the collapsed length of the boot from the following data.


LF	.13	.13	.13	.13	.13	.13	.13	.10	.10	.10	.10	.10
OD	2 1/4	2 1/4	2 5/8	3	3 3/8	3 3/4	4 3/8	5 1/8	5 5/8	6 1/4	7	7 1/2
RD	1/2	5/8	1	1 3/8	1 3/4	2	2 1/2	3	3 1/2	4	5	5 1/2

To determine extra length of piston rod required to accommodate boot, calculate


$$BL = \text{Stroke} \times LF + 1\frac{1}{8}"$$

$$BL + VA + C = WF \text{ for piston rod with rod boot.}$$

NOTE: Check all Boot O.D's against std. "E" dimension from catalog. This may be critical on foot mounted cylinders.

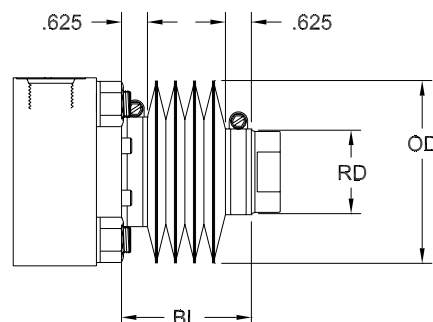

Parker EPS-7 Solid State Proximity Switches

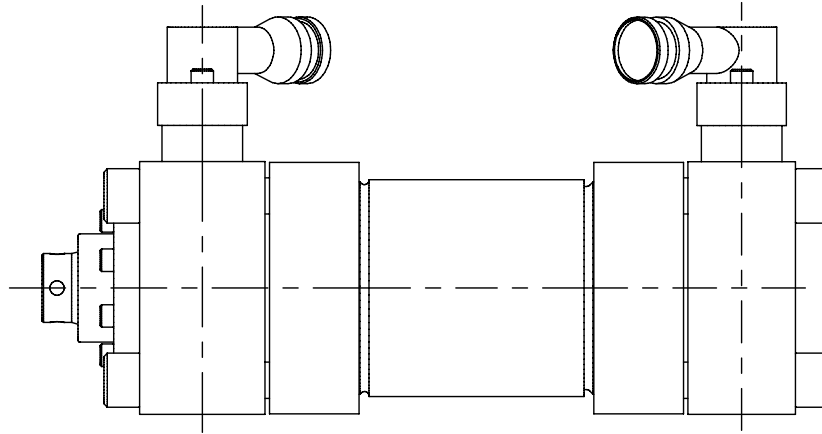

The Parker EPS-7 is an inductive type proximity switch that provides full extend or retract indication. The completely solid state electronics are epoxy potted in housings that meet enclosure types listed below. The non-contact probe senses the presence of the ferrous cushion spear or sleeve. There are no cams, plungers, mechanical switches or dynamic seals to wear out or go out of adjustment. By mounting the EPS proximity switch in the cylinder head or cap, costly design and set-up time associated with external limit switches is eliminated. Also, since the probe is sealed within the cylinder body the switch cannot be tampered with. The EPS meets UL requirements and is designed to operate within one inch of resistance welder tips carrying 20,000 Amperes.

The standard Parker EPS-7 is a 2-wire AC/DC switch which will operate from 20 to 250 VAC/DC.

The low 1.7 mA off-state leakage current allows the EPS to operate relay coil loads or act as a direct input into a PLC. The standard short circuit protection protects the switch from shorts in the load or line. Upon sensing a short condition (5 Amp or greater current) the switch assumes a non-conducting mode. The fault condition must be removed and the power removed to reset, preventing automatic restarts.

A ready LED indicator illuminates to indicate that the power is on and the switch is not conducting. The target LED will illuminate when the switch is activated. One LED will flash to indicate a short circuit condition.


For more information or applications requiring intrinsically-safe switches contact the Parker Hannifin Cylinder Division.

Features


- Completely Solid State – no moving parts to wear out
- Low Leakage Current – directly compatible with programmable controllers
- Meets enclosure types IEC IP67
- UL Approved
- Standard Short Circuit Protection – operates safely near high magnetic fields such as those in welding equipment and large electric motors
- Shock and Vibration Resistant – withstands up to 30g's vibration to 2000 Hz

EPS-7 Heavy Duty Industrial Applications

For top view, see EPS-6.

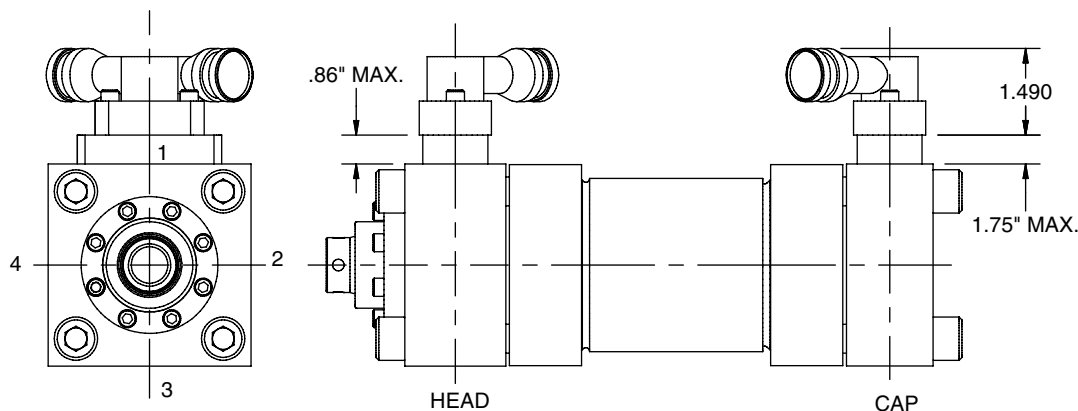

Wiring Diagrams and Information

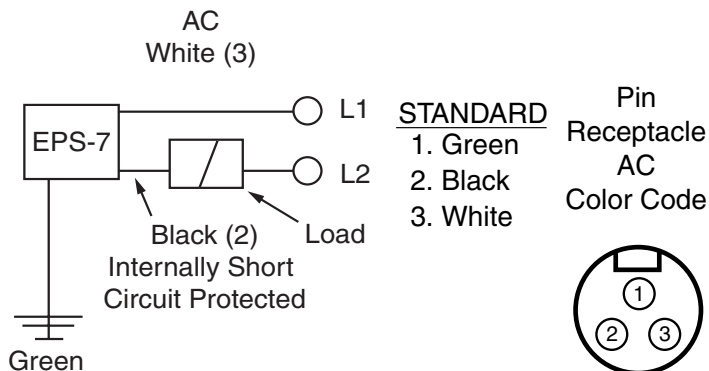

Connectors

The male quick disconnect on the Parker EPS-7 is a Brad Harrison 40909 connector.

Female connects must be purchased with one of the following cable lengths.

Parker Part No.	
Cable Length	Standard
3'	0853550003
6'	0853550006
9'	—
12'	0853550012

Series and Parallel Wiring

When Parker EPS-7 proximity switches are used as inputs to programmable controllers the preferred practice is to connect each switch to a separate input channel of the PC. Series or parallel operations may then be accomplished by the internal PC programming.


Parker EPS-6 or 7 switches may be hard wired for series operation, but the voltage drop through the switches (see specifications) must not drop the available voltage level below what is needed to actuate the load.

Parker EPS-6 or 7 switches may also be hard wired for parallel operation. However, the leakage current of each switch will pass through the load. The total of all leakage currents must not exceed the current required to actuate the load. In most cases, the use of two or more EPS-6 or 7 switches in parallel will require the use of a bypass (shunt) resistor.


Parker EPS-6 Low Voltage DC Proximity Switches

Features

- Low Leakage
- Short Circuit Protection
- PNP (Sourcing) and NPN (Sinking)
- Enclosure Rated NEMA 4, 6, 13

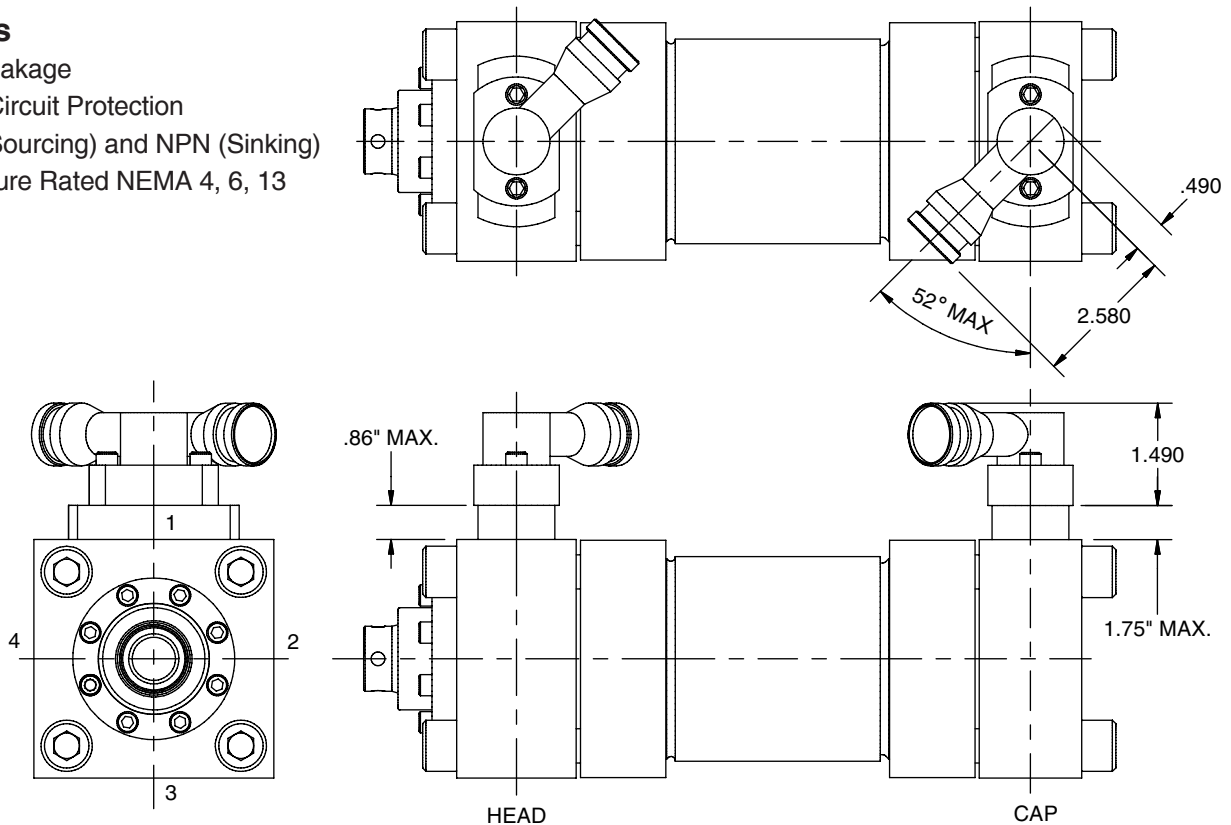

Wiring Diagrams and Information

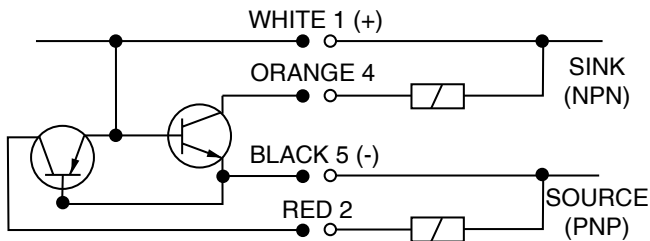


LED Function	"Ready"	"Target"
Power Applied (No Target)	ON	OFF
Target Present	OFF	ON
Short Circuit Condition	FLASH	FLASH

Connectors

The male quick disconnect on the Parker EPS-6 is a Brad Harrison 41310 connector.

Plug Pin and Cable Identification




- 1) +10 to 30 VDC (White)
- 2) Source (Red)
- 3) Grounded not connected nor required
- 4) Sink (Orange)
- 5) Common (Black)


Cable Length	Parker No.
3	085917 0003
6	085917 0006
12	085917 0012

Cylinder End-of-Stroke Proximity Sensors

CLS 1 & 4 Sensors

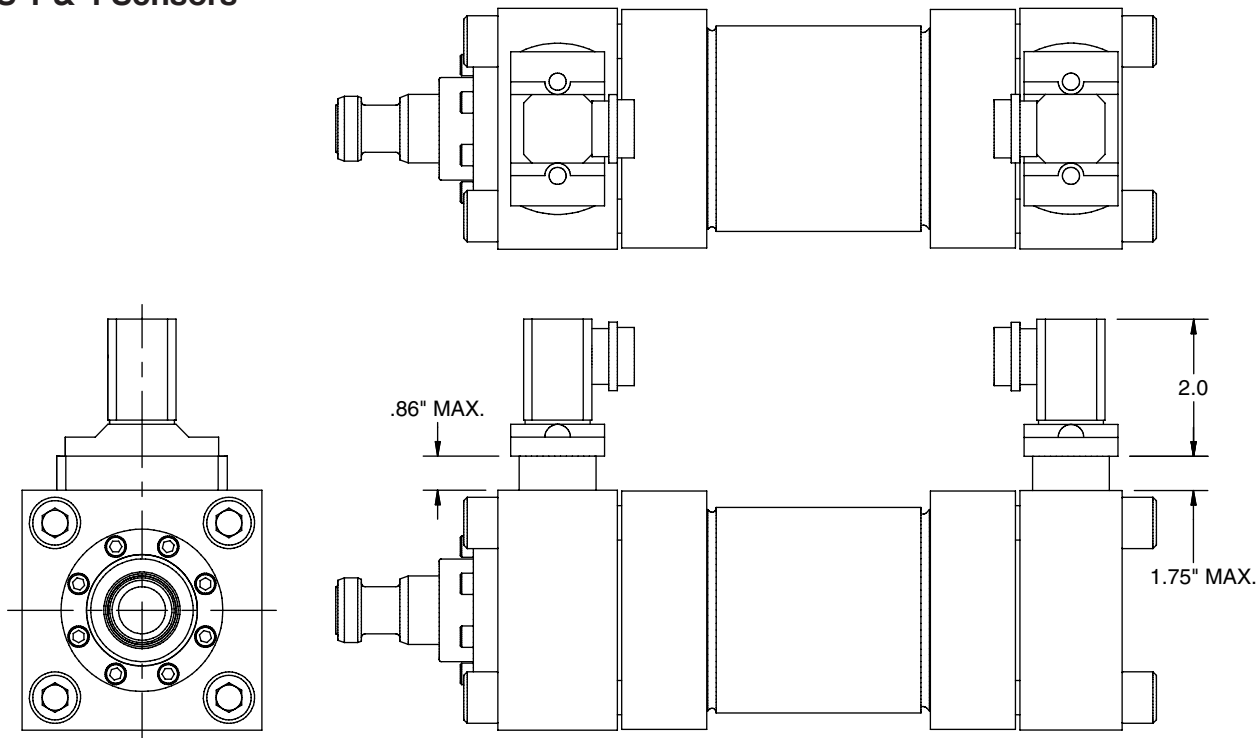

Wiring Diagrams and Information

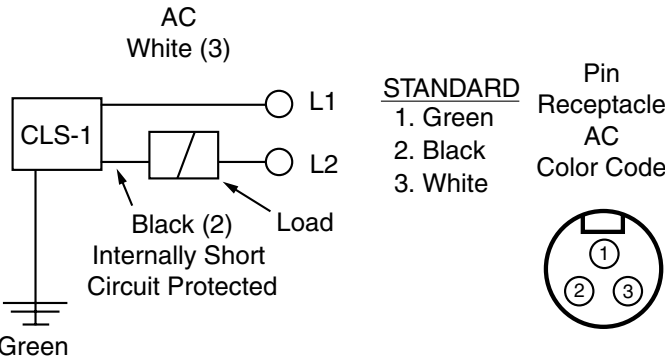

Connectors

The male quick disconnect on the Parker CLS-1 is a Brad Harrison 40909 connector.

Female connects must be purchased with one of the following cable lengths.

Cable Length	Parker Part No.
	Standard
3'	0853550003
6'	0853550006
9'	—
12'	0853550012

The connection for the CLS-4 are 144" PTFE insulated flying leads with 1/2" conduit hub. 3-wire: Common (black), Normally open (blue), and Normally closed (red).

Cylinder End-of-Stroke Proximity Sensors: Specifications				
Style:	EPS-7	EPS-6	CLS-1	CLS-4
Code Designator:	H	D	F	B
Description:	Economical, General Purpose, 2 wire device, primarily for 24 VDC applications.	Economical, General Purpose, 3 wire, DC sensor, dual output: sinking and sourcing	Functional replacement for AB (Mechanical) Limit Switches in many applications, or where customer needs NC contacts, zero leakage, zero voltage drop, higher or lower load current than EPS-style.	Functional replacement for AB (Mechanical) Limit Switches in many High Temperature applications, or where customer needs NC contacts, zero leakage, zero voltage drop, higher or lower load current than EPS-style.
Supply Voltage:	20 to 250 VAC/DC	10 to 30 VDC	24 to 240 VAC/DC	24 to 240 VAC/DC
Load Current, min:	8 mA	NA	NA	NA
Load Current, max:	300 mA	200 mA	4 AMPS @ 120 VAC 3 AMPS @ 24 VDC	4 AMPS @ 120 VAC 3 AMPS @ 24 VDC
Leakage Current:	1.7 mA, max.	10 micro amps max.	—	—
Voltage Drop:	7 V, max.	2 VDC max.	NA	NA
Operating Temperature:	-14° to +158°F	-14° to +158°F	-40°F to +221°F	-40°F to +400°F
Sensor Type:	Inductive Proximity	Inductive Proximity	Non-contacting magnetically actuated	Non-contacting magnetically actuated
Part Number:	148897****	148896****	148275****	149109****
Part Number Suffix**** :	****4-digit suffix indicates probe length: 0125=1.25", 0206=2.06", 0287=2.875", 0456=4.562"			
Connection:	3 pin mini	5 pin mini	3 pin mini	144" PTFE Coated Flying Leads with 1/2" conduit hub
Enclosure Rating:	IEC IP67	IEC IP67	NEMA 1, 2, 3, 4, 4x, 5, 6, 6P, 11, 12, 12K, 13	NEMA 1, 2, 3, 4, 4x, 5
LED Indication:	Yes	Yes	No	No
Short Circuit Protection:	Yes	Yes	No	No
Weld Field Immunity:	Yes	Yes	Yes	Yes
Output:	2 wire, Normally Open with leakage	Dual output: DC Sinking and DC Sourcing, user selectable via wiring	SPDT (Single Pole Double Throw), Normally Open/Normally Closed, Form C	SPDT (Single Pole Double Throw), Normally Open/Normally Closed, Form C
Approvals/Marks:	CE, UL, CSA	CE, UL, CSA	UL or CSA	UL or CSA
Make/Break Location:	0.125" from end of stroke, typical. Tolerance is ± .125.			
Wiring Instructions:	Pin 1: AC Ground (Green) Pin 2: Output (Black) Pin 3: AC Line (White)	Pin 1) +10 to 30 VDC (White) Pin 2) Sourcing Output (Red) Pin 3) Grounded (not connected or required) Pin 4) Sinking Output (Orange) Pin 5) DC Common (Black)	Pin 1: Common (Green) Pin 2: Normally Closed (Black) Pin 3: Normally Open (White)	Common: (Black) Normally Open: (Blue) Normally Closed: (Red)
Cable: 6'	085355-0006	085917-0006	085355-0006	—
Cable: 12'	085355-0012	085917-0012	085355-0012	—
Cable: 6', Right Angle	087547-0006	—	087547-0006	—

Cylinder End-of-Stroke Proximity Sensors – How to Order

Parker EPS proximity switches may be ordered as follows:

- 1) Complete the basic cylinder model number.
- 2) Place an “S” in the model number to denote switches and/or special features.
- 3) Mounting styles E, D, DB, JJ, JB, or HB should be used with caution because of possible mounting interferences. Consult bulletin 0840-G-E1 for additional information.
- 4) Special modifications to cylinders other than switches must have a written description.

How to Specify EPS Switches

- 5) Specify letter prefix “H” for EPS-7, “D” for EPS-6, and “F” for CLS-1, or “B” for CLS-4, then fill in the four blanks specifying port location, switch orientation and actuation point for both head and cap. If only one switch is used, place “XXXX” in the unused blanks.

Example = H13CGG-XXXX denotes a switch on the head end only, EPS-7

Example = BXXXX-42BGG denotes a switch on the cap end only, CLS-4


Head End

R	1	3	A	GG
Specify: “H” = EPS-7 “D” = EPS-6 “F” = CLS-1 “B” = CLS-4 “N” = Prep for switches only	Port Location See Figure 1.	Switch Location See Figure 1.	Switch Orientation See Figure 2 for EPS-7 and EPS-6 only.	Actuation Point GG = End of Stroke FF = Stroke to Go; Consult Bulletin 0840-G-E1 for stroke remaining.

Cap End

4	2	B	GG
Port Location See Figure 1.	Switch Location See Figure 1.	Switch Orientation* See Figure 2 for EPS-7 and EPS-6 only.	Actuation Point GG = End of Stroke FF = Stroke to Go; Consult Bulletin 0840-G-E1 for stroke remaining.


Note: All specified switch and port locations are as seen from rod end of cylinder.

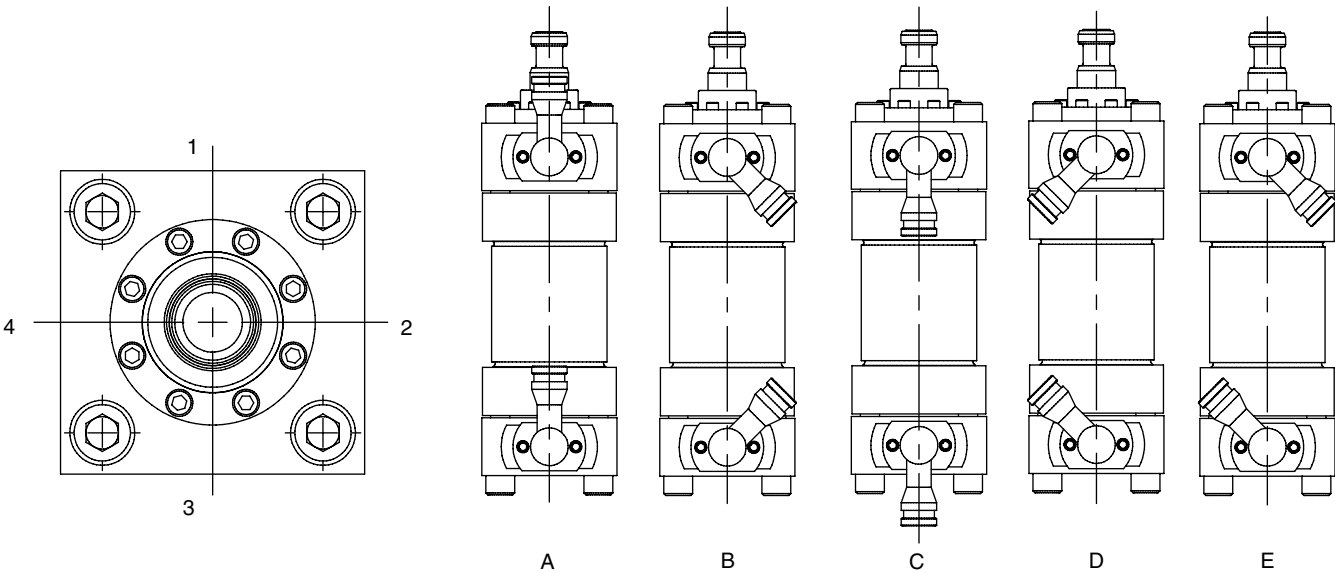

**Parker Series MH Hydraulic Cylinders
with Low Friction Seal Option
High Performance Cylinders for
Your Demanding Applications**

- Smooth-running operation – reduces “slip-stick” or “chatter”
- Ideally suited for use in servo applications
- Filled PTFE material for low friction, rapid break-in and long service life
- Innovative seal geometry for maximum sealing efficiency

Low Friction Rod Cartridge

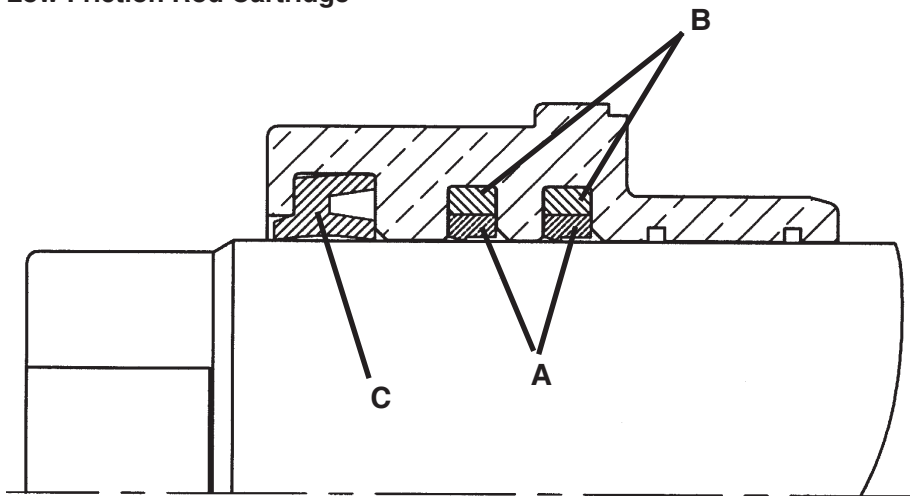


A - Dual step-seal rod seals insure positive sealing and smooth operation up to 2,000 PSI.

B - Elastomer expander for pressure compensation and low pressure effectiveness.

C - Dual lip wiper keeps contaminants out.

Low Friction Piston

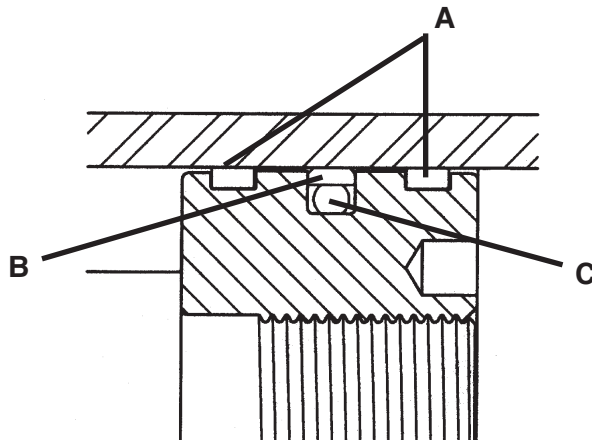


A - Dual filled PTFE piston bearings for high load capacity, low friction and no metal-to-metal contact.

B - Filled PTFE piston seal insures maximum sealing efficiency.

C - Elastomer expander for pressure compensation.

Seal Friction

Seal friction under a given set of working conditions is not easily calculated due to the multiplicity of variables involved. The following graphs are offered as a guide for use in performance calculations, but for critical application measurements should be made under simulated or actual working conditions.

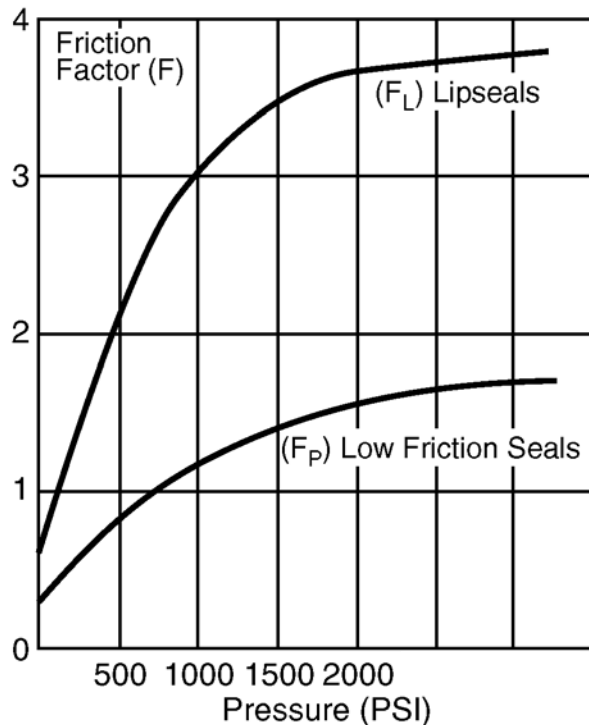**Calculation of Running Friction**

The seal friction attributable to the cylinder is calculated as the sum of the friction due to the individual sealing elements = (wiper seal friction + rod seal friction + piston seal friction), using the following formulae:

Seal Option:	Formula:
Lipseal Rod + Piston	$12d + 12 F_L d + 24 F^L D$
Lipseal Rod w/Low Friction Piston	$12d + 12 F_L d + 12 F^P D$
Low Friction Rod + Piston	$12 + 30 F_P d + 6 F^P D$

Where: d = rod dia. (in.) D = bore dia. (in.)
 F_L = friction factor for lipseals (F_L)
 F_P = friction factor for PTFE (F_P)

Breakaway Friction:

Breakaway friction may be calculated by applying the following correction factors:

Correction factors:
 Lipseals: $F_L \times 1.5$
 Low Friction: $F_P \times 1.0$

Sample Calculation:

MH Cylinder with 3.25 dia. bore + 1.75 dia. piston rod with low friction seals at 1500 PSI.

Running Friction Calculation:

$$\text{Friction (lbs. force)} \approx 12d + 30F_P d + 6F_P D$$

$$\text{Friction (lbs. force)} \approx 12(1.75) + 30(1.3 \times 1.75) + 6(1.3 \times 3.25)$$

$$\text{Friction (lbs. force)} \approx 115$$

Breakaway Friction Calculation:

$$F^P \times 1.0 \approx F_P$$

Based on zero pressure:

$$\text{Friction (lbs. force)} \approx 12d + 30F_P d + 6F_P D$$

$$\text{Friction (lbs. force)} \approx 12(1.75) + 30(.3 \times 1.75) + 6(.3 \times 3.25)$$

$$\text{Friction (lbs. force)} \approx 43$$

Specifications for Low Friction Option:

Operating Pressure: 0 - 2000 PSI

Operating Temperature: -10°F to +160°F.
 For higher temperatures, consult factory.

Fluid Media: Petroleum based hydraulic oils.
 For other fluids, consult factory.

How to Order Low Friction Option

When ordering series MH cylinders, place an "S" in the model number for "special" and specify the following:

"Low friction piston and rod seals."

Ports

Parker hydraulic and pneumatic cylinders can be supplied with S.A.E. straight O-ring ports or N.P.T.F. pipe thread ports. For the type of port recommended and port size, see respective product catalogs. If specified on your order, extra ports can be provided on the sides of heads or caps that are not occupied by mountings or cushion valves.

Standard port location is position 1 as shown on line drawings in product catalog and Figure 1 below. Cushion adjustment needle and check valves are at positions 2 and 4 (or 3), depending on mounting style. Heads or caps which do not have an integral mounting can be rotated and assembled with ports at 90° or 180° from standard position. Mounting styles on which head or cap can be rotated at no extra charge are shown in Table A below. To order, specify by position number. In such assemblies the cushion adjustment needle and check valve rotate accordingly, since their relationship with port position does not change.

Figure 1

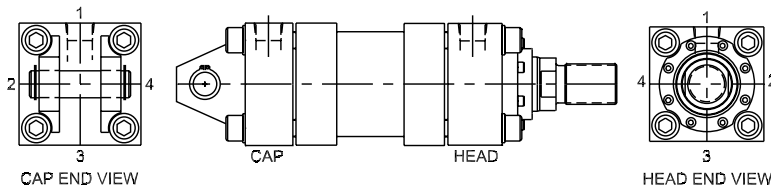


Table A

Mounting Style	Port Position Available	
	Head End	Cap End
HB, JB, DD	1, 2, 3 or 4	1, 2, 3 or 4
BE, BB, DB, HH, SB	1, 2, 3 or 4	1 or 3
D, JJ	1 or 3	1, 2, 3 or 4
C, E, F	1	1

Ports can be supplied at positions other than those shown in Table A at an extra charge. To order, specify port position as shown in Figure 1.

Cylinder Port Options

- Option "T" SAE Straight Thread O-Ring Port.
Recommended for most hydraulic applications.
- Option "U" Conventional NPTF Ports (Dry-Seal Pipe Threads). Recommended for pneumatic applications only.
- Option "R" BSPP Port (British Parallel Thread). ISO 228 port commonly used in Europe.
See Figure R-G below.
- Option "P" SAE Flange Ports Code 61 (3000 psi).
Recommended for hydraulic applications requiring larger port sizes.
- Option "B" BSPT (British Tapered Thread).
- Option "G" Metric Straight Thread Port similar to Option "R" with metric thread. Popular in some European applications. See Figure R-G below.
- Option "Y" ISO-6149-1 Metric Straight Thread Port.
Recommended for all hydraulic applications designed per ISO standards.
See Figure Y below.

Figure R-G


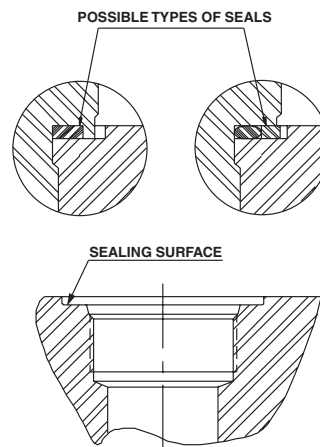


Figure Y

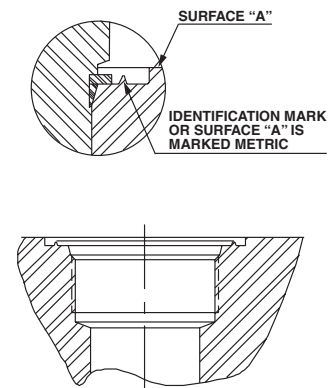

Available Ports for MH Series Cylinders

Bore	"T" SAE Standard	"U" NPTF Pipe Thread	"R" BSPP Parallel Thread	"P" SAE 4-Bolt Flange Nom. Size	"B" BSPT Taper Thread	"G" Metric Straight Thread	"Y" ISO-6149-1 Metric Straight Thread
1 1/2	#8	1/2	1/2	N/A	1/2	M22 x 1.5	M22 x 1.5
2	#8	1/2	1/2	N/A	1/2	M22 x 1.5	M22 x 1.5
2 1/2	#8	1/2	1/2	1/2	1/2	M22 x 1.5	M22 x 1.5
3 1/4	#12	3/4	3/4	3/4	3/4	M27 x 2	M27 x 2
4	#12	3/4	3/4	3/4	3/4	M27 x 2	M27 x 2
5	#12	3/4	3/4	3/4	3/4	M27 x 2	M27 x 2
6	#16	1	1	1	1	M33 x 2	M33 x 2
7	#20	1 1/4	1 1/4	1 1/4	1 1/4	M42 x 2	M42 x 2
8	#24	1 1/2	1 1/2	1 1/2	1 1/2	M48 x 2	M48 x 2
10	#24	1 1/2	1 1/2	2	1 1/2	M48 x 2	M48 x 2
12	#24	1 1/2	1 1/2	2 1/2	1 1/2	M48 x 2	M48 x 2
14	#24	1 1/2	1 1/2	2 1/2	1 1/2	M48 x 2	M48 x 2

HYDRAULIC CYLINDER SPEEDS

Figures in the body of this chart are cylinder rod travel speeds in "inches per minute." Lines with rod diameter as NONE are extension speeds, using the full piston area. Lines with rod diameters are retraction speeds, using "net" piston area

CYL BORE	ROD DIA	1 GPM	3 GPM	5 GPM	8 GPM	12 GPM	15 GPM	20 GPM	25 GPM	30 GPM	40 GPM	50 GPM	75 GPM
1½	NONE	130	392	654	1034								
	5/8	158	476	792	1265								
	1	235	706	1176	1880								
2	NONE	73	221	368	588	883	1120						
	1	97	294	490	782	1175	1465						
	1⅜	139	418	697	1115	1673	2090						
2½	NONE	47	141	235	376	565	675	940	1175				
	1	56	168	280	448	672	840	1120	1400				
	1⅜	67	203	339	542	813	1015	1355	1695				
	1¾	92	277	463	740	1110	1385	1850	2310				
3¼	NONE	28	83	139	223	334	417	557	696	836	1115		
	1⅜	34	102	170	271	407	510	680	850	1020	1360		
	1¾	39	118	196	313	472	588	784	980	1176	1568		
	2	44	134	224	358	537	672	896	1120	1344	1792		
4	NONE	18	55	92	147	220	276	368	460	552	736	920	
	1¾	22	68	113	182	273	339	452	565	678	904	1130	
	2	24	73	122	196	294	366	488	610	732	976	1220	
	2½	30	90	150	241	362	450	600	750	900	1200	1500	
5	NONE	12	35	58	94	141	174	232	290	348	464	500	870
	2	14	42	70	112	168	210	280	350	420	560	700	1050
	2½	16	47	78	125	188	235	315	390	470	630	780	1170
	3	18	55	92	147	221	276	368	460	551	735	919	1379
6	3½	22	66	111	178	266	333	444	555	665	888	1110	1665
	NONE	8	24	41	65	98	123	162	202	245	320	405	606
	2½	10	30	50	79	118	150	200	250	300	400	495	750
	3	11	33	54	87	130	165	217	270	325	435	545	810
7	3½	12	37	62	99	149	186	248	310	372	495	619	929
	4	15	44	73	117	176	220	295	365	440	585	735	1095
	NONE	6	18	30	48	72	90	120	150	180	240	300	450
	3	7	22	37	59	88	110	145	185	220	295	365	555
8	3½	8	24	40	64	96	120	160	200	240	320	400	600
	4	9	27	45	71	107	134	178	223	267	357	446	668
	4½	10	31	51	82	123	153	205	256	307	409	512	767
	5	12	37	61	98	147	185	245	305	370	490	615	915
10	NONE	4	14	23	36	55	69	92	115	135	185	230	345
	3½	5.5	17	28	45	68	85	115	140	170	230	285	420
	4	6	18	30	49	73	90	122	150	180	240	305	450
	4½	7	20	34	54	81	101	134	168	202	269	336	504
	5	8	23	38	60	90	113	151	189	226	302	377	566
12	5½	8.5	26	43	70	104	129	172	215	255	345	430	645
	NONE	3	9	15	23	35	44	60	73	88	115	145	220
	4½	3.5	11	18	29	44	55	75	92	111	150	185	275
	5	4	12	20	31	47	59	78	98	118	157	196	294
	5½	4.5	13	21	34	50	63	84	105	132	165	210	315
14	7	5.5	17	29	46	69	87	115	145	174	230	285	435
	NONE	2	6	10	16	25	31	41	51	61	82	102	153
	5½	2.5	8	13	21	31	39	52	65	78	103	129	194
	7	3	9	15	25	37	46	62	77	93	124	155	232
	8	3.5	11	18	29	44	55	74	92	110	147	184	276
14	8½	4	12	20	33	49	61	82	102	123	164	205	307
	NONE	1.5	4.5	7.5	12.0	18.0	22.5	30.0	37.5	45.0	60.0	75.0	112.5
	7	2.0	6.0	10.0	16.0	24.0	30.0	40.0	50.0	60.0	80.0	100.0	150.0
14	8	2.22	6.7	11.0	17.8	26.7	33.4	44.5	55.7	66.8	89.0	111.4	167.0
	10	3.06	9.2	15.3	24.5	36.8	46.0	61.27	76.59	91.9	122.5	153.18	229.8

Acceleration and Deceleration Force Determination

The uniform acceleration force factor chart and the accompanying formula can be used to rapidly determine the forces required to accelerate and decelerate a cylinder load. To determine these forces, the following factors must be known: total weight to be moved, maximum piston speed, distance available to start or stop the weight (load), direction

of movement, i.e. horizontal or vertical, and load friction. By use of the known factors and the "g" factor from chart, the force necessary to accelerate or decelerate a cylinder load may be found by solving the formula (as shown in chart below) application to a given set of conditions.

Nomenclature

- V = Velocity in feet per minute
S = Distance in inches
F = Force in lbs.
W = Weight of load in pounds
g = Force factor
f = Friction of load on machine ways in pounds

To determine the force factor "g" from the chart, locate the intersection of the maximum piston velocity line and the line representing the available distance. Project downward to locate "g" on the horizontal axis. To calculate the "g" factor for distances and velocities exceeding those shown on the chart, the following formula can be used:

$$g = v^2/s \times .0000517$$

Example: Horizontal motion of a free moving 6,000 lb. load is required with a distance of $1/2$ " to a maximum speed of 120 feet per minute.

Formula (1) $F = Wg$ should be used.

$$F = 6,000 \text{ pounds} \times 1.50 \text{ (from chart)} = 9,000 \text{ pounds}$$

Assuming a maximum available pump pressure of 1,000 p.s.i., a 4" bore cylinder should be selected, operating on push stroke at approximately 750 p.s.i. pressure at the cylinder to allow for pressure losses from the pump to the cylinder.

Assume the same load to be sliding on ways with a coefficient of friction of 0.15. The resultant friction load would be $6,000 \times 0.15 = 900$ lbs.

Formula (2) $F = Wg + f$ should be used.

$$F = 6,000 \text{ lbs.} \times 1.5 \text{ (from chart)} + 900 = 9,900 \text{ lbs.}$$

Again allowing 750 p.s.i. pressure at the cylinder, a 5" bore cylinder is indicated.

Example: Horizontal deceleration of a 5000 pound load is required by using a 1" long cushion in a 5" bore cylinder having a $1\frac{3}{4}$ " diameter piston rod. Cylinder bore area (19.64 Sq. In.) minus the rod area results in a minor area of 17.23 Sq. In. at head end of cylinder. A pump delivering 500 p.s.i. at the cylinder is used to push the load at 120 feet per minute. Friction coefficient is 0.15 or 750 lbs.

In this example, the total deceleration force is the sum of the force needed to decelerate the 5,000 pounds load, and the force required to counteract the thrust produced by the pump.

- W = Load in lbs. = 5000
S = Deceleration distance in inches = 1"
V = Maximum piston speed in feet per minute = 120
g = .74 (from chart)
f = 750 pounds


Use formula (3) $F = Wg - f$

$$(F = Wg - f) = (F = 5000 \times .74 - 750) = 2,950 \text{ Pounds}$$

The pump is delivering 500 p.s.i. acting on the 19.64 Sq. In. piston area producing a force (F2) of 9820 pounds. This force must be included in our calculations. Thus $F + F2 = 2950 + 9820 = 12,770$ pounds total force to be decelerated.

The total deceleration force is developed by the fluid trapped between the piston and the head. The fluid pressure is equal to the force (12,770 pounds) divided by the minor area (17.23 Sq. In.) equals 741 p.s.i. This pressure should not exceed the non-shock rating of the cylinder.

Cushioning practice is to select a "g" factor between .2 and 1.5.

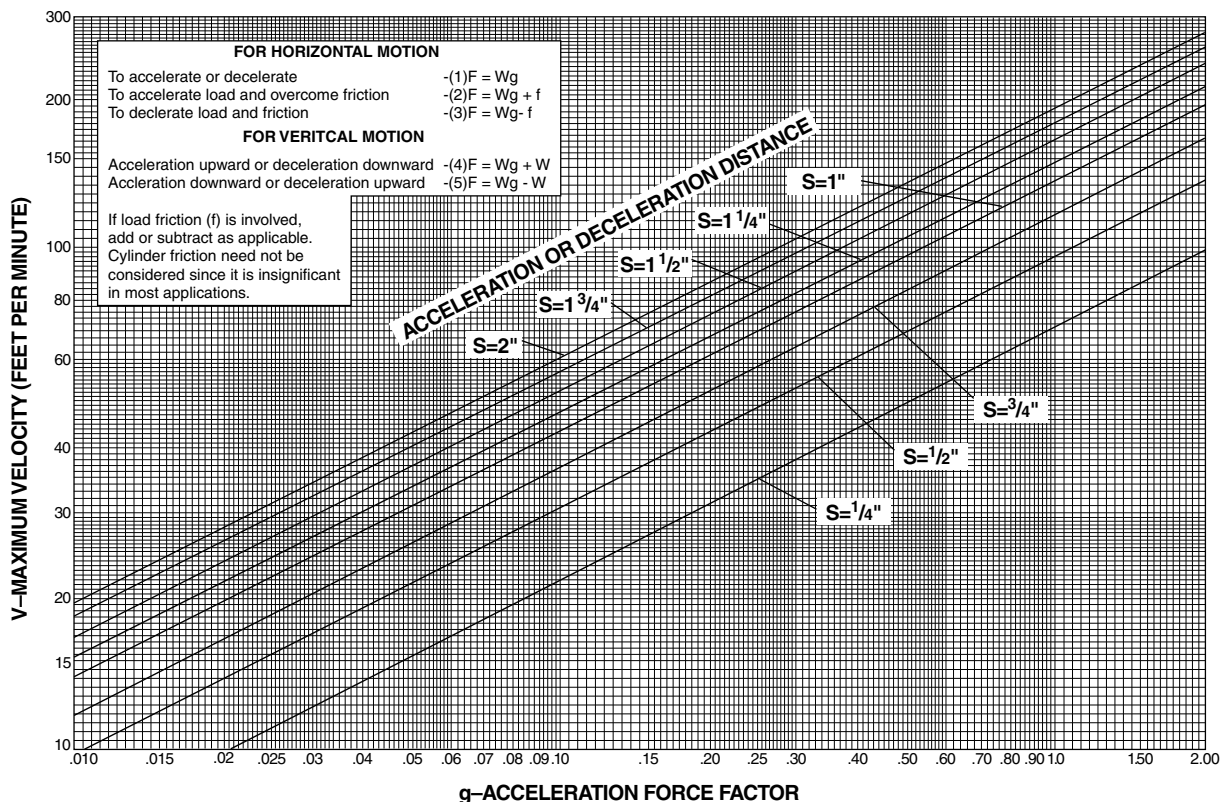

Stop Tubing

Stop Tubing

Stop tube is recommended to lengthen the distance between the gland and piston to reduce bearing loads when the cylinder is fully extended. This is especially true of horizontally mounted and long stroke cylinders. Long stroke cylinders achieve additional stability through the use of a stop tube. Drawing A below shows stop tube construction for a cushioned cylinder.

Non-cushioned cylinders use the same construction, but the cushion sleeves are eliminated. Dual piston stop tubes can also be utilized to add additional bearing when the stop tube length is significant. Refer to the chart to determine recommended stop tube length.

When specifying cylinders with long stroke and stop tube, be sure to call out the net stroke and the length of the stop tube. Machine design can be continued without delay by laying in a cylinder equivalent in length to the NET STROKE PLUS STOP TUBE LENGTH, which is referred to as GROSS STROKE.

Refer to piston rod/stroke selection chart to determine stop tube length.

Stop Tube Information: Max. Stroke per Mount

Bore	Case 1, 2 Rigid Mounts with rod support	Case 3 Rigid Mounts without support	Case 4, 5, 6 Pivot Mounts
1 1/2 & 2"	48 in.	30 in.	24 in.
2 1/2 to 4"	48 in.	38 in.	30 in.
5 to 14"	48 in.	40 in.	36 in.

Extra rod extension is added into stroke.

1" of stop tube for every 10" over maximum.

Heavy Duty Mill Hydraulic Cylinder Series MH

Mounting Classes

Standard mountings fall into three basic groups, which are summarized as follows:

Group 1 Straight line force transfer with fixed mounting which absorbs forces on the cylinder centerline.

Heavy duty service

thrust E, HB, HH

tension E, JB, JJ

Group 2 Pivot force transfer with mounting which permits alignment to change in a single plane along cylinder centerline. Stroke length will influence service rating.

Heavy duty service

thrust D, DD

tension BE, BB, D, DB, DD

Medium duty service

thrust BE, BB

Group 3 Straight line force transfer with fixed mounting which does not absorb force on the centerline.

Heavy duty service

thrust C


tension C

Medium duty service


thrust F

tension F

Drawing A

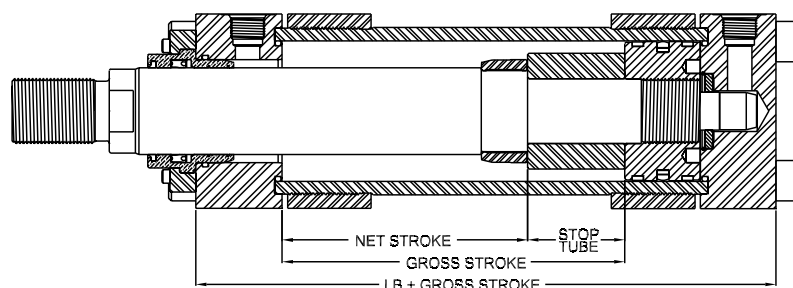

Thrust-Key Retainer Plate Option

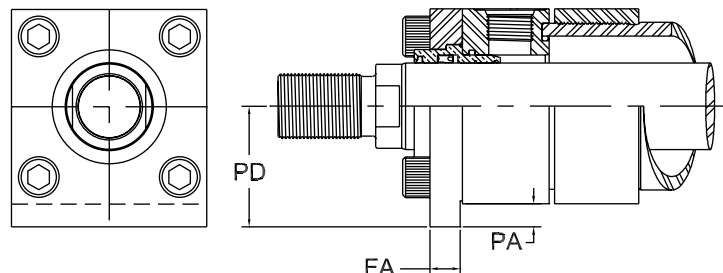

NOTE: A full retainer plate can be included as an option instead of the packing cap on bore sizes 1 1/2" through 6".

BORE	E	FA+.000	PA	PD
1.50	2.50	.312—-.002	.188	1.437
2.00	3.00	.562—-.002	.312	1.812
2.50	3.50	.562—-.002	.312	2.062
3.25	4.50	.687—-.003	.375	2.625
4.00	5.00	.812—-.003	.437	2.937
5.00	6.50	.812—-.003	.437	3.687
6.00	7.50	.937—-.003	.500	4.250
7.00	8.50	.937—-.003	.500	4.750
8.00	9.50	.937—-.003	.500	5.250

How to Use the Chart

The selection of a piston rod for thrust (push) conditions requires the following steps:

1. Determine the type of cylinder mounting style and rod end connection to be used. Then consult the chart below and find the "stroke factor" that corresponds to the conditions used.

2. Using this stroke factor, determine the "basic length" from the equation:

$$\text{Basic Length} = \frac{\text{Actual Stroke}}{\text{Stroke Factor}}$$

The graph is prepared for standard rod extensions beyond the face of the gland retainers. For rod extensions greater than standard, add the increase to the stroke in arriving at the "basic length."







3. Find the load imposed for the thrust application by multiplying the full bore area of the cylinder by the system pressure.
4. Enter the graph along the values of "basic length" and "thrust" as found above and note the point of intersection:

- A) The correct piston rod size is read from the diagonally curved line labeled "Rod Diameter" next above the point of intersection.

- B) The required length of stop tube is read from the right of the graph by following the shaded band in which the point of intersection lies.
- C) If required length of stop tube is in the region labeled "consult factory," submit the following information for an individual analysis:
 - 1) Cylinder mounting style.
 - 2) Rod end connection and method of guiding load.
 - 3) Bore, required stroke, length of rod extension (Dim. "LA") if greater than standard, and series of cylinder used.
 - 4) Mounting position of cylinder. (Note: If at an angle or vertical, specify direction of piston rod.)
 - 5) Operating pressure of cylinder if limited to less than standard pressure for cylinder selected.


⚠ Warning

Piston rods are not normally designed to absorb bending moments or loads which are perpendicular to the axis of piston rod motion. These additional loads can cause the piston rod end to fail. If these types of additional loads are expected to be imposed on the piston rods, their magnitude should be made known to our Engineering Department so they may be properly addressed. Additionally, cylinder users should always make sure that the piston rod is securely attached to the machine member.

Recommended Mounting Styles for Maximum Stroke and Thrust Loads	Rod End Connection	Case	Stroke Factor
Groups 1 or 3 Long stroke cylinders for thrust loads should be mounted using a heavy-duty mounting style at one end, firmly fixed and aligned to take the principal force. Additional mounting should be specified at the opposite end, which should be used for alignment and support. An intermediate support may also be desirable for long stroke cylinders mounted horizontally. Machine mounting pads can be adjustable for support mountings to achieve proper alignment.	Fixed and Rigidly Guided	I 	.50
	Pivoted and Rigidly Guided	II 	.70
	Supported but not Rigidly Guided	III 	2.00
Group 2 Style D — Trunnion on Head	Pivoted and Rigidly Guided	IV 	1.00
Style DD — Intermediate Trunnion	Pivoted and Rigidly Guided	V 	1.50
Style DB — Trunnion on Cap or Style BB — Clevis on Cap	Pivoted and Rigidly Guided	VI 	2.00


Piston Rod — Stroke Selection Chart

1 1/2" Through 8" Bore

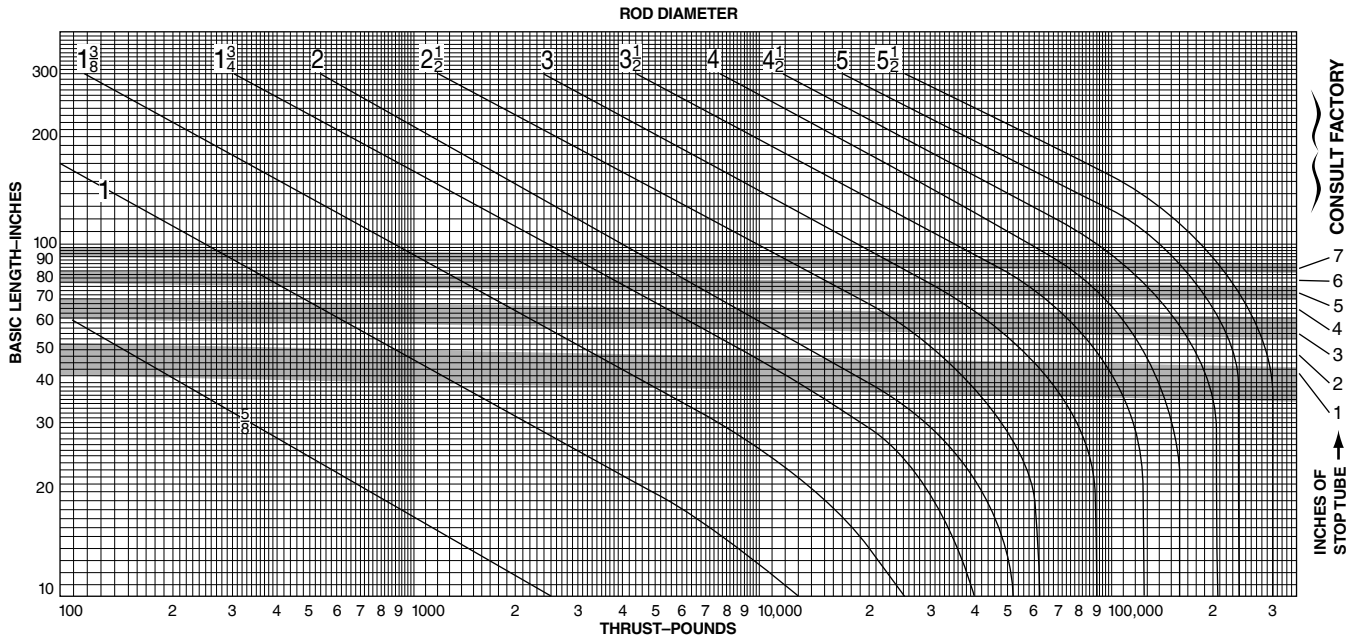

Piston Rod — Stroke Selection Chart

10" Through 14" Bore

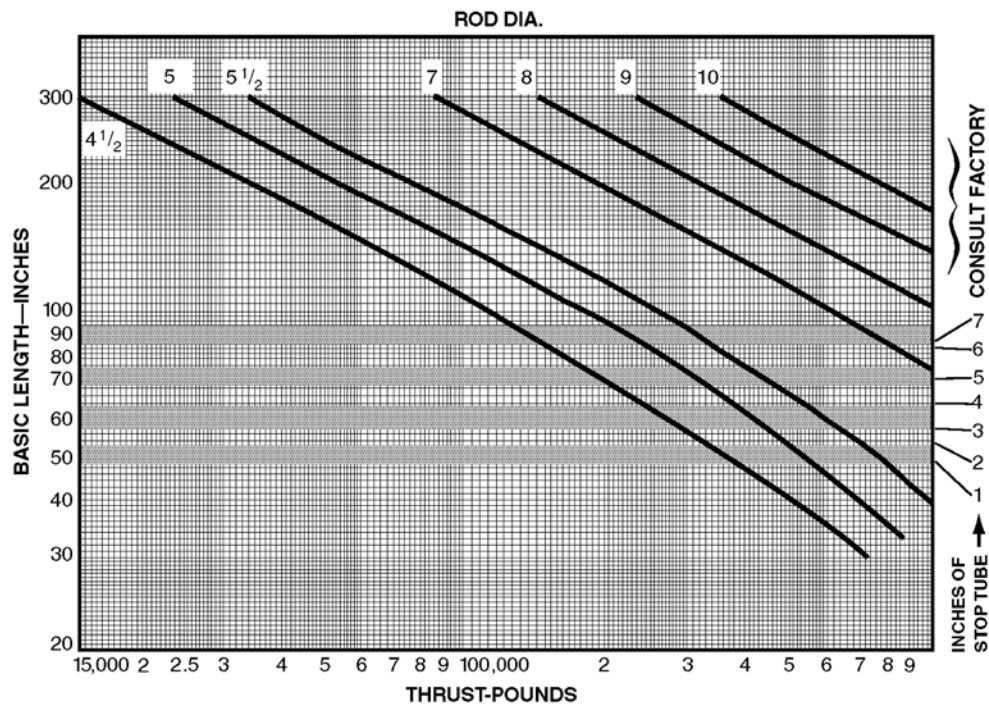

Selecting the Proper Size Cylinder

DETERMINE THE FORCE REQUIRED — To select a cylinder for an application, first determine the maximum push and/or pull force required to do the job. Then use the pressure table to select the cylinder that gives the necessary force for your application. It should be noted that the force requirements derived by formula are only theoretically correct. Other factors must be provided for.

Pressure drop—which means that working pressure at the cylinder port will be somewhat less than system

pressure—should be allowed for in such calculations. A margin for overcoming friction in the cylinder likewise must be added.

After selecting the proper size cylinder for the job use the envelope and mounting dimension charts to determine cylinder dimensions.

Pressure Table

CYL. BORE DIA.	PRESSURE RATINGS		PISTON ROD DIA.	CYL. WORK ACTION	WORK AREA (SQ. IN.)	HYDRAULIC WORKING PRESSURE PSI						FLUID REQUIRED PER IN. OF STROKE	
	HEAVY DUTY SERVICE	4:1 SAFETY FACTOR				350	500	750	1000	1500	2000	GAL.	CU. FT.
1.50	2000	1246	$\frac{5}{8}$ 1	Push	1.767	618	884	1325	1767	2651	3534	.00765	.00102
				Pull	1.460	511	730	1095	1460	2190	2920	.00632	.00084
				Pull	.982	344	491	737	982	1473	1964	.00425	.00057
2.00	2000	1000	1 $1\frac{3}{8}$	Push	3.141	1099	1571	2356	3141	4712	6282	.01360	.00182
				Pull	2.356	825	1178	1767	2356	3534	4712	.01020	.00136
				Pull	1.656	580	828	1252	1656	2484	3312	.00717	.00096
2.50	2000	1000	1 $1\frac{3}{8}$ $1\frac{3}{4}$	Push	4.909	1718	2455	3682	4909	7364	9818	.02125	.00284
				Pull	4.124	1443	2062	3093	4124	6186	8248	.01785	.00239
				Pull	3.424	1198	1712	2568	3424	5136	6848	.01482	.00198
3.25	2000	1912	$1\frac{3}{8}$ $1\frac{3}{4}$ 2	Push	8.296	2904	4148	6222	8296	12444	16592	.0359	.00480
				Pull	6.811	2384	3406	5108	6811	10217	13622	.0295	.00394
				Pull	5.891	2062	2946	4418	5891	8837	11782	.0255	.00341
4.00	2000	1490	$1\frac{3}{4}$ 2 $2\frac{1}{2}$	Push	12.566	4398	6283	9425	12566	18849	25132	.0544	.00727
				Pull	10.161	3556	5081	7621	10161	15242	20322	.0440	.00588
				Pull	9.424	3298	4712	7068	9424	14136	18848	.0408	.00545
5.00	2000	1348	2 $2\frac{1}{2}$ 3 $3\frac{1}{2}$	Push	19.635	6872	9818	14726	19635	29453	39270	.0850	.01136
				Pull	16.492	5772	8246	12369	16492	24738	32984	.0714	.00954
				Pull	14.726	5154	7363	11045	14726	22089	29452	.0637	.00852
6.00	2000	1099	$2\frac{1}{2}$ 3 $3\frac{1}{2}$ 4	Push	28.274	9896	14137	21206	28274	42411	56548	.1224	.01636
				Pull	23.365	8178	11683	17524	23365	35048	46730	.1011	.01352
				Pull	21.205	7422	10603	15904	21205	31808	42410	.0918	.01227
7.00	2000	1384	3 $3\frac{1}{2}$ 4 $4\frac{1}{2}$ 5	Push	38.485	13470	19243	28864	38485	57728	76970	.1666	.02227
				Pull	31.416	10996	15708	23562	31416	47124	62832	.1360	.01818
				Pull	28.864	10102	14432	21648	28864	43296	57728	.1250	.01670
8.00	2000	1121	4 $4\frac{1}{2}$ 5 $5\frac{1}{2}$	Push	50.265	17593	25133	37699	50265	75398	100530	.2176	.02909
				Pull	40.644	14225	20322	30483	40644	60966	81288	.1759	.02352
				Pull	37.699	13195	18850	28274	37699	56549	76970	.1632	.02182
10.00	2000	2000	5 $5\frac{1}{2}$ 7	Push	34.365	12028	17183	25774	34365	51548	68730	.1488	.01989
				Pull	30.630	10721	15315	22973	30630	45945	61260	.1326	.01772
				Pull	26.507	9277	13254	19880	26507	39761	53014	.1147	.01534
12.00	2000	1112	$4\frac{1}{2}$ 5 $5\frac{1}{2}$ 7	Push	78.540	27489	39270	58905	78540	117810	157080	.3400	.04545
				Pull	62.636	21923	31318	46977	62636	93954	125272	.2712	.03625
				Pull	58.905	20617	29453	44179	58905	88358	117810	.2549	.03408
14.00	2000	1221	7 8 $8\frac{1}{2}$	Push	54.782	19174	27391	41087	54782	82173	109564	.2372	.03170
				Pull	40.055	14019	20028	30041	40055	60083	80110	.1740	.02319
				Push	113.100	34585	56550	84825	113100	169650	226200	.4896	.06545
12.00	2000	1112	7 8 $8\frac{1}{2}$	Pull	89.399	31269	44670	67004	89339	134009	178678	.3868	.05170
				Pull	74.613	26115	37307	55960	74613	111920	149226	.3230	.04333
				Pull	62.830	21991	31415	47123	62830	94245	125660	.2719	.03636
14.00	2000	1221	7 8 10	Push	56.352	19723	28176	42264	56352	84528	112704	.2441	.03259
				Push	153.94	53879	76970	115455	153940	230910	307880	.6664	.0089
				Pull	115.45	40408	57725	86588	115450	173175	230900	.4998	.0668
14.00	2000	1221	7 8 10	Pull	103.67	36285	51835	77753	103670	155505	207340	.4488	.06
				Pull	75.40	26390	37700	56550	75400	113100	150800	.3264	.0436

4:1 SAFETY FACTOR BASED ON BURST PRESSURE ONLY

Recommended Head Screw Torque Values for Series “MH” Cylinders

BORE	1½	2	2½	3¼	4	5	6	7	8	10	12	14	16", 18", 20"
HEAD BOLT THREAD	¾ - 24	1½ - 20	1½ - 20	5/8 - 18	5/8 - 18	7/8 - 14	1-14	1½ - 12	1¼ - 12	1½ - 12	1¼ - 12	1¼ - 12	Consult Factory
TORQUE FT. LBS.	11	28	30	50	75	160	220	325	375	350	620	500	

Recommended Retainer Screw Torque Values for Series “MH” Cylinders

Screw Size	#10-24 UNC	1/4-20 UNC	3/8-16 UNC
Torque	24 in. lb.	120 in. lb.	240 in. lb.

**Approximate Net Weights of Series “MH” Cylinders Based on Standard Rod Diameters
(All weights expressed in lbs.)**

BORE	ROD DIA.	SINGLE ROD END		DOUBLE ROD END	
		BASE	PER INCH	DRE BASE	DRE PER INCH
1.50	0.63	11.5	0.4	13.2	0.5
	1	11.8	0.5	13.3	0.7
2.00	1	16.4	0.6	20.0	0.8
	1.38	20.3	0.8	23.8	1.2
2.50	1	23.2	0.9	28.2	1.1
	1.75	29.2	1.3	33.7	2.0
3.25	1.38	48.8	1.5	59.8	1.9
	2	53.8	1.9	64.8	2.8
4.00	1.75	64.9	2.2	74.9	2.9
	2	69.9	2.9	108.9	4.3
5.00	2	98.1	2.8	118.1	4.2
	3.5	102.1	4.6	139.1	7.3
6.00	2.5	156.2	4.4	182.2	5.8
	4	163.2	6.5	213.2	10.1
7.00	3	276.2	5.7	373.2	7.7
	5	287.2	9.3	394.2	14.9
8.00	3.5	325.0	7.8	380.0	10.5
	5.5	358.0	11.8	460.0	18.5

BORE	ROD DIA.	SINGLE ROD END					DOUBLE ROD END	
		D, DB BASE	DD, JJ, HH BASE	JB, HB BASE	BE, BB, E, C BASE	PER INCH OF STROKE	ADD TO ALL	ADD PER INCH
10.00	4.50	672.4	756.4	794.4	717.4	13.0	43	18.0
	5.00	684.4	766.4	805.4	729.4	14.0	50	19.0
	5.50	693.4	777.4	815.4	738.4	15.0	64	22.0
	7.00	730.4	814.4	852.4	775.4	19.0	101	30.0
12.00	5.50	1068.5	1201.5	1280.5	1144.5	19.5	64	26.5
	7.00	1105.5	1238.5	1317.5	1180.5	23.5	101	34.5
	8.00	1166.5	1299.5	1378.5	1241.5	26.5	162	40.5
14.00	7.00	1480.0	1665.0	1727.0	1630.0	24.3	101	35.3
	8.00	1541.0	1726.0	1788.0	1691.0	27.3	162	41.3
	10.00	1641.0	1826.0	1888.0	1791.0	35.3	262	57.3

Safety Guide for Selecting and Using Hydraulic, Pneumatic Cylinders and Their Accessories

WARNING: ⚠ **FAILURE OF THE CYLINDER, ITS PARTS, ITS MOUNTING, ITS CONNECTIONS TO OTHER OBJECTS, OR ITS CONTROLS CAN RESULT IN:**

- Unanticipated or uncontrolled movement of the cylinder or objects connected to it.
- Falling of the cylinder or objects held up by it.
- Fluid escaping from the cylinder, potentially at high velocity.

THESE EVENTS COULD CAUSE DEATH OR PERSONAL INJURY BY, FOR EXAMPLE, PERSONS FALLING FROM HIGH LOCATIONS, BEING CRUSHED OR STRUCK BY HEAVY OR FAST MOVING OBJECTS, BEING PUSHED INTO DANGEROUS EQUIPMENT OR SITUATIONS, OR SLIPPING ON ESCAPED FLUID.

Before selecting or using Parker (The Company) cylinders or related accessories, it is important that you read, understand and follow the following safety information. Training is advised before selecting and using The Company's products.

1.0 General Instructions

1.1 Scope – This safety guide provides instructions for selecting and using (including assembling, installing, and maintaining) cylinder products. This safety guide is a supplement to and is to be used with the specific Company publications for the specific cylinder products that are being considered for use.

1.2 Fail Safe – Cylinder products can and do fail without warning for many reasons. All systems and equipment should be designed in a fail-safe mode so that if the failure of a cylinder product occurs people and property won't be endangered.

1.3 Distribution – Provide a free copy of this safety guide to each person responsible for selecting or using cylinder products. Do not select or use The Company's cylinders without thoroughly reading and understanding this safety guide as well as the specific Company publications for the products considered or selected.

1.4 User Responsibility – Due to very wide variety of cylinder applications and cylinder operating conditions, The Company does not warrant that any particular cylinder is suitable for any specific application. This safety guide does not analyze all technical parameters that must be considered in selecting a product. The hydraulic and pneumatic cylinders outlined in this catalog are designed to The Company's design guidelines and do not necessarily meet the design guideline of other agencies such as American Bureau of Shipping, ASME Pressure Vessel Code etc. The user, through its own analysis and testing, is solely responsible for:

- Making the final selection of the cylinders and related accessories.
- Determining if the cylinders are required to meet specific design requirements as required by the Agency(s) or industry standards covering the design of the user's equipment.
- Assuring that the user's requirements are met, OSHA requirements are met, and safety guidelines from the applicable agencies such as but not limited to ANSI are followed and that the use presents no health or safety hazards.
- Providing all appropriate health and safety warnings on the equipment on which the cylinders are used.

1.5 Additional Questions – Call the appropriate Company technical service department if you have any questions or require any additional information. See the Company publication for the product being considered or used, or call 1-800-CPARKER, or go to www.parker.com, for telephone numbers of the appropriate technical service department.

2.0 Cylinder and Accessories Selection

2.1 Seals – Part of the process of selecting a cylinder is the selection of seal compounds. Before making this selection, consult the "seal information page(s)" of the publication for the series of cylinders of interest.

The application of cylinders may allow fluids such as cutting fluids, wash down fluids etc. to come in contact with the external area of the cylinder. These fluids may attack the piston rod wiper and or the primary seal and must be taken into account when selecting and specifying seal compounds.

Dynamic seals will wear. The rate of wear will depend on many operating factors. Wear can be rapid if a cylinder is mis-aligned or if the cylinder has been improperly serviced. The user must take seal wear into consideration in the application of cylinders.

2.2 Piston Rods – Possible consequences of piston rod failure or separation of the piston rod from the piston include, but are not limited to are:

- Piston rod and or attached load thrown off at high speed.
- High velocity fluid discharge.
- Piston rod extending when pressure is applied in the piston retract mode.

Piston rods or machine members attached to the piston rod may move suddenly and without warning as a consequence of other conditions occurring to the machine such as, but not limited to:

- Unexpected detachment of the machine member from the piston rod.

- Failure of the pressurized fluid delivery system (hoses, fittings, valves, pumps, compressors) which maintain cylinder position.
- Catastrophic cylinder seal failure leading to sudden loss of pressurized fluid.
- Failure of the machine control system.

Follow the recommendations of the "Piston Rod Selection Chart and Data" in the publication for the series of cylinders of interest. The suggested piston rod diameter in these charts must be followed in order to avoid piston rod buckling.

Piston rods are not normally designed to absorb bending moments or loads which are perpendicular to the axis of piston rod motion. These additional loads can cause the piston rod to fail. If these types of additional loads are expected to be imposed on the piston rod, their magnitude should be made known to our engineering department.

The cylinder user should always make sure that the piston rod is securely attached to the machine member.

On occasion cylinders are ordered with double rods (a piston rod extended from both ends of the cylinder). In some cases a stop is threaded on to one of the piston rods and used as an external stroke adjuster. On occasions spacers are attached to the machine member connected to the piston rod and also used as a stroke adjuster. In both cases the stops will create a pinch point and the user should consider appropriate use of guards. If these external stops are not perpendicular to the mating contact surface, or if debris is trapped between the contact surfaces, a bending moment will be placed on the piston rod, which can lead to piston rod failure. An external stop will also negate the effect of cushioning and will subject the piston rod to impact loading. Those two (2) conditions can cause piston rod failure. Internal stroke adjusters are available with and without cushions. The use of external stroke adjusters should be reviewed with our engineering department.

The piston rod to piston and the stud to piston rod threaded connections are secured with an anaerobic adhesive. The strength of the adhesive decreases with increasing temperature. Cylinders which can be exposed to temperatures above +250°F (+121°C) are to be ordered with a non studded piston rod and a pinned piston to rod joint.

2.3 Cushions – Cushions should be considered for cylinder applications when the piston velocity is expected to be over 4 inches/second.

Cylinder cushions are normally designed to absorb the energy of a linear applied load. A rotating mass has considerably more energy than the same mass moving in a linear mode. Cushioning for a rotating mass application should be review by our engineering department.

2.4 Cylinder Mountings – Some cylinder mounting configurations may have certain limitations such as but not limited to minimum stroke for side or foot mounting cylinders or pressure de-ratings for certain mounts. Carefully review the catalog for these types of restrictions.

Always mount cylinders using the largest possible high tensile alloy steel socket head cap screws that can fit in the cylinder mounting holes and torque them to the manufacturer's recommendations for their size.

2.5 Port Fittings – Hydraulic cylinders applied with meter out or deceleration circuits are subject to intensified pressure at piston rod end.

The rod end pressure is approximately equal to:

$$\frac{\text{operating pressure} \times \text{effective cap end area}}{\text{effective rod end piston area}}$$

Contact your connector supplier for the pressure rating of individual connectors.

3.0 Cylinder and Accessories Installation and Mounting

3.1 Installation

3.1.1 – Cleanliness is an important consideration, and cylinders are shipped with the ports plugged to protect them from contaminants entering the ports. These plugs should not be removed until the piping is to be installed. Before making the connection to the cylinder ports, piping should be thoroughly cleaned to remove all chips or burrs which might have resulted from threading or flaring operations.

3.1.2 – Cylinders operating in an environment where air drying materials are present such as fast-drying chemicals, paint, or weld splatter, or other hazardous conditions such as excessive heat, should have shields installed to prevent damage to the piston rod and piston rod seals.

3.1.3 – Proper alignment of the cylinder piston rod and its mating component on the machine should be checked in both the extended and retracted positions. Improper alignment will result in excessive rod gland and/or cylinder bore wear. On fixed mounting cylinders attaching the piston rod while the rod is retracted will help in achieving proper alignment.

3.1.4 – Sometimes it may be necessary to rotate the piston rod in order to thread the piston rod into the machine member. This operation must always be done with zero pressure being applied to either side of the piston. Failure to follow this procedure may result in loosening the piston to rod-threaded connection. In some rare cases the turning of the piston rod may rotate a threaded piston rod gland and loosen it from the cylinder head. Confirm that this condition is not occurring. If it does, re-tighten the piston rod gland firmly against the cylinder head.

For double rod cylinders it is also important that when attaching or detaching the piston rod from the machine member that the torque be applied to the piston rod end of the cylinder that is directly attaching to the machine member with the opposite end unrestrained. If the design of the machine is such that only the rod end of the cylinder opposite to where the rod attaches to the machine member can be rotated, consult the factory for further instructions.

3.2 Mounting Recommendations

3.2.1 – Always mount cylinders using the largest possible high tensile alloy steel socket head screws that can fit in the cylinder mounting holes and torque them to the manufacturer's recommendations for their size.

3.2.2 – Side-Mounted Cylinders – In addition to the mounting bolts, cylinders of this type should be equipped with thrust keys or dowel pins located so as to resist the major load.

3.2.3 – Tie Rod Mounting – Cylinders with tie rod mountings are recommended for applications where mounting space is limited. The standard tie rod extension is shown as BB in dimension tables. Longer or shorter extensions can be supplied. Nuts used for this mounting style should be torqued to the same value as the tie rods for that bore size.

3.2.4 – Flange Mount Cylinders – The controlled diameter of the rod gland extension on head end flange mount cylinders can be used as a pilot to locate the cylinders in relation to the machine. After alignment has been obtained, the flanges may be drilled for pins or dowels to prevent shifting.

3.2.5 – Trunnion Mountings – Cylinders require lubricated bearing blocks with minimum bearing clearances. Bearing blocks should be carefully aligned and rigidly mounted so the trunnions will not be subjected to bending moments. The rod end should also be pivoted with the pivot pin in line and parallel to axis of the trunnion pins.

3.2.6 – Clevis Mountings – Cylinders should be pivoted at both ends with centerline of pins parallel to each other. After cylinder is mounted, be sure to check to assure that the cylinder is free to swing through its working arc without interference from other machine parts.

4.0 Cylinder and Accessories Maintenance, Troubleshooting and Replacement

4.1 Storage – At times cylinders are delivered before a customer is ready to install them and must be stored for a period of time. When storage is required the following procedures are recommended.

4.1.1 – Store the cylinders in an indoor area which has a dry, clean and noncorrosive atmosphere. Take care to protect the cylinder from both internal corrosion and external damage.

4.1.2 – Whenever possible cylinders should be stored in a vertical position (piston rod up). This will minimize corrosion due to possible condensation which could occur inside the cylinder. This will also minimize seal damage.

4.1.3 – Port protector plugs should be left in the cylinder until the time of installation.

4.1.4 – If a cylinder is stored full of hydraulic fluid, expansion of the fluid due to temperature changes must be considered. Installing a check valve with free flow out of the cylinder is one method.

4.1.5 – When cylinders are mounted on equipment that is stored outside for extended periods, exposed unpainted surfaces, e.g. piston rod, must be coated with a rust-inhibiting compound to prevent corrosion.

4.2 Cylinder Trouble Shooting

4.2.1 – External Leakage

4.2.1.1 – Rod seal leakage can generally be traced to worn or damaged seals. Examine the piston rod for dents, gouges or score marks, and replace piston rod if surface is rough.

Rod seal leakage could also be traced to gland wear. If clearance is excessive, replace rod bushing and seal. Rod seal leakage can also be traced to seal deterioration. If seals are soft or gummy or brittle, check compatibility of seal material with lubricant used if air cylinder, or operating fluid if hydraulic cylinder. Replace with seal material, which is compatible with these fluids. If the seals are hard or have lost elasticity, it is usually due to exposure to temperatures in excess of 165°F. (+74°C). Shield the cylinder from the heat source to limit temperature to 350°F. (+177°C.) and replace with fluorocarbon seals.

4.2.1.2 – Cylinder body seal leak can generally be traced to loose tie rods. Torque the tie rods to manufacturer's recommendation for that bore size.

Excessive pressure can also result in cylinder body seal leak. Determine maximum pressure to rated limits. Replace seals and retorqued tie rods as in paragraph above. Excessive pressure can also result in cylinder body seal leak. Determine if the pressure rating of the cylinder has been exceeded. If so, bring the operating pressure down to the rating of the cylinder and have the tie rods replaced.

Pinched or extruded cylinder body seal will also result in a leak. Replace cylinder body seal and retorqued as in paragraph above.

Cylinder body seal leakage due to loss of radial squeeze which shows up in the form of flat spots or due to wear on the O.D. or I.D. – Either of these are symptoms of normal wear due to high cycle rate or length of service. Replace seals as per paragraph above.

4.2.2 – Internal Leakage

4.2.2.1 – Piston seal leak (by-pass) 1 to 3 cubic inches per minute leakage is considered normal for piston ring construction. Virtually no static leak with lipseal type seals on piston should be expected. Piston seal wear is a usual cause of piston seal leakage. Replace seals as required.

4.2.2.2 – With lipseal type piston seals excessive back pressure due to over-adjustment of speed control valves could be a direct cause of rapid seal wear. Contamination in a hydraulic system can result in a scored cylinder bore, resulting in rapid seal wear. In either case, replace piston seals as required.

4.2.2.3 – What appears to be piston seal leak, evidenced by the fact that the cylinder drifts, is not always traceable to the piston. To make sure, it is suggested that one side of the cylinder piston be pressurized and the fluid line at the opposite port be disconnected. Observe leakage. If none is evident, seek the cause of cylinder drift in other component parts in the circuit.

4.2.3 – Cylinder Fails to Move the Load

4.2.3.1 – Pneumatic or hydraulic pressure is too low. Check the pressure at the cylinder to make sure it is to circuit requirements.

4.2.3.2 – Piston Seal Leak – Operate the valve to cycle the cylinder and observe fluid flow at valve exhaust ports at end of cylinder stroke. Replace piston seals if flow is excessive.

4.2.3.3 – Cylinder is undersized for the load – Replace cylinder with one of a larger bore size.

4.3 Erratic or Chatter Operation


4.3.1 – Excessive friction at rod gland or piston bearing due to load misalignment – Correct cylinder-to-load alignment.

4.3.2 – Cylinder sized too close to load requirements – Reduce load or install larger cylinder.

4.3.3 – Erratic operation could be traced to the difference between static and kinetic friction. Install speed control valves to provide a back pressure to control the stroke.


4.4 Cylinder Modifications, Repairs, or Failed Component – Cylinders as shipped from the factory are not to be disassembled and or modified. If cylinders require modifications, these modifications must be done at company locations or by The Company's certified facilities. The Cylinder Division Engineering Department must be notified in the event of a mechanical fracture or permanent deformation of any cylinder component (excluding seals). This includes a broken piston rod, tie rod, mounting accessory or any other cylinder component. The notification should include all operation and application details. This information will be used to provide an engineered repair that will prevent recurrence of the failure.

It is allowed to disassemble cylinders for the purpose of replacing seals or seal assemblies. However, this work must be done by strictly following all the instructions provided with the seal kits.

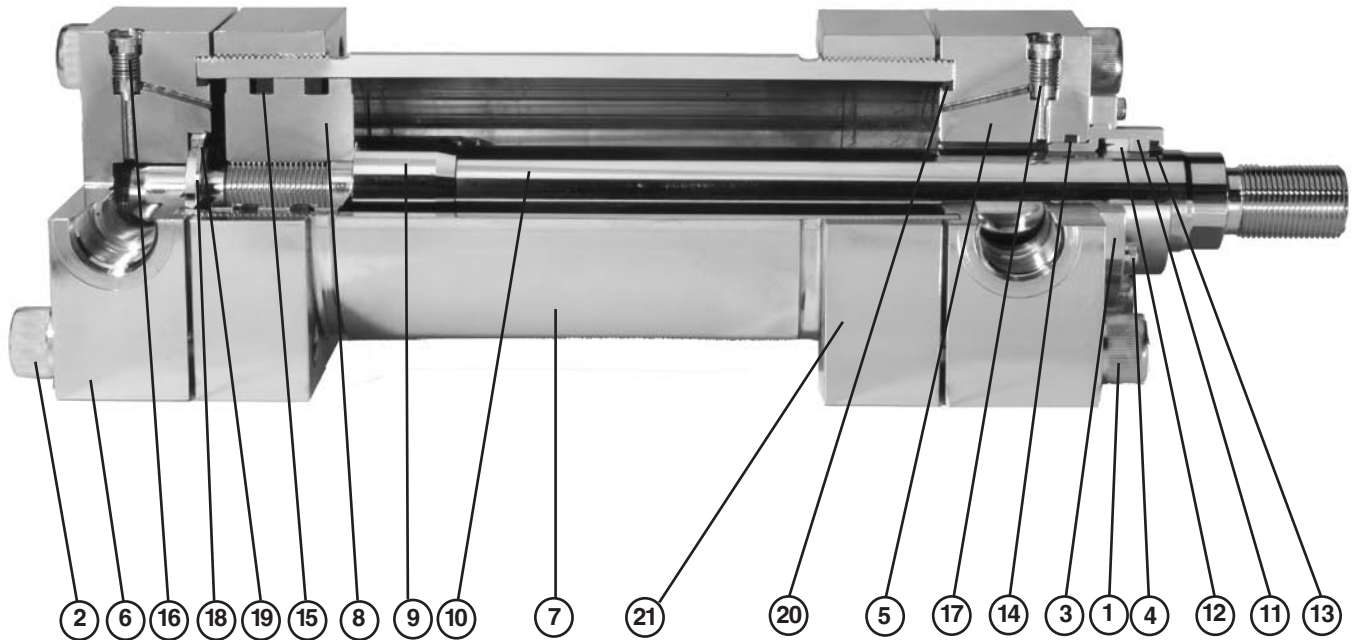

- 01. Rod Head Screw
- 02. Cap Head Screw
- 03. Retainer
- 04. Retainer Screw
- 05. Rod Head
- 06. Cap Head
- 07. Cylinder Body
- 08. Piston
- 09. Rod End Cushion Sleeve
- 10. Piston Rod
- 11. Rod Gland
- 12. Rod Seal
- 13. Rod Wiper
- 14. Gland O.D. Seal

- 15. Piston O.D. Seal
- 16. Needle Valve Assembly
- 17. Ball Check Assembly
- 18. Cushion Bushing
- 19. Retaining Ring
- 20. Cylinder Body Seal
- 21. Cylinder Body Flange

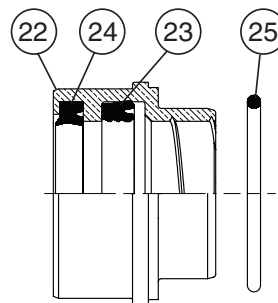

Cylinder Repair Kit Contents

Items 11, 12, 13, 14, 15, 20

To speed the handling of orders for parts or Repair kits, please specify:

- 1. Cylinder serial number
- 2. Cylinder bore diameter
- 3. Stroke
- 4. Piston rod diameter
- 5. Operating medium

- 22. Rod Gland
- 23. Rod Seal
- 24. Rod Wiper
- 25. Gland O.D. Seal

Offer of Sale

The items described in this document and other documents or descriptions provided by Parker Hannifin Corporation, its subsidiaries and Divisions ("Company") and its authorized distributors, are hereby offered for sale at prices to be established by the Company, its subsidiaries and its authorized distributors. This offer and its acceptance by any customer ("Buyer") shall be governed by all of the following Terms and Conditions. Buyer's order for any such item, when communicated to the Company, its subsidiary or an authorized distributor ("Seller") verbally or in writing, shall constitute acceptance of this offer.

1. Terms and Conditions of Sale: All descriptions, quotations, proposals, offers, acknowledgments, acceptances and sales of Seller's products are subject to and shall be governed exclusively by the terms and conditions stated herein. Buyer's acceptance of any offer to sell is limited to these terms and conditions. Any terms or conditions in addition to, or inconsistent with those stated herein, proposed by Buyer in any acceptance of an offer by Seller, are hereby objected to. No such additional, different or inconsistent terms and conditions shall become part of the contract between Buyer and Seller unless expressly accepted in writing by Seller. Seller's acceptance of any offer to purchase by Buyer is expressly conditional upon Buyer's assent to all the terms and conditions stated herein, including any terms in addition to, or inconsistent with those contained in Buyer's offer. Acceptance of Seller's products shall in all events constitute such assent.

2. Payment: Payment shall be made by Buyer net 30 days from the date of delivery of the items purchased hereunder. Amounts not timely paid shall bear interest at the maximum rate permitted by law for each month or portion thereof that the Buyer is late in making payment. Any claims by Buyer for omissions or shortages in a shipment shall be waived unless Seller receives notice thereof within 30 days after Buyer's receipt of the shipment.

3. Delivery: Unless otherwise provided on the face hereof, delivery shall be made F.O.B. Seller's plant. Regardless of the method of delivery, however, risk of loss shall pass to Buyer upon Seller's delivery to a carrier. Any delivery dates shown are approximate only and Seller shall have no liability for any delays in delivery.

4. Warranty: Seller warrants that the items sold hereunder shall be free from defects in material or workmanship for a period of 18 months from date of shipment from the Company. **THIS WARRANTY COMPRISES THE SOLE AND ENTIRE WARRANTY PERTAINING TO ITEMS PROVIDED HEREUNDER. SELLER MAKES NO OTHER WARRANTY, GUARANTEE, OR REPRESENTATION OF ANY KIND WHATSOEVER. ALL OTHER WARRANTIES, INCLUDING BUT NOT LIMITED TO, MERCHANTABILITY AND FITNESS FOR PURPOSE, WHETHER EXPRESS, IMPLIED, OR ARISING BY OPERATION OF LAW, TRADE USAGE, OR COURSE OF DEALING ARE HEREBY DISCLAIMED.**

NOTWITHSTANDING THE FOREGOING, THERE ARE NO WARRANTIES WHATSOEVER ON ITEMS BUILT OR ACQUIRED WHOLLY OR PARTIALLY, TO BUYER'S DESIGN OR SPECIFICATIONS.

5. Limitation of Remedy: SELLER'S LIABILITY ARISING FROM OR IN ANY WAY CONNECTED WITH THE ITEMS SOLD OR THIS CONTRACT SHALL BE LIMITED EXCLUSIVELY TO REPAIR OR REPLACEMENT OF THE ITEMS SOLD OR REFUND OF THE PURCHASE PRICE PAID BY BUYER, AT SELLER'S SOLE OPTION. IN NO EVENT SHALL SELLER BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES OF ANY KIND OR NATURE WHATSOEVER, INCLUDING BUT NOT LIMITED TO LOST PROFITS ARISING FROM OR IN ANY WAY CONNECTED WITH THIS AGREEMENT OR ITEMS SOLD HEREUNDER, WHETHER ALLEGED TO ARISE FROM BREACH OF CONTRACT, EXPRESS OR IMPLIED WARRANTY, OR IN TORT, INCLUDING WITHOUT LIMITATION, NEGLIGENCE, FAILURE TO WARN OR STRICT LIABILITY.

6. Changes, Reschedules and Cancellations: Buyer may request to modify the designs or specifications for the items sold hereunder as well as the quantities and delivery dates thereof, or may request to cancel all or part of this order, however, no such requested modification or cancellation shall become part of the contract between Buyer and Seller unless accepted by Seller in a written amendment to this Agreement. Acceptance of any such requested modification or cancellation shall be at Seller's discretion, and shall be upon such terms and conditions as Seller may require.

7. Special Tooling: A tooling charge may be imposed for any special tooling, including without limitations, dies, fixtures, molds and patterns, acquired to manufacture items sold pursuant to this contract. Such special tooling shall be and remain Seller's property notwithstanding payment of any charges by Buyer. In no event will Buyer acquire any interest in apparatus belonging to Seller which is utilized in the manufacture of the items sold hereunder, even if such apparatus has been specially converted or adapted for such manufacture and notwithstanding any charges paid by Buyer. Unless otherwise agreed, Seller shall have the right to alter, discard or otherwise dispose of any special tooling or other property in its sole discretion at any time.

8. Buyer's Property: Any designs, tools, patterns, materials, drawings, confidential information or equipment furnished by Buyer, or any other items which become Buyer's property, may be considered obsolete and may be destroyed by Seller after two (2) consecutive years have elapsed without Buyer placing an order for the items which are manufactured using such property. Seller shall not be responsible for any loss or damage to such property while it is in Seller's possession or control.

9. Taxes: Unless otherwise indicated on the face hereof, all prices and charges are exclusive of excise, sales, use, property, occupational or like taxes which may be imposed by any taxing authority upon the manufacture, sale or delivery of the items sold hereunder. If any such taxes must be paid by Seller or if Seller is liable for the collection of such tax, the amount thereof shall be in addition to the amounts for the items sold. Buyer agrees to pay all such taxes or to reimburse Seller therefore upon receipt of its invoice. If Buyer claims exemption from any sales, use or other tax imposed by any taxing authority, Buyer shall save Seller harmless from and against any such tax, together with any interest or penalties thereon which may be assessed if the items are held to be taxable.

10. Indemnity For Infringement of Intellectual Property Rights: Seller shall have no liability for infringement of any patents, trademarks, copyrights, trade dress, trade secrets or similar rights except as provided in this Part 10. Seller will defend and indemnify Buyer against allegations of infringement of U.S. patents, U.S. trademarks, copyrights, trade dress and trade secrets (hereinafter "Intellectual Property Rights"). Seller will defend at its expense and will pay the cost of any settlement or damages awarded in an action brought against Buyer based on an allegation that an item sold pursuant to this contract infringes the Intellectual Property Rights of a third party. Seller's obligation to defend and indemnify Buyer is contingent on Buyer notifying Seller within ten (10) days after Buyer becomes aware of such allegations of infringement, and Seller having sole control over the defense of any allegations or actions including all negotiations for settlement or compromise. If an item sold hereunder is subject to a claim that it infringes the Intellectual Property Rights of a third party, Seller may, at its sole expense and option, procure for Buyer the right to continue using said item, replace or modify said item so as to make it noninfringing, or offer to accept return of said item and return the purchase price less a reasonable allowance for depreciation. Notwithstanding the foregoing, Seller shall have no liability for claims of infringement based on information provided by Buyer, or directed to items delivered hereunder for which the designs are specified in whole or part by Buyer, or infringements resulting from the modification, combination or use in a system of any item sold hereunder. The foregoing provisions of this Part 10 shall constitute Seller's sole and exclusive liability and Buyer's sole and exclusive remedy for infringement of Intellectual Property Rights.

If a claim is based on information provided by Buyer or if the design for an item delivered hereunder is specified in whole or in part by Buyer, Buyer shall defend and indemnify Seller for all costs, expenses or judgments resulting from any claim that such item infringes any patent, trademark, copyright, trade dress, trade secret or any similar right.

11. Force Majeure: Seller does not assume the risk of and shall not be liable for delay or failure to perform any of Seller's obligations by reason of circumstances beyond the reasonable control of Seller (hereinafter "Events of Force Majeure"). Events of Force Majeure shall include without limitation, accidents, acts of God, strikes or labor disputes, acts, laws, rules or regulations of any government or government agency, fires, floods, delays or failures in delivery of carriers or suppliers, shortages of materials and any other cause beyond Seller's control.

12. Entire Agreement/Governing Law: The terms and conditions set forth herein, together with any amendments, modifications and any different terms or conditions expressly accepted by Seller in writing, shall constitute the entire Agreement concerning the items sold, and there are no oral or other representations or agreements which pertain thereto. This Agreement shall be governed in all respects by the law of the State of Ohio. No actions arising out of sale of the items sold hereunder or this Agreement may be brought by either party more than two (2) years after the cause of action accrues.





Parker Hannifin Corporation
Cylinder Division
500 South Wolf Road
Des Plaines, IL 60016 USA
phone (847) 298-2400
fax (800) 892-1008
www.parker.com/cylinder

Parker Hannifin Corporation
Motion and Control Division
160 Chisholm Drive
Milton, ON Canada L9T 3G9
direct (905) 693-3000
fax (905) 876-1958
www.parker.com

Catalog HY08-1117-1/NA
05/08