

OIL-Xplus Stainless Steel Compressed Air Filters



Compressed air systems are often located where the environment and prevailing atmospheric conditions are particularly corrosive. These applications include chemical and petro-chemical installations, offshore drilling platforms and ships, marine and process industries where problems concerning corrosion are increased.

All of the costly problems associated with compressed air contamination can be avoided by installing Parker domnick hunter OIL-Xplus high efficiency compressed air filters.

The OIL-Xplus stainless steel range is particularly ideal for those applications where an aggressive environment is an additional concern.

For 45 years Parker domnick hunter filters have been meeting the needs of the compressed air user by providing the highest quality, clean air to international standards whilst maintaining the lowest running costs.



Contact Information:

Parker Hannifin Manufacturing Limited
domnick hunter Filtration and Separation Division
Dukesway, Team Valley Trading Estate
Gateshead, Tyne and Wear
England NE11 0PZ

Tel: +44 (0)191 402 9000

Fax: +44 (0)191 482 6296

Email: indsales@parker.com

www.parker.com/dhfn

Benefits:

- Delivered air quality in accordance with all editions of ISO8573-1, the international standard for compressed air quality
- Suitable for all compressed air applications and all compressor types
- Low lifetime costs
- Coalescing and dust removal filters are covered by one year compressed air quality guarantee which is automatically renewed with annual maintenance
- All OIL-Xplus filter housings are covered by a 10 year housing guarantee
- Helps reduce the release of CO₂ into the environment

OIL-Xplus

High Performance Compressed Air Filtration

Oil Aerosol and Particulate Removal


Typical compressed air filters 'soak up' oil and water and are said to run in a 'wetted out' or saturated state. This temporarily blocks the path of compressed air through the normally open filter structure, and increases the operating pressure drop as the air flow has to force liquids through the fine matrix of the filtration media. This leads to significantly higher energy consumption.

Unlike typical filters, OIL-Xplus filter media does not soak up liquids, ensuring the available open area is kept to a maximum for dirt entrapment. Liquid aerosols coalesce within the anti re-entrainment barrier and fall into the filter bowl to be discharged via the drain.

Solid particulate is captured and held within the open area of the filter media, gradually increasing the differential pressure of the filter to a point where it is more economical to replace the element.

Oil Vapour Removal

Activated carbon with its high affinity for oil vapour is employed in OIL-Xplus grade ACS filters to remove gaseous contaminants such as oil vapours.

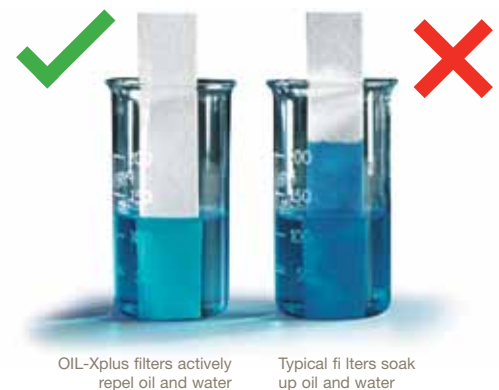

OIL-Xplus stainless steel filter housings



Flexible installation
9 different port sizes (1/4" - 3")

Suitable for aggressive environments
Manufactured from 316L Stainless Steel

Safe
Rated to 16 bar g (232 psi g)

Manual ball valve as standard
(External float drain option available)

OIL-Xplus high efficiency filter elements



Air tight positive 'O' ring seal
Prevents contamination by-pass

Support media
For added strength and integral pre-filtration

96% Voids volume
Gives high dirt holding capacity and provides 12 months life with lowest available energy costs

Stainless steel inner and outer support cylinders
Provides maximum strength

Anti re-entrainment barrier
Prevents oil / water carryover and is compatible with a wide range of lubricants

Chemical resistant
Tough corrosion resistant end caps withstand the worst compressed air conditions

Technical Data

Max Pressure	16 bar g (232 psi g)	Filter Type	Initial 'dry' differential pressure	Filter Type	Initial 'wet' differential pressure
Max Temp Grade AO, AA, AR	66°C (150°F)	Grade AO/AR	70 mbar (1,0 psi)	Grade AO	140 mbar (2,0 psi)
Max Temp Grade ACS	30°C (86°F)	Grade AA	100 mbar (1,5 psi)	Grade AA	200 mbar (3,0 psi)
Min Temp	1.5°C (35°F)	Grade ACS	70 mbar (1,0 psi)	Grade ACS / AR	N/A

Filtration Grades

GRADE AO High Efficiency General Purpose Protection	Particle removal down to : 1 micron, including water and oil aerosols. Maximum remaining oil aerosol content: 0.6 mg/m ³ at 21°C / 0.5 ppm(w) at 70°F
GRADE AA High Efficiency Oil Removal Filtration	(Precede with Grade AO filter) Particle removal down to: 0.01 micron, including water and oil aerosols. Maximum remaining oil aerosol content: 0.01 mg/m ³ at 21°C / 0.01 ppm(w) at 70°F
GRADE ACS Oil Vapour & Odour Removal	(Precede Grade ACS with Grade AA filter) Maximum remaining oil vapour content: 0.003 mg/m ³ at 21°C / 0.003 ppm(w) at 70°F
GRADE AR General Purpose Dust Filtration	Dry Particle removal down to : 1 micron

Stated flows are for operation at 7 bar g (100 psi g) with reference to 20°C, 1 bar a, 0% relative water vapour pressure. For flows at other pressures apply the correction factors shown.

To correctly select a filter model, the flow rate of the filter must be adjusted for the minimum operating pressure of the system

1. Obtain the minimum operating pressure and maximum compressed air flow rate at the inlet of the filter.
2. Select the correction factor for minimum operating pressure from the CFP table (always round down e.g. for 5.3 bar, use 5 bar correction factor)
3. Calculate the minimum filtration capacity
Minimum Filtration Capacity = Compressed Air Flow Rate x CFP
4. Using the minimum filtration capacity, select a filter model from the flow rate tables above (filter selected must have a flow rate equal to or greater than the minimum filtration capacity)

Product Selection

Filter Type	Port Size	L/s	m ³ /min	m ³ /h	cfm	Replacement Element Kit	No.
(grade) 0009GSS	G 1/4	9	0.53	32	19	K009 (grade)	1
(grade) 0017GSS	G 3/8	17	1.02	61	36	K017 (grade)	1
(grade) 0030GSS	G 1/2	30	1.80	108	64	K030 (grade)	1
(grade) 0058GSS	G 3/4	60	3.60	216	127	K058 (grade)	1
(grade) 0080GSS	G 1	80	4.80	288	170	K145 (grade)	1
(grade) 0145GSS	G 1 1/2	145	8.70	522	307	K145 (grade)	1
(grade) 0220GSS	G 2	220	13	792	466	K220 (grade)	1
(grade) 0330GSS	G 2	330	20	1.188	699	K330 (grade)	1
(grade) 0405GSS	G 2 1/2	400	24	1.440	848	K430 (grade)	1
(grade) 0430GSS	G 3	430	26	1.548	911	K430 (grade)	1


Correction Factors

Line Pressure	bar g	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
	psi.g	15	29	44	58	73	87	100	116	131	145	160	174	189	203	218	232
Correction Factor (CFP)		2.65	1.87	1.53	1.32	1.18	1.08	1.00	0.94	0.88	0.84	0.80	0.76	0.73	0.71	0.68	0.66

Weights and Dimensions

Filter Type	Height (H)		Width (B)		Depth (T)		Weight	
	mm	ins	mm	ins	mm	ins	Kg	lbs
(grade) 0009GSS	210	8.3	145	5.7	112	4.4	2.5	5.5
(grade) 0017GSS	236	9.3	145	5.7	112	4.4	2.5	5.5
(grade) 0030GSS	270	10.6	154	6.1	112	4.4	2.5	5.5
(grade) 0058GSS	382	15.0	190	7.5	148	5.8	4.5	9.9
(grade) 0080GSS	506	19.9	200	7.9	148	5.8	5.0	11.0
(grade) 0145GSS	506	19.9	225	8.9	148	5.8	5.0	11.0
(grade) 0220GSS	628	24.7	280	11.0	210	8.3	10.0	26.4
(grade) 0330GSS	938	36.9	280	11.0	210	8.3	12.0	26.4
(grade) 0405GSS	698	27.5	290	11.4	210	8.3	12.0	26.4
(grade) 0430GSS	698	27.5	300	1.8	210	8.3	12.0	26.4

Housing constructed from Stainless Steel : Grade 316L

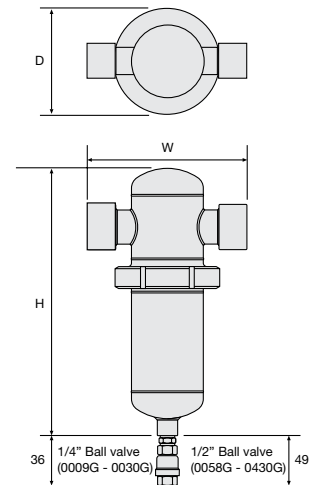

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates,
Dubai

Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, Wiener Neustadt

Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener
Neustadt

Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AZ – Azerbaijan, Baku

Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles

Tel: +32 (0)67 280 900
parker.belgium@parker.com

BG – Bulgaria, Sofia

Tel: +359 2 980 1344
parker.bulgaria@parker.com

BY – Belarus, Minsk

Tel: +48 (0)22 573 24 00
parker.poland@parker.com

CH – Switzerland, Etoy

Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany

Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst

Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup

Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid

Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa

Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve

Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens

Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budaörs

Tel: +36 23 885 470
parker.hungary@parker.com

IE – Ireland, Dublin

Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IT – Italy, Corsico (MI)

Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty

Tel: +7 7273 561 000
parker.easteurope@parker.com

NL – The Netherlands, Oldenzaal

Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Asker

Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw

Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira

Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest

Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow

Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga

Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica

Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto

Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul

Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev

Tel: +48 (0)22 573 24 00
parker.poland@parker.com

UK – United Kingdom, Warwick

Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park

Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario

Tel: +1 905 693 3000

US – USA, Cleveland

Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill

Tel: +61 (0)2-9634 7777

CN – China, Shanghai

Tel: +86 21 2899 5000

HK – Hong Kong

Tel: +852 2428 8008

IN – India, Mumbai

Tel: +91 22 6513 7081-85

JP – Japan, Tokyo

Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul

Tel: +82 2 559 0400

MY – Malaysia, Shah Alam

Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington

Tel: +64 9 574 1744

SG – Singapore

Tel: +65 6887 6300

TH – Thailand, Bangkok

Tel: +662 186 7000

TW – Taiwan, Taipei

Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires

Tel: +54 3327 44 4129

BR – Brazil, Sao Jose dos Campos

Tel: +55 800 727 5374

CL – Chile, Santiago

Tel: +56 2 623 1216

MX – Mexico, Toluca

Tel: +52 72 2275 4200

European Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI,
FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU,
SE, SK, UK, ZA)