

The range of Stainless Steel FRLs are ideal for use in the food industry, the petrochemical or process industries or any application in a particularly harsh or aggressive environment.

- Stainless steel construction handles most corrosive environments
- Fluorocarbon seals standard
- Meets NACE specifications MR-01-75/ISO 15156
- 1/8" female threaded drain



Stainless Steel  
Air Preparation Products

Filters

Regulators


Filter  
Regulators

Lubricators

**Operating information**

		PF504	PF10	PF501	PF11
Operating pressure:	Twist drain	0 to 300 PSIG (0 to 20.7 bar)	0 to 300 PSIG (0 to 20.7 bar)	0 to 300 PSIG (0 to 20.7 bar)	0 to 300 PSIG (0 to 20.7 bar)
	Auto drain	10 to 175 PSIG (0 to 12 bar)	10 to 175 PSIG (0 to 12 bar)	10 to 175 PSIG (0 to 12 bar)	10 to 175 PSIG (0 to 12 bar)
Operating temperature:	Twist drain	0°F to 180°F (-18°C to 82°C)	0°F to 180°F (-18°C to 82°C)	0°F to 180°F (-18°C to 82°C)	0°F to 180°F (-18°C to 82°C)
	Auto drain	32°F to 150°F (0°C to 66°C)	32°F to 150°F (0°C to 66°C)	32°F to 150°F (0°C to 66°C)	32°F to 150°F (0°C to 66°C)
Flow / SCFM (dm <sup>3</sup> /s):		23 (10.85)	70 (33.04)	16 (7.55)	45 (21.24)
For technical information see CD					

**Particulate Filters**



Port Size	Flow SCFM (dm <sup>3</sup> /s)	Standard filtration	Part number manual drain	Part number auto drain
1/4	23 (10.85)	20 μ	<b>PF504-02DHSS</b>	<b>PF504-02DHRSS</b>
1/2	70 (33.04)	40 μ	<b>PF10-04WJSS</b>	<b>PF10-04WJRSS</b>

**Coalescing Filters**



Port Size	Flow SCFM (dm <sup>3</sup> /s)	Standard filtration	Part number manual drain	Part number auto drain
1/4	16 (7.55)	.3 μ	<b>PF501-02DHSS</b>	<b>PF501-02DHRSS</b>
1/2	45 (21.24)	.01 μ	<b>PF11-04WJSS</b>	<b>PF11-04WJRSS</b>

**Service kits**


Description		PF504	PF10	PF501	PF11
Drain kit -	automatic pulse	<b>RK504SY-SS</b>		<b>RK504SY-SS</b>	
	automatic float		<b>SA10MDSS</b>		<b>SA10MDSS</b>
	manual twist, small (old)	<b>SA600Y7-1SS</b>	<b>SA600Y7-1SS</b>	<b>SA600Y7-1SS</b>	
	manual twist, large (new)	<b>SAP05481</b>	<b>SAP05481</b>	<b>SAP05481</b>	
Filter element -	5 micron (particulate)	<b>EK504VY</b>	<b>EK55J</b>		
	20 micron (particulate)	<b>EK504Y</b>			
	40 micron (particulate)		<b>EK55G</b>		
	0.3 micron (coalescing)			<b>EK501H</b>	
	0.01 micron (coalescing)				<b>EKF71</b>
Pipe nipple	<b>616Y28-SS</b>	<b>616A28-SS</b>	<b>616Y28-SS</b>	<b>616A28-SS</b>	

Most popular.




**P**  
**Stainless Steel**  
**Air Preparation Products**  
**Filters**  
**Regulators**  
**Filter Regulators**  
**Lubricators**

**PF504 / PF501**

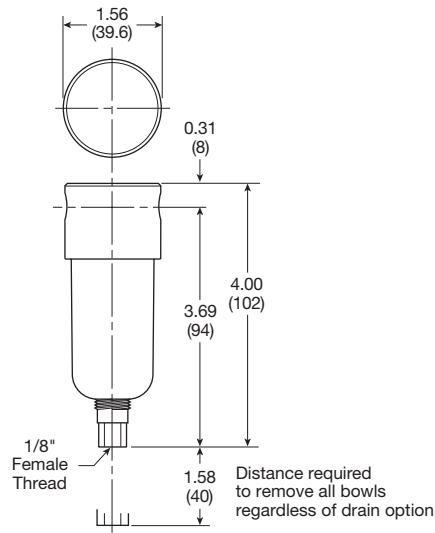

**PF10 / PF11**

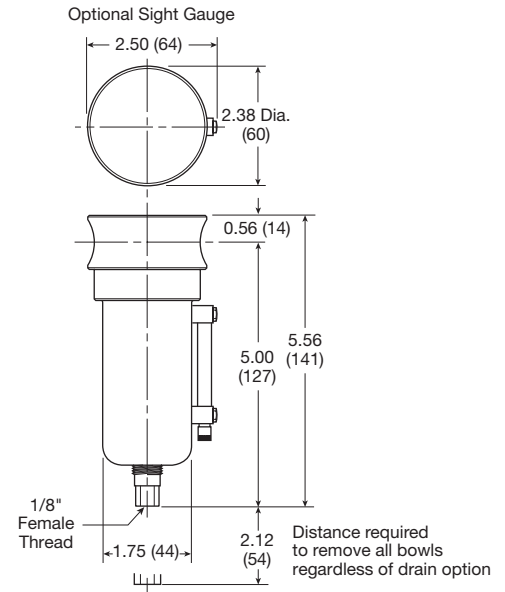

**Specifications**

Description	PF504	PF10	PF501	PF11
Filter rating	20 micron	40 micron	0.3 micron	0.01 micron
Port threads	1/4	1/2	1/4	1/2
Weight	0.6 lb. (0.27 kg)	1.9 lb. (0.85 kg)	0.6 lb. (0.27 kg)	1.9 lb. (0.85 kg)

**Material specifications**

Description	PF504	PF10	PF501	PF11
Body	316 stainless steel	316 stainless steel	316 stainless steel	316 stainless steel
Bowls	316 stainless steel	316 stainless steel	316 stainless steel	316 stainless steel
Deflector	Acetal	Acetal		
Drain	316 stainless steel	316 stainless steel	316 stainless steel	316 stainless steel
Element holder	Acetal	Acetal	Acetal	Acetal
Filter element	Polyethylene	Polyethylene	Borosilicate fiber	Borosilicate fiber
Seals	Fluorocarbon	Fluorocarbon	Fluorocarbon	Fluorocarbon
Sight gauge		Isoplast		Isoplast