

Prestolok PLM

Push-to-Connect Fittings

Product Features:

- Excellent resistance to high pressure and vacuum
- Chemical, corrosion and abrasion resistance
- Reduce assembly time by 30 seconds versus compression style fittings
- Silicone Free

Specifications:

Pressure Range: 7 to 290 psi

Temperature Range: -4° to +250°F

Compatible Tubing:

Polyethylene

Polyurethane 95 Durometer Shore A

FEP



Nylon

Applications:

- Wash down
- Harsh detergents
- Hot/Cold water cleaning
- Steam
- Robotic welding

Markets:

- Food Processing
- Industrial
- Chemical
- Life Science

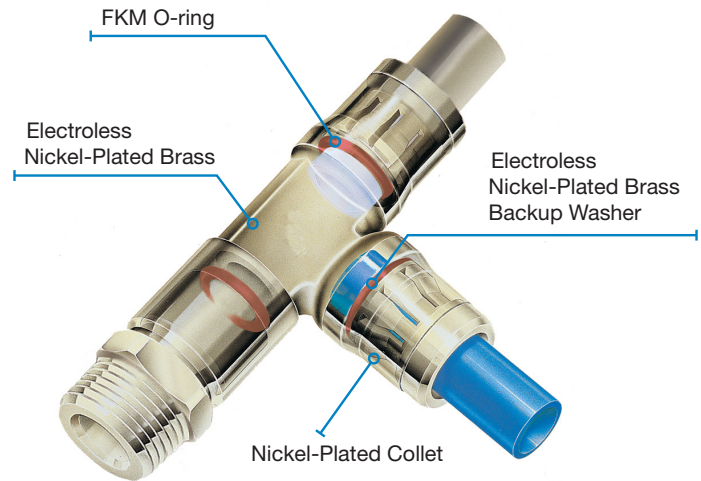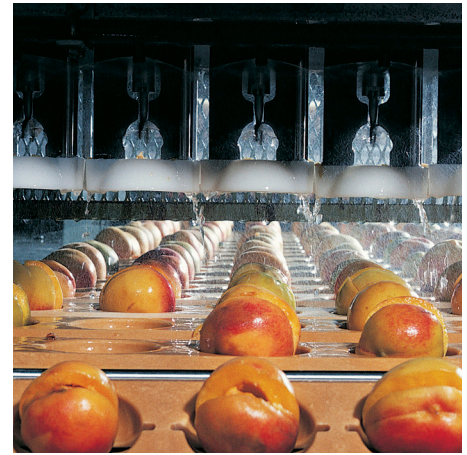

Contact Information:

Parker Hannifin Corporation
Fluid System Connectors Division
 300 Parker Dr.
 Otsego, MI 49078

phone 269-692-6555
 fax 269-694-4614
 email fscsales@parker.com

www.parker.com
 http://water.parker.com



How to Order PRESTOLOK® PLM, Metal

INCHES PRESTOLOK® PLM

W 3 69 PLP BJ -4 -2
 A B C D E F G

A Thread Sealant

W White Acrylic
 VS Vibra Seal
 Blank No Sealant

B Body Material

1 Metal Forging
 3 Composite

C Fitting Configuration

62 Union Y
 66 Female Connector
 68 Male Connector
 70 Female Elbow
 64 Union Tee
 65 Union Elbow
 69 Male Elbow
 71 Male Run Tee
 72 Male Branch Tee
 47 Cross
 79 45° Elbow
 22 Barbed Connector
 32 Union
 24 Multiple Tee
 67 Tube Reducer
 639 Plug

D Fitting Series

PLP Prestolok Plus &
 Prestolok Composite
 PLM Prestolok All Metal
 PLS Prestolok Stainless
 Steel

E Fitting Description

X Extended Male Elbow
 SP Standpipe
 PD Double Y
 BJ Banjo
 TJ Twin Banjo
 DJ Double Banjo
 BH Bulkhead Union
 DSP Plug-in Multiple Y
 RC Rail Connector
 DRC Double Rail Connector
 BHP Plug-in Bulkhead

METRIC PRESTOLOK® PLM

W 3 69 PLP X 6M 2 R
 A B C D E F G H

F Tube Size

Inches	Metric
2	4M 4mm
3	6M 6mm
5/32	8M 8mm
4	10M 10mm
5	5/16 12M 12mm
6	3/8 14M 14mm
8	1/2

H Thread Type

Metric
 R BSPT
 G BSPP

G Thread Size

Inches	Metric
0	10-32 2 1/8
1	1/16 4 1/4
2	1/8 6 3/8
4	1/4 8 1/2
6	3/8 M3 M3X0.5
8	1/2 M5 M5X0.8
	M7 M7X1
	M10 M10X1
	M12 M12X1.5

ENGINEERING YOUR SUCCESS.

Prestolok™ PLM

Push-to-connect Fittings

68PLM Male Connector
Inch Tube to NPT/UNF



68PLM Male Connector
Metric Tube to BSPT



68PLM Male Connector Tube
to UNF, BSPP or Metric



66PLM Female Connector
Metric Tube to BSPP or M5



68PLMSP Male Stud
Standpipe Metric Tube
to BSPT



68PLMSP Male
Standpipe Metric
Tube to BSPT



169PLM Male Elbow
Inch Tube to NPT, UNF



169PLM Male Elbow
Metric Tube to BSPT



169PLM Male Elbow
Tube to BSPP, Metric



169PLMX Extended Male
Elbow Metric Tube to BSPT



169PLMX Extended Male
Elbow Metric Tube to BSPP
or M5



171PLM Male Run Tee
Inch Tube to Tube to
NPT, UNF



171PLM Male Run Tee
Metric Tube To Tube
to BSPT



171PLM Male Run Tee
Tube To Tube to BSPP
or M5



172PLM Male Branch Tee
Inch Tube to NPT to tube



172PLM Male Branch Tee
Metric Tube to BSPT



171PLM Male Run Tee
Metric Tube To Tube
to BSPT



171PLM Male Run Tee
Tube To Tube to BSPP
or M5



172PLM Male Branch Tee
Inch Tube to NPT to tube



172PLM Male Branch Tee
Metric Tube to BSPT



172PLM Male Branch Tee
Tube to BSPP or M5



62PLM Straight Union Inch
Tube to Tube



62PLM Straight Union
Metric Tube to Tube



62PLMBH Bulkhead
Connector Inch Tube
to Tube



62PLMBH Bulkhead
Connector Metric Tube
to Tube



66PLMBH Female Bulkhead
Connector Metric Tube
to BSPP



165PLM Union Elbow
Inch Tube



165PLM Union Elbow
Metric Tube



165PLMBH Bulkhead
Elbow Metric Tube



164PLM Union Tee
Inch Tube



164PLM Union Tee
Metric Tube



67PLM Plug-In
Reducer Metric



639PLM Plug Metric



PLMC Cartridge



169PLMBJ Single Banjo
Metric Tube to BSPP or M5



62PLMSP Plug-In
Expander Metric



62PLMSP Plug-In
Expander Metric



122PLMSP Plug-In
Barbed Connector Metric



63PLM Double Male
Union Metric

