



domnick hunter

# OIL-Xplus Multi-Ported Compressed Air Filter

The NEW domnick hunter multi-ported filter is designed to provide continuous protection from unwanted contamination in many compressed air applications.

## The Problem

At point of use, compressed air is often distributed to numerous localized applications. This can lead to a multitude of extra fittings, valves and interconnecting pipework, increasing the potential for costly air leaks. Additionally, more space and expense is required for the separate compressed air filters and associated fittings.

## The Solution

Up to four applications can be protected simultaneously, by using the NEW domnick hunter OIL-Xplus multi-ported filter.

## Benefits

- **High quality compressed air where you need it most**  
elimination of oil, water and dirt
- **Clean air distributed to up to four applications**  
two  $\frac{3}{8}$ " and two  $\frac{1}{2}$ " connections
- **Less fittings required**  
cost effective
- **Less potential leak paths**  
lower maintenance
- **Compact and space saving**  
can be installed almost anywhere
- **Energy efficient**  
maximum economy
- **Ease of installation**  
compact housing design
- **Trouble free, high performance**  
OIL-Xplus element backed with a 1 year guarantee

## Options

- **Mounting Bracket Kit**



# Technical Specifications


MPF1 Multi-ported Filter	
Maximum flow rate	60 scfm (1.70 Nm <sup>3</sup> /min) (102 Nm <sup>3</sup> /hr)
Maximum flow per port	15 scfm (0.43 Nm <sup>3</sup> /min) (25 Nm <sup>3</sup> /hr)
Maximum operating pressure	232 psi g (16 bar g)
Maximum recommended operating temperature	150°F (66°C)
Minimum recommended operating temperature	34°F (1°C)
Initial "dry" differential pressure	1.0 psi (70 m bar)
Initial "wet" differential pressure	2.0 psi (140 m bar)
Recommended filter element change	12 months or 6000 hours
Replacement element code	MPFE1
Replacement drain code	MPFD1

## Filtration Efficiency


**HIGH EFFICIENCY GENERAL PURPOSE PROTECTION**  
 Particle Removal down to 1 micron including water and oil aerosols. Maximum remaining oil aerosol content of 0.5ppm (0.6 mg/m<sup>3</sup>) at 70°F (21°C).

## Accessories

MPFMB1 Wall Bracket

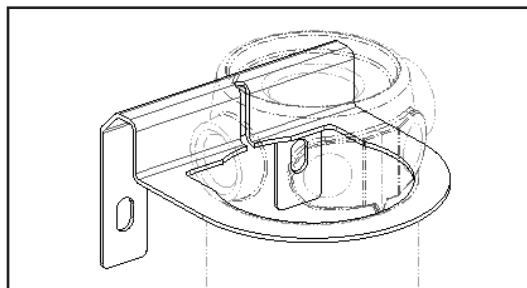

## Pipe Connections

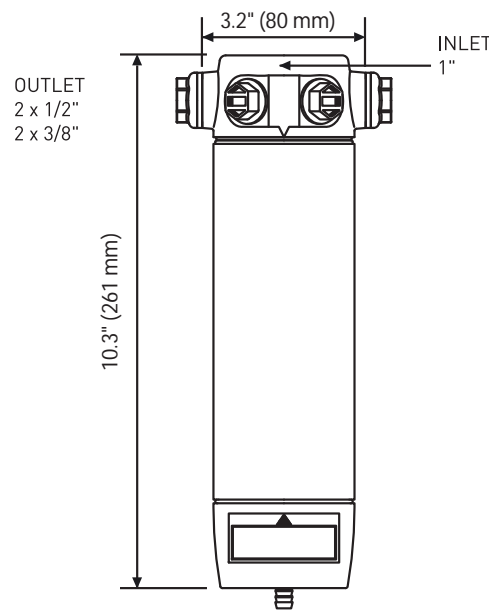

dh, domnick hunter, OIL-X and PNEUDRI are registered trademarks of domnick hunter limited.

domnick hunter limited has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Industrial Division Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the Company's standard conditions of sale.



**domnick hunter inc**  
 North Carolina, USA  
 Tel: (704) 921-9303  
 Telefax: (704) 921-1960  
 Toll Free: 1-800-345-8462

**domnick hunter Canada inc.**  
 Ontario, Canada  
 Tel: (905) 820-7146  
 Telefax: (905) 820-5463  
 Toll Free: 1-888-342-2623