


ALL DIMENSIONS ARE FOR REFERENCE ONLY. OBTAIN A CERTIFIED DRAWING FROM THE FACTORY PRIOR TO USING DIMENSIONS FOR DESIGN PURPOSES.

REV	ECO	DATE
-	0090317	1/6/2015
A	0091237	1/13/2015

### **SPECIFICATIONS:**

PART NUMBER: **PFF7695**  
 REPLACEMENT ELEMENT: **N/A**  
 SUMP VOLUME: **10oz**  
 THREAD CONNECTION: **1 1/2-16"**  
 NORMAL OPERATING PRESSURE: **100 PSIG**  
 BURST PRESSURE: **400 PSIG** (A)  
 OPERATING TEMPERATURE: **-40°F TO 250°F**  
 RATED FLOW: **UP TO 120 LBS/HR @ 50 PSIG**  
 PARTICULATE EFFICIENCY RATING: **99.99% @ 5 MICRONS**  
 COALESCING EFFICIENCY: **96.5%**  
 ASSEMBLY WEIGHT: **APPROXIMATELY 1 LB**  
 MATERIALS OF CONSTRUCTION:  
 BODY: **PAINTED CARBON STEEL, PLATED STEEL, BRASS & NITRILE GASKET**  
 ELEMENT: **RESIN IMPREGNATED GLASS FIBER, CARBON STEEL & EPOXY**

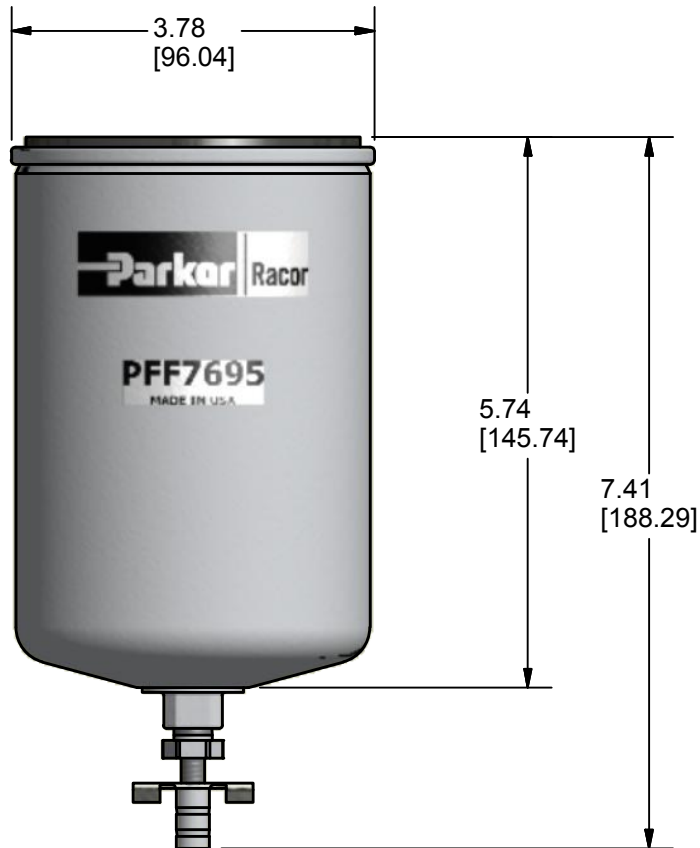

FINITE AIRTEK FILTRATION DIVISION

TITLE SPECIFICATION DRAWING

DR BY WDT

CHK BY

DATE 1/6/2015

SCALE 1:2

DRAWING No.

**PFF7695-300**

SIZE

**A**