


LIQUIfit®



Parker LIQUIfit offers the most advanced push-to-connect fitting design for water, beverage and CO2 applications.

The unique connection technology and material combination allows for a broad range of applications including higher temperatures and pressures.

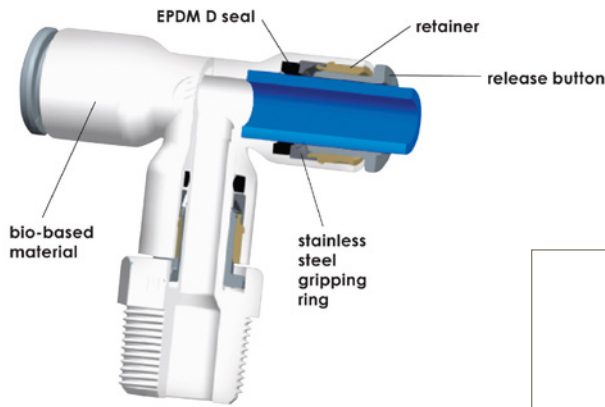

Contact Information:

Parker Hannifin Corporation
Fluid System Connectors Division
300 Parker Dr.
Otsego, MI 49078

phone 269-692-6555
fax 269-694-4614
email fscsales@parker.com

www.parker.com
<http://water.parker.com>



Product Features:

- EPDM D seal secures connection with larger surface area
- Engineered polymer allows superior mechanical strength and chemical resistance
- Full stainless gripping ring eliminates the need for locking
- Release button protects and supports tubing
- FDA compliant
- NSF 51
- NSF 61 C-Hot
- Meets safe drinking water act
- Higher pressures (230 psi Maximum)
- Higher temperature ratings (+35 - 200°F)
- Fractional inch and metric size available

ENGINEERING YOUR SUCCESS.

6302 Union Elbow



6304 Union Tee



6306 Union



6307 Cross



6315 Female Connector



6316 Bulkhead Union



6322 Tube-To-Hose-Stem



6325 Faucet-Connector



6326 Plug



6340 Union Y



6351 Cap



6366 Tube Reducer



6380 Plug-in 45 Elbow



6382 Plug-in Elbow



6383 Plug-in Run Tee



6388 Plug-in-Branch Tee



6503 Swivel Run-Tee



6505 Male Connector



6508 Swivel Branch Tee



6509 Swivel Elbow



6521 Stem Adapter



6548 Swivel Y Connector



6579 Fixed Elbow



A full range of LIQUIfit ball valves are available. For specifications and configurations please consult master catalog 3501E.



LFPP VAS
Angle Stop

LFPP VME
with Clip



LFPP VUCPB
Barbed x Tube