

Datasheet - BNS-B20-12zG-ST-R

Safety sensors / BNS-B20

 Preferred typ

(Minor differences between the printed image and the original product may exist!)

- thermoplastic enclosure
- Non-contact safety switch
- Does not protrude into the door opening
- 119,5 mm x 140 mm x 43,3 mm
- Substitutes door-handle and safety switch, no further door fittings required
- Modern and symmetric design
- Tamper-proof because of integral coded safety sensor
- Ergonomic operation
- Suitable for hinged and sliding guards
- No protruding actuator
- Simple mounting with 4 Screws
- Connector M12 x 1, 8-pole

Ordering details

Product type description	BNS-B20-12ZG-ST-R
Article number	101177734
EAN code	4030661309194

Approval

Approval




Classification

Standards	EN ISO 13849-1
B _{10d} Opener/Normally open contact (NC/NO)	25.000.000
- notice	at max. 20% contact load
Mission time	20 Years
notice	$MTTF_d = \frac{B_{10d}}{0,1 \times n_{op}}$ $n_{op} = \frac{d_{op} \times h_{op} \times 3600 \text{ s/h}}{t_{cycle}}$

Global Properties

Product name	BNS-B20
--------------	---------

Standards	IEC 60947-5-3, BG-GS-ET-14
Compliance with the Directives (Y/N) 	Yes
Materials	
- Material of the housings	Plastic, glass-fibre reinforced thermoplastic
Weight	115 g
Coding available (Y/N)	Yes
Monitoring function of downstream devices (Y/N)	No
Prerequisite evaluation unit	
Recommended safety-monitoring module	
Recommended actuator	BNS-B20-B01

Mechanical data

Design of electrical connection	Connector M12
AWG-Number	
mechanical installation conditions	quasi-flush
Ensured switch distance ON	0 mm
Ensured switch distance OFF	22 mm
Type of actuation	Magnet
restistance to shock	30 g / 11 ms
Resistance to vibration	10 ... 55 Hz, Amplitude 1 mm
Latching force	100 N
Door hinge	right
Max. door weight	
- sliding guard	3 kg
- hinged guard	5 kg

Ambient conditions

Ambient temperature	
- Min. environmental temperature	-25 °C
- Max. environmental temperature	+70 °C
Storage and transport temperature	
- Min. Storage and transport temperature	-25 °C
- Max. Storage and transport temperature	+70 °C
Protection class	IP67

Electrical data

Integrated Safety monitoring module available (Y/N)	No
Cross circuit/short circuit recognition possible (Y/N)	Yes
Voltage type	VDC
Switch frequency	max. 5 Hz
Switching voltage	max. 24 VDC
Switching current	max. 10 mA
Switching capacity	max. 240 mW

Outputs

Design of control output	
Number of shutters	1 piece
Number of openers	2 piece
Design of output signal switching device	

Electrical data - Safety outputs

Number of secure semi-conductor outputs	0 piece
Number of secure outputs with contact	2 piece

Electrical data - Diagnostic output

Number of semi-conductor outputs with signaling function	0 piece
Number of outputs with signaling function that already have a contact	1 piece

LED switching conditions display

LED switching conditions display (Y/N)	Yes
- The LED is illuminated when the guard is closed.	

ATEX

Explosion protection categories for gases	None
Explosion protected category for dusts	None

Dimensions

Dimensions of the sensor	
- Width of sensor	119.5 mm
- Height of sensor	140 mm
- Length of sensor	43.3 mm


notice

Contact symbols shown for the closed condition of the guard device.
 The contact configuration for versions with or without LED is identical.
 Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.
 Contact S21-S22 must be integrated in the safety circuit

Included in delivery

Actuators must be ordered separately.

Diagram

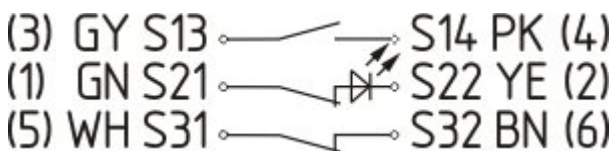

Note Diagram

- positive break NC contact
- active
- no active
- Normally-open contact
- Normally-closed contact

Ordering code

BNS-B20-(1)Z(2)-(3)-(4)

(1)

12	1 Normally open contact (NO) / 2 Opener (NC)
11	1 Normally open contact (NO) / 1 Opener (NC)
02	2 Opener (NC)

(2)

without	without LED switching conditions display
G	with LED switching conditions display

(3)

without	with Pre-wired cable bottom
H	with Pre-wired cable rear
ST	with Connector M12 bottom

(4)

L	Door hinge on left-hand side (<i>Only for Pre-wired cable bottom or Plug-in connection</i>)
R	Door hinge on right-hand side (<i>Only for Pre-wired cable bottom or Plug-in connection</i>)

Documents

Operating instructions and Declaration of conformity (pt) 535 kB, 06.07.2012

Code: mrl_bns-b20_pt

Operating instructions and Declaration of conformity (es) 513 kB, 11.08.2011

Code: mrl_bns-b20_es

Operating instructions and Declaration of conformity (it) 496 kB, 13.09.2011

Code: mrl_bns-b20_it

Operating instructions and Declaration of conformity (en) 659 kB, 16.08.2011

Code: mrl_bns-b20_en

Operating instructions and Declaration of conformity (pl) 497 kB, 30.07.2013

Code: mrl_bns-b20_pl

Operating instructions and Declaration of conformity (de) 576 kB, 16.08.2011

Code: mrl_bns-b20_de

Operating instructions and Declaration of conformity (jp) 663 kB, 10.11.2011

Code: mrl_bns-b20_jp

Operating instructions and Declaration of conformity (fr) 497 kB, 13.09.2011

Code: mrl_bns-b20_fr

Operating instructions and Declaration of conformity (nl) 520 kB, 19.08.2011

Code: mrl_bns-b20_nl

Operating instructions and Declaration of conformity (da) 513 kB, 23.08.2012

Code: mrl_bns-b20_da

BG-test certificate (en) 643 kB, 27.02.2007

Code: z_bnbp02

BG-test certificate (de) 648 kB, 27.02.2007

Code: z_bnbsp01

Brochure (fr) 337 kB, 08.10.2004

Code: b_b20p03

Brochure (en) 290 kB, 07.10.2004

Code: b_b20p02

Brochure (de) 296 kB, 07.10.2004

Code: b_b20p01

Brochure (it) 297 kB, 07.10.2004

Code: b_b20p05


notice (de, en) 60 kB, 21.03.2006

Code: s_b20p01


Images




Product photo

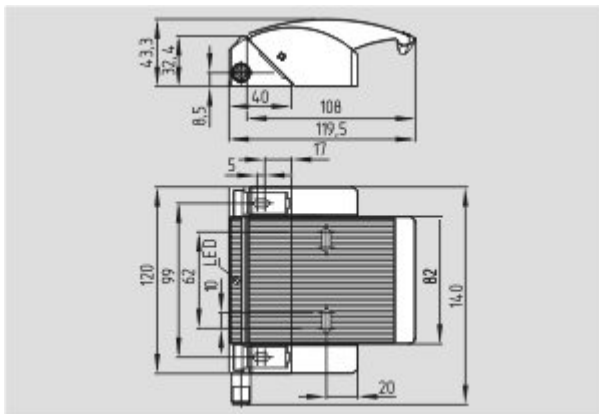

Dimensional drawing (basic component)



Contact arrangement

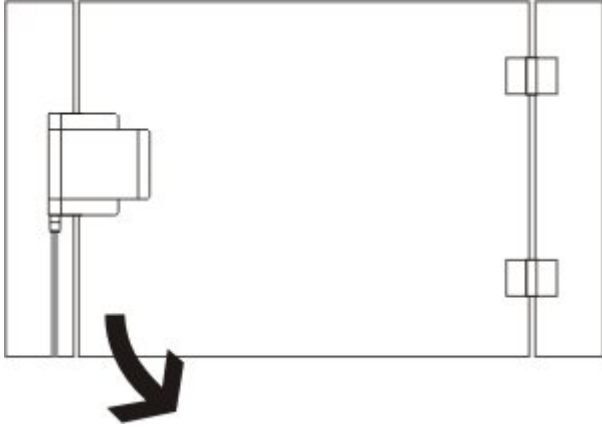

Clipart

System components

Actuator



101177737 - BNS-B20-B01

Connector



A-K8M12

- Pre-wired cable
- 8-pole

K.A. Schmersal GmbH & Co. KG, Mödinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 20.08.2014 - 20:48:50h Kasbase 2.2.18.F DBI

Image

Image
et=sS