

General Description

Series D1FB (NG6) proportional directional valves are available with and without onboard electronics (OBE).

D1FB OBE:

The digital onboard electronics is situated in a robust metal housing, which allows the usage under rough environmental conditions.

The nominal values are factory set. The cable connection to a serial RS232 interface is available as an accessory.

D1FB for external electronics:

The parameters can be saved, changed and duplicated in combination with the digital power amplifier PWD00A-400.

The valve parameters can be edited with the common ProPxD software for both versions.

Series D1FB valves can be ordered with spool/sleeve design (D1FB*0) for maximum precision, as well as spool/body design (D1FB*3) for high nominal flow - see functional limit curves for maximum flow capability.

Features


- Spool/sleeve and spool/body.
- 3 command options for D1FB OBE:
 +/- 10V, 4...20mA, +/- 20mA
- High repeatability from valve to valve.




D1FB



D1FB OBE



D1FB




D1FB OBE

- Low hysteresis.
- Manual override.
- Digital onboard electronics.


D1FB*0 OBE

Spool/Sleeve Design

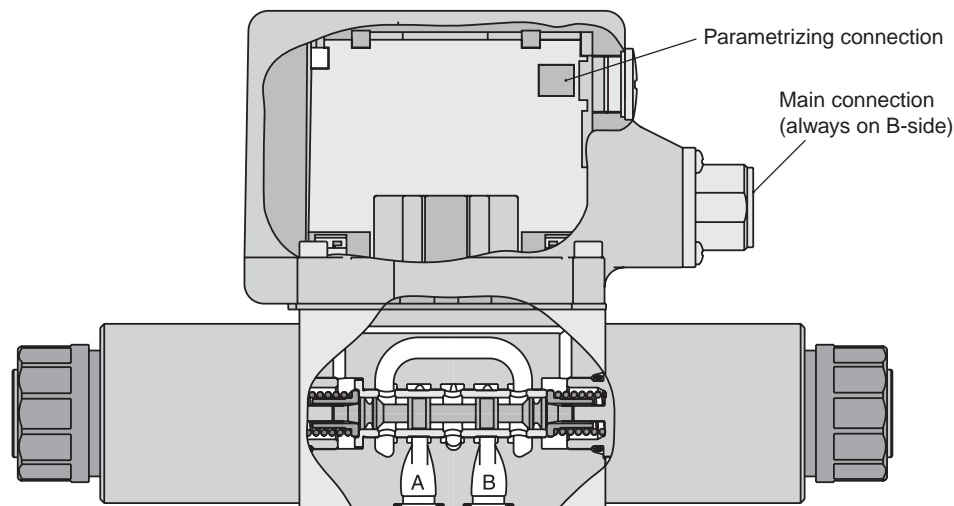


D1FB*3 OBE

Spool/Body Design



A

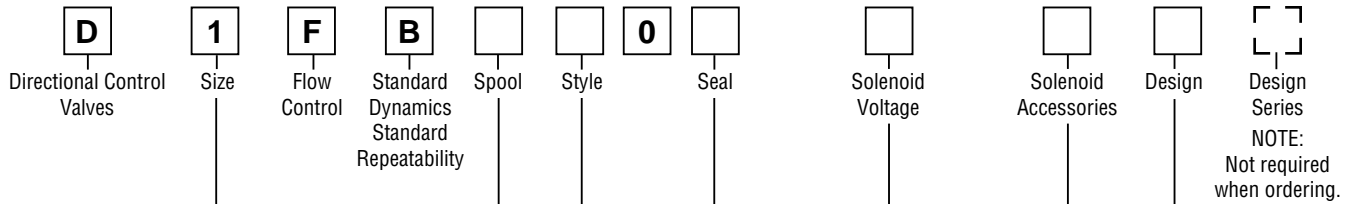

Code	Description
1	DIN NG6 CETOP 3 NFPA D03

D1FB*0: Spool/Sleeve Design	
Code	Solenoid
M	9V/2.7A
J	24V/0.8A

Code	Description
0	Spool/sleeve design
3	Spool/body design

D1FB*3: Spool/Body Design	
Code	Solenoid
K	12V / 2.2A
J	24V / 1.1A

Code	Description
N	Nitrile
V	Fluorocarbon

Code	Description
W*	Connector as per DIN 43650 without plug
J*	Connector DT04-2P "Deutsch"

* Please order plugs separately. See Accessories.

D1FB*0: Spool/Sleeve Design		
Overlap		
Code	Spool	Flow LPM (GPM) at Δp 5 Bar (72.5 PSI) per metering edge
E01H		20 (5.3)
E01F		12 (3.2)
E01C		6 (1.6)
E02H		20 (5.3)
E02F		12 (3.2)
E02C		6 (1.6)
E03H		20 (5.3)
E03F		12 (3.2)
E03C		6 (1.6)
B31H	$Q_b = Q_a / 2$ 	20/10 (5.3/2.6)
B31F		12/6 (3.2/1.6)
B32H	$Q_b = Q_a / 2$ 	20/10 (5.3/2.6)
B32F		12/6 (3.2/1.6)

Code	Style
C	
E	
K	

D1FB*3: Spool/Body Design		
Overlap		
Code	Spool	Flow LPM (GPM) at Δp 5 Bar (72.5 PSI) per metering edge
E01K		30 (7.9)
E01H		20 (5.3)
E01F		10 (2.6)
E02K		30 (7.9)
E02H		20 (5.3)
E02F		10 (2.6)


¹⁾ Only for style C.
 No defined spool positioning at power down.

Bolt Kit:

- BK209 (4) 10-24x1.25 SHCS
- BK375 (4) M5x30

Weight:

D1FB 2.2 kg (4.9 lbs.)

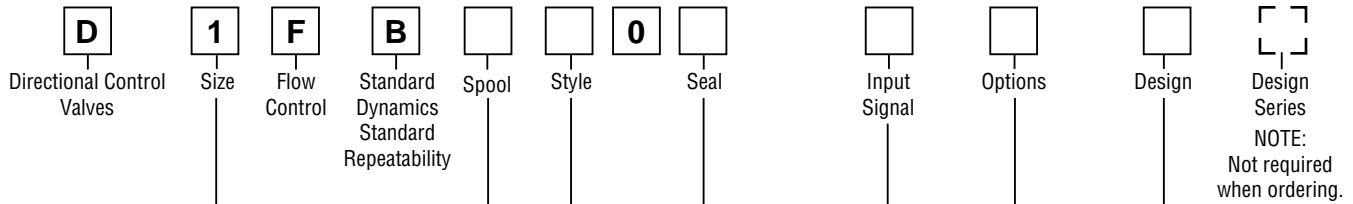

Code	Description
1	DIN NG6 CETOP 3 NFFPA D03

Code	Description
0	Spool/sleeve design
3	Spool/body design

D1FB*0: Spool/Sleeve Design		
Overlap		
Code	Spool	Flow LPM (GPM) at Δp 5 Bar (72.5 PSI) per metering edge
E01H E01F E01C		20 (5.3) 12 (3.2) 6 (1.6)
E02H E02F E02C		20 (5.3) 12 (3.2) 6 (1.6)
E03H E03F E03C		20 (5.3) 12 (3.2) 6 (1.6)
B31H B31F	$Q_b = Q_a / 2$ 	20/10 (5.3/2.6) 12/6 (3.2/1.6)
B32H B32F	$Q_b = Q_a / 2$ 	20/10 (5.3/2.6) 12/6 (3.2/1.6)

Code	Input signal ¹⁾	Function	Port	Options
F0	0...+/-10V	0...+10V > P-A	6 + PE	Potentiometer supply
G0	0...+/-20mA	0...+20mA > P-A	6 + PE	—
S0	4...20mA	12...20mA > P-A	6 + PE	—
W5 ²⁾	0...+/-10V 4...20mA	0...+10V > P-A 12...20mA > P-A	11 + PE	Potentiometer supply & command preset channel

¹⁾ Single solenoid always 0...+10V respectively 4...20 mA
²⁾ Factory set \pm 10V on delivery

Code	Description
N	Nitrile
V	Fluorocarbon

D1FB*3: Spool/Body Design		
Overlap		
Code	Spool	Flow LPM (GPM) at Δp 5 Bar (72.5 PSI) per metering edge
E01K E01H E01F		30 (7.9) 20 (5.3) 10 (2.6)
E02K E02H E02F		30 (7.9) 20 (5.3) 10 (2.6)

Code	Style
C	
E	
K	

¹⁾ Only for style C.
 No defined spool positioning at power down.

Bolt Kit:

- BK209 (4) 10-24x1.25 SHCS
- BK375 (4) M5x30

Weight:

D1FB 2.5 kg (5.5 lbs.)

Please order plugs separately. See Accessories.

Parametrizing cable OBE => RS232
 Item no. 40982923

A

General			
Design	Direct operated proportional DC valve		
Actuation	Proportional solenoid		
Size	NG6 / CETOP 3 / NFPA D03		
Mounting Interface	DIN 24340 / ISO 4401 / CETOP RP121 / NFPA		
Mounting Position	Unrestricted		
Ambient Temperature	[°C]	-20...+60; (-4°F...+140°F)	
MTTF _D Value (OBE)	[years]	150 (75)	
Vibration Resistance	[g]	10 Sinus 5...2000 Hz acc. IEC 68-2-6 30 Random noise 20...2000 Hz acc. IEC 68-2-36 15 Shock acc. IEC 68-2-27	
Hydraulic			
Maximum Operating Pressure	Ports P, A, B 350 Bar (5075 PSI); Port T 210 Bar (3045 PSI)		
Maximum Pressure Drop PABT / PBAT	350 Bar (5075 PSI)		
Fluid	Hydraulic oil as per DIN 51524...535, other on request		
Fluid Temperature	[°C]	-20...+60; (-4°F...+140°F)	
Viscosity Permitted	[cSt] / [mm ² /s]	20...380 (93...1761 SSU)	
Recommended	[cSt] / [mm ² /s]	30...80 (139...371 SSU)	
Filtration	ISO 4406 (1999) 18/16/13 (acc. NAS 1638: 7)		
Nominal Flow at Δp= 5 Bar (72.5 PSI) per Control Edge *	D1FB*0 (Spool/sleeve)		D1FB*3 (Spool/body)
	6 LPM (1.6 GPM) / 12 LPM (3.2 GPM) / 20 LPM (5.3 GPM)		10 LPM (2.6 GPM) / 20 LPM (5.3 GPM) / 30 LPM (7.9 GPM)
Leakage at 100 Bar (1450 PSI)	[ml/min]	<50 (overlap spool) <400 (zerolap spool)	<60
Overlap	[%]	25, electrically normalized at 10 (see flow characteristics)	
Static / Dynamic			
Step Response at 100% Step	[ms]	30	30
Hysteresis	[%]	<4	<6
Temperature Drift Solenoid Current	[%/K]	<0.02	
Electrical			
Duty Ratio	[%]	100	
Protection Class	Standard (as per EN175301-803) IP65 in accordance with EN60529 (plugged and mounted) DT04-2P "Deutsch" IP69K (plugged and mounted)		
Solenoid		Code "M"	Code "K" Code "J" (Spool/sleeve)
Supply Voltage	[V]	9	12 24
Current Consumption	[A]	2.7	2.2 0.8 (1.1)
Resistance	[Ohm]	2.7	4.4 18.6
Coil Insulation Class	F (155 °C); (331 °F)		
Solenoid Connection	Connector as per EN 175301-803 (code W), DT04-2P "Deutsch" connector (code J). Solenoid identification as per ISO 9461.		
Wiring Minimum	[mm ²]	3x1.5 (AWG 16) overall braid shield (Code W), "Deutsch" connector DP4 2-Pin (Code J)	
Wiring Length Maximum	[m]	50 (164 ft.)	

* Flow rate for different Δp per control edge: $Q_x = Q_{Nom.} \cdot \sqrt{\frac{\Delta p_x}{\Delta p_{Nom.}}}$

Continued on the next page



Specifications

Series D1FB

Electrical		
Duty Ratio	[%]	100
Protection Class		IP65 in accordance with EN 60529 (plugged and mounted)
Supply Voltage/ripple DC	[V]	18...30, ripple < 5% eff., surge free
Current Consumption Maximum	[A]	2.0
Pre-fusing Medium Lag	[A]	2.5
Input Signal		
Codes F0 & W5 Voltage	[V]	+10...0...-10, ripple < 0.01 % eff., surge free, Ri = 100kOhm, 0...+10V => P -> A
Codes S0 & W5 Current	[mA]	4...12...20, ripple < 0.01 % eff., surge free, Ri = 200Ohm, 12...20mA => P -> A < 3.6 mA = enable off, > 3.8 mA = enable on (acc. to NAMUR NE43)
Code G0	[mA]	+20...0...-20, ripple < 0.01 % eff., surge free, Ri = 200Ohm, 0...+20mA => P -> A
Differential input max.		
Codes F0, G0 & S0	[V]	30 for terminal D and E against PE (terminal G) 11 for terminal D and E against 0V (terminal B)
Code W5	[V]	30 for terminal 4 and 5 against PE (terminal PE) 11 for terminal 4 and 5 against 0V (terminal 2)
Channel Recall Signal	[V]	0...2.5: off / 5...30: on / Ri = 100 kOhm
Adjustment Ranges:		
Min	[%]	0...50
Max	[%]	50...100
Ramp	[s]	0...32.5
Interface		RS 232, parametrizing connection 5 pole
EMC		EN 61000-6-2, EN 61000-6-4
Central Connection		
Codes F0, G0 & S0		6 + PE acc. to EN 175201-804
Code W5		11 + PE acc. to EN 175201-804
Wiring Minimum		
Codes F0, G0 & S0	[mm ²]	7 x 1.0 (AWG16) overall braid shield
Code W5	[mm ²]	11 x 1.0 (AWG20) overall braid shield
Wiring Length Maximum	[m]	50 (164 ft.)

A



D1FB*0 Flow

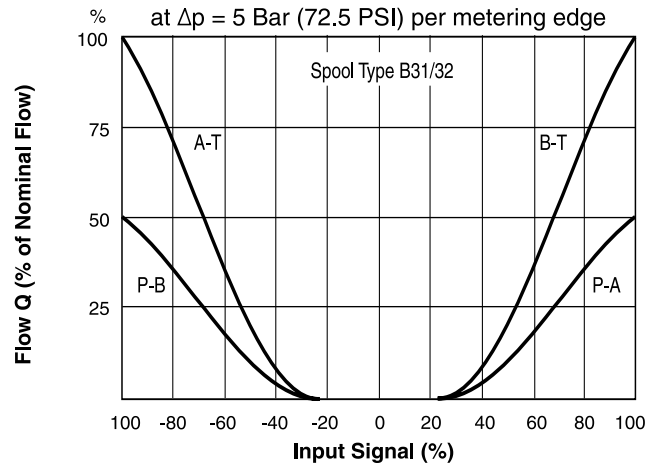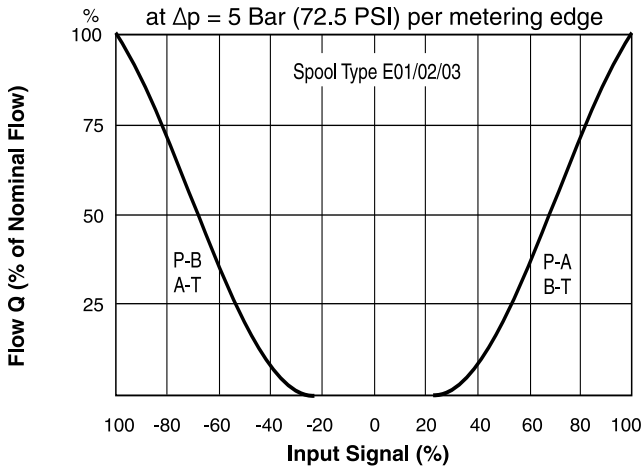

All performance curves measured with HLP46 at 50°C (122°F).


D1FB*0 OBE Flow

(Electrically set to opening point 10%)

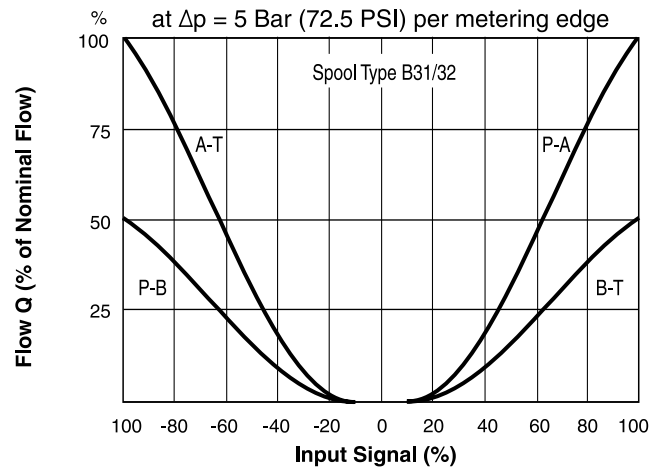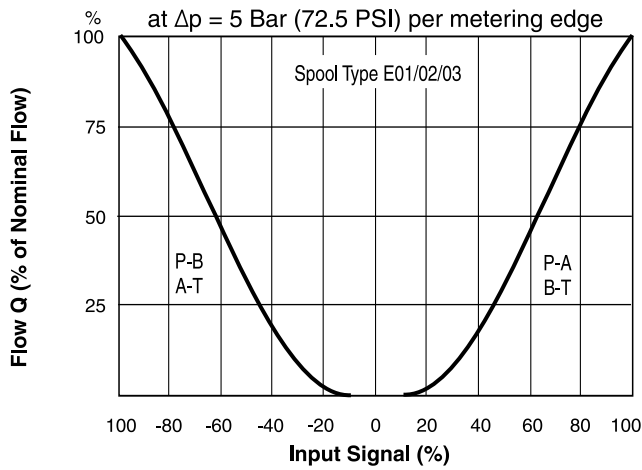


All performance curves measured with HLP46 at 50°C (122°F).

D1FB*3 Flow

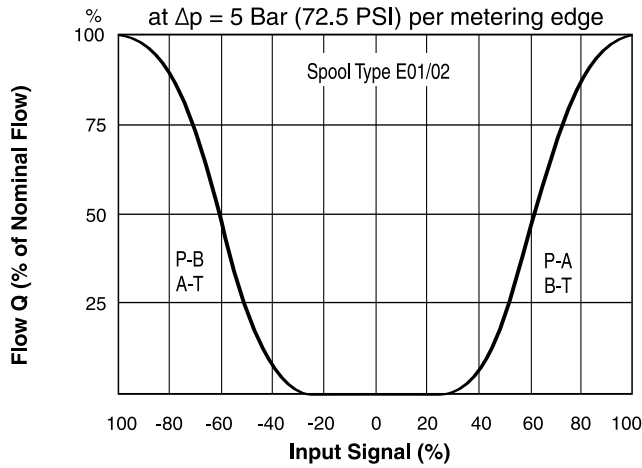

D1FB*3 OBE Flow



(Electrically set to opening point 10%)

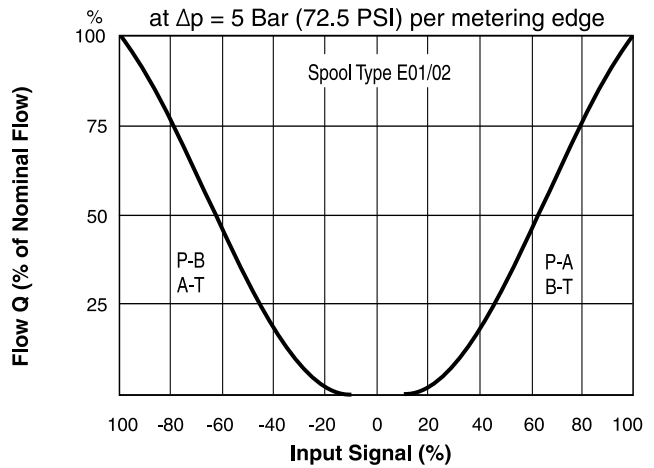

All performance curves measured with HLP46 at 50°C (122°F).

Functional Limits

At 25%, 50%, 75% and 100% command signal (symmetric flow). At asymmetric flow a reduced flow limit has to be considered – typically approx. 10% lower.

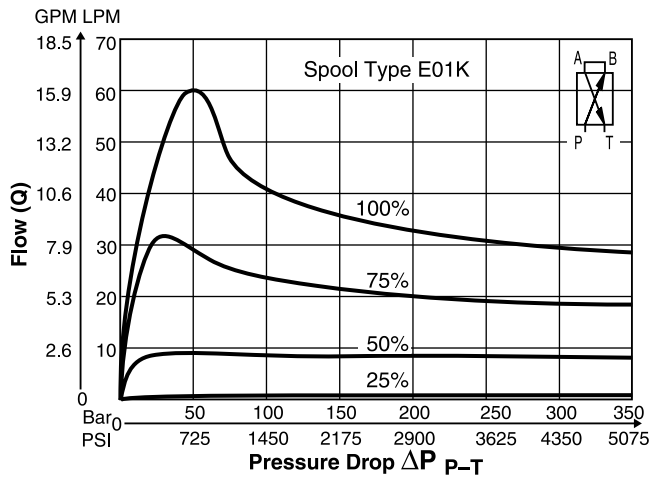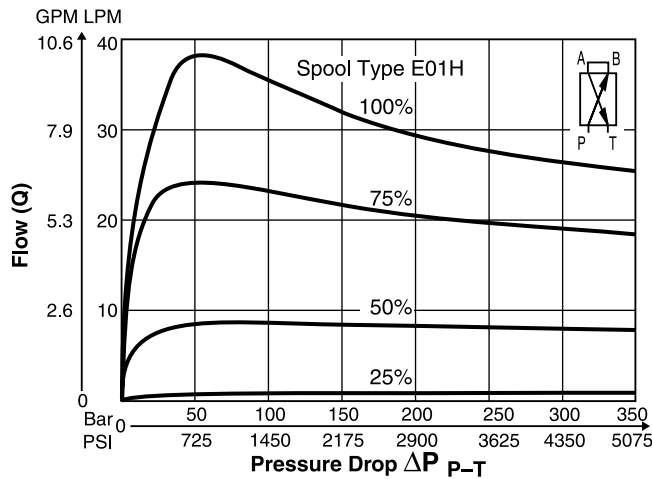


All performance curves measured with HLP46 at 50°C (122°F).

A


Code F0

6 + PE acc. to EN 175201-804

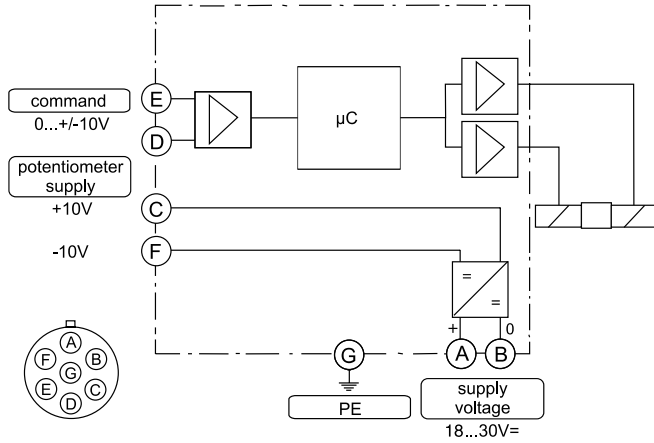


Code G0, S0

6 + PE acc. to EN 175201-804

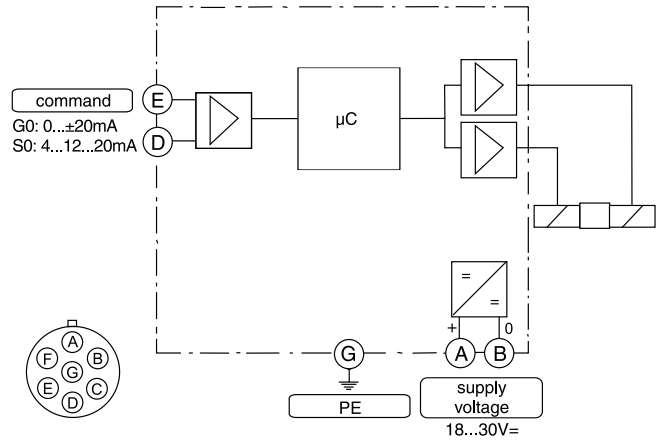

Code W5

11 + PE acc. to EN 175201-804

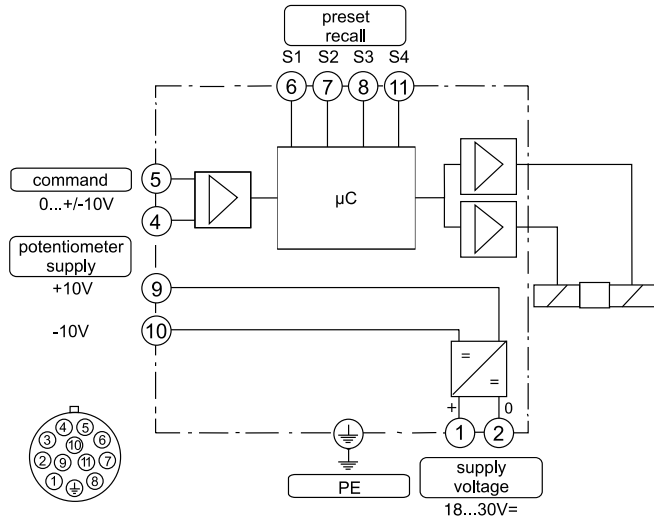


ProPxD Interface Program

The ProPxD software permits comfortable parameter setting for the module electronics. Via the clearly arranged entry mask the parameters can be noticed and modified. Storage of complete parameter sets is possible as well as printout or record as a text file for further documentation. Stored parameter sets may be loaded anytime and transmitted to other valves. Inside the electronics a nonvolatile memory stores the data with the option for recalling or modification.

Features

- Simple editing of all parameters.
- Storage and loading of optimized parameter adjustments.
- Executable with all Windows® operating systems from Windows® 95 upwards.
- Communication between PC and electronics via serial interface RS-232.
- Simple to use PC user software, free of charge: www.parker.com/euro_hcd – see "Software Downloads"

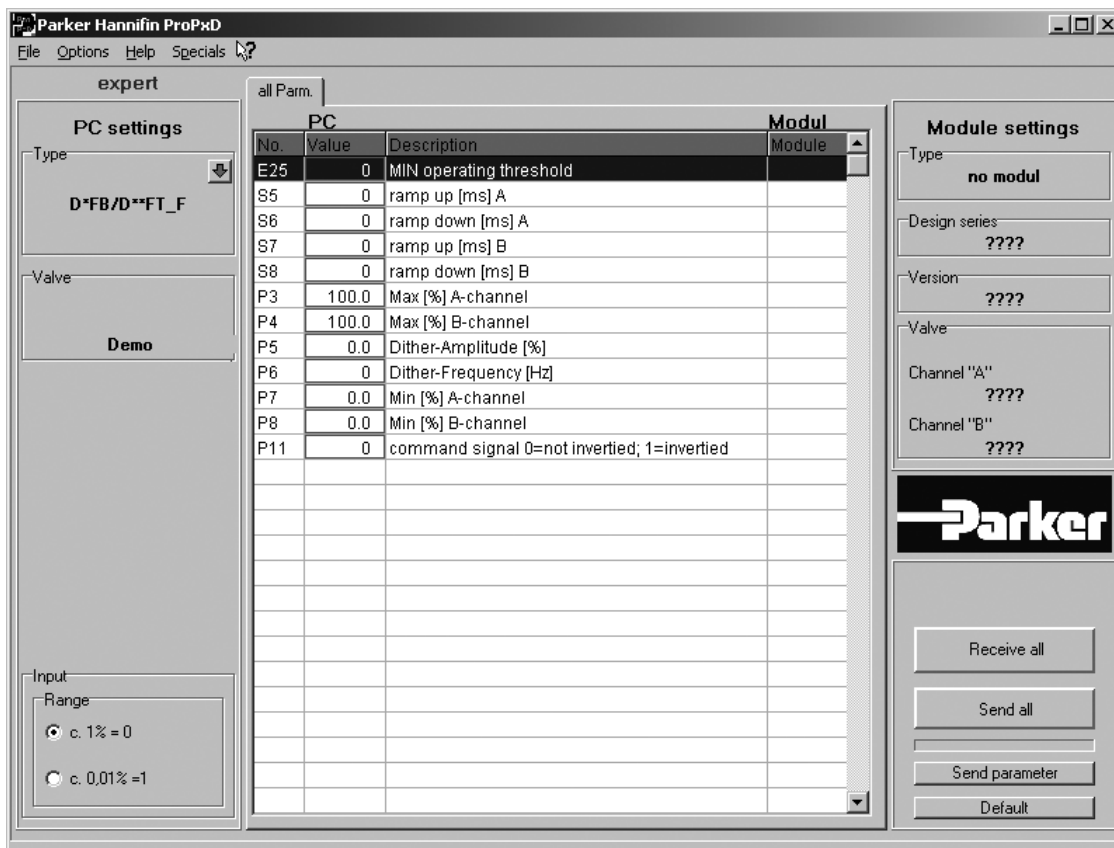

The parametrizing cable may be ordered under item no. 40982923.


Dimensions

Series D1FB


Inch equivalents for millimeter dimensions are shown in (**)

A

D1FB*C

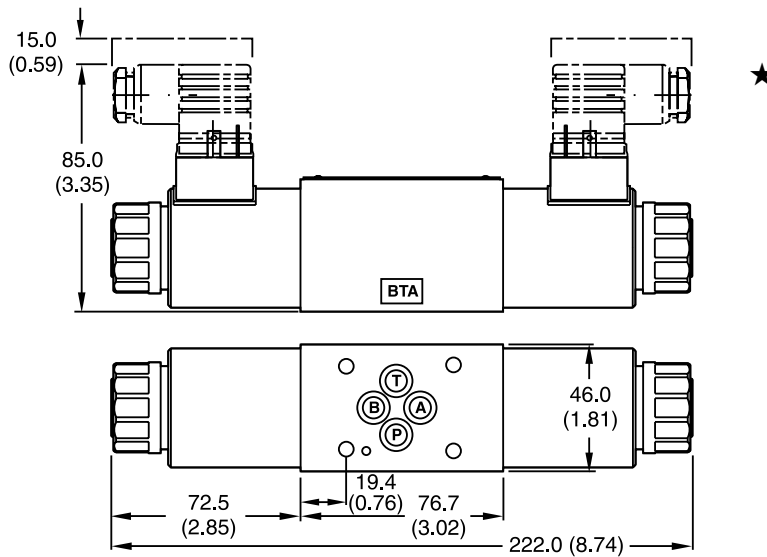


D1FB*K

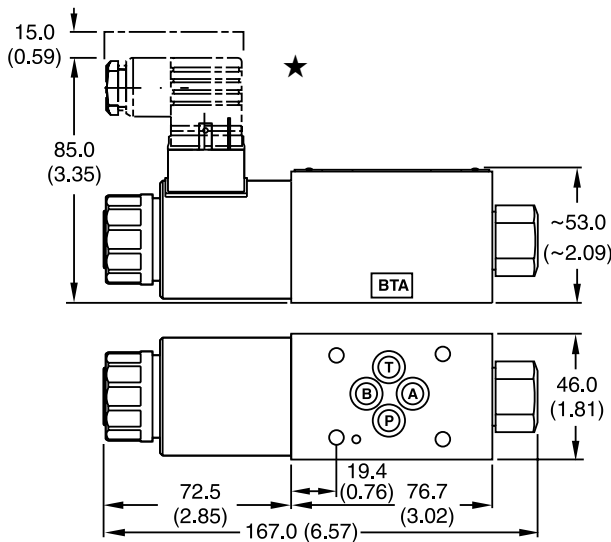

★ Order plugs separately.

**Dimensions with DT04-2P
"Deutsch" Connector
(Only C style shown)
D1FB*C**

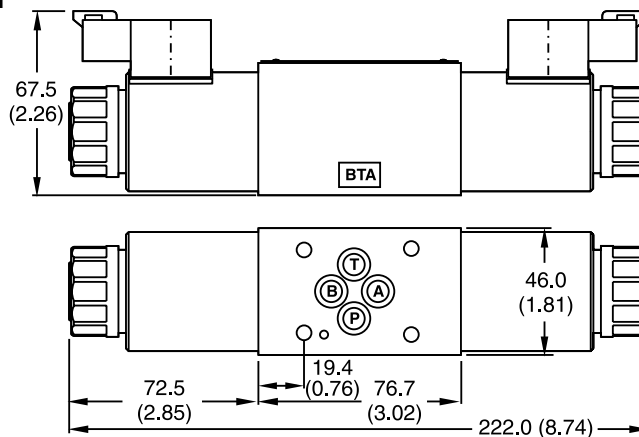

Surface Finish	Kit	Kit	Kit	Seal Kit
	BK375 BK209	4x M5x30 DIN 912 12.9 4x 10-24x1.25	7.6 Nm (5.6 lb.-ft.) ±15 %	Nitrile: SK-D1FB Fluorocarbon: SK-D1FBV


D1FB.indd, dd

Dimensions



Series D1FB






Inch equivalents for millimeter dimensions are shown in (**)

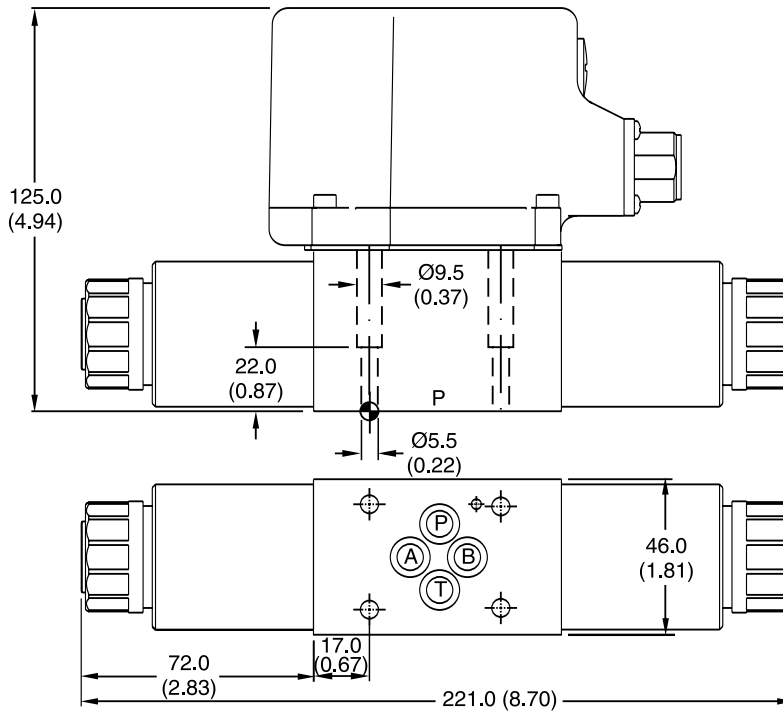D1FB*C OBE

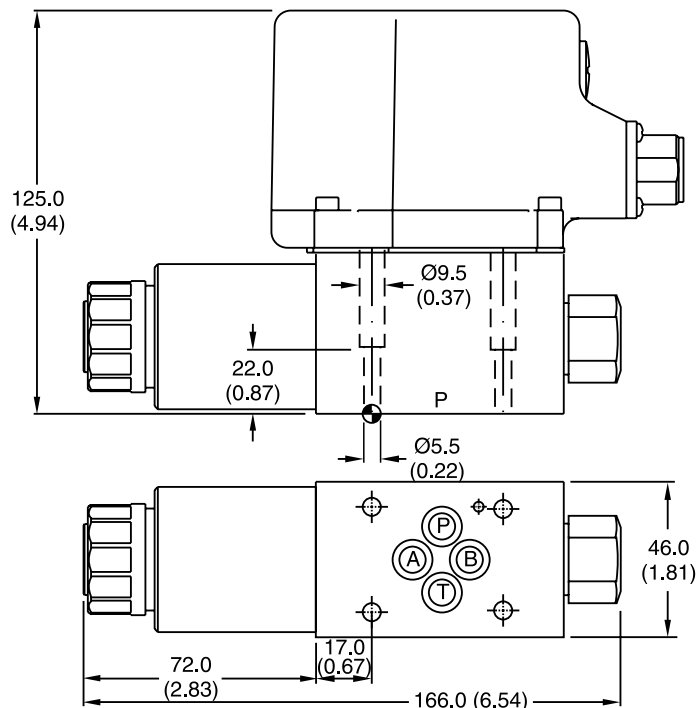

D1FB*E OBE



Surface Finish	 Kit	 Kit	 Kit	Seal  Kit
	BK375 BK209	4x M5x30 DIN 912 12.9 4x 10-24x1.25	7.6 Nm (5.6 lb.-ft.) ±15 %	Nitrile: SK-D1FB Fluorocarbon: SK-D1FBV

D1FB.indd, dd

