

High Flow Direct Mount Namur Solenoid Valves


For control of pneumatic actuators

1/4" & 1/2" NPT valves for 3/2, 5/2 or 5/3 operation

Parker Fluid Control Division is continually expanding its Valve Actuation product portfolio to meet the ever increasing demands of the process industry.

The addition of the High Flow direct mount NAMUR solenoid valves for the Process and Industrial markets complements our highly successful specification grade 7300 Series product line. This product line provides new, cost effective solutions for general purpose customer application needs.

The 1/4" NPT valve with conversion plate for 3/2 or 5/2, operation simplifies ordering, reduces inventory levels and allows for faster delivery.

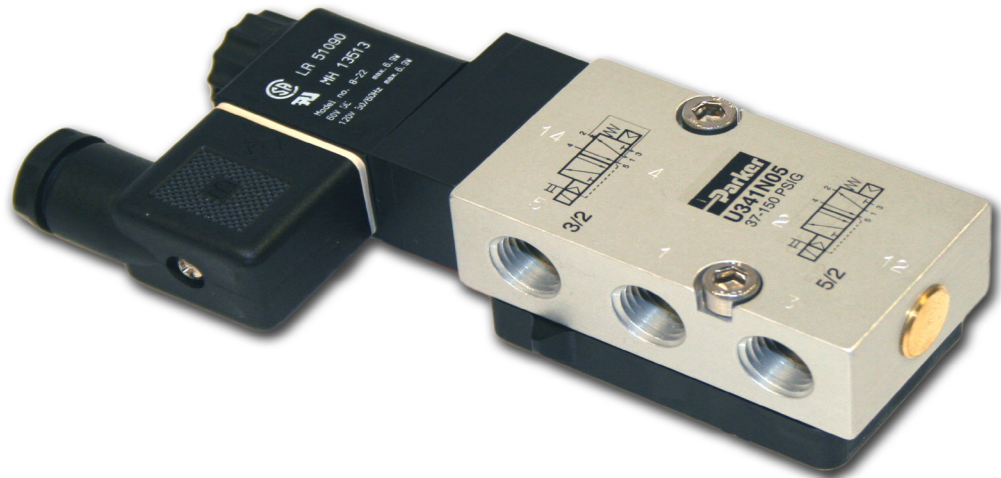

Contact Information

Parker Hannifin Corporation
Fluid Control Division
95 Edgewood Avenue
New Britain, CT 06051

phone 860 827 2300
fax 860 827 2384

www.parker.com/fcd

Applications

- Water & Sewage
- Pulp & Paper
- Food & Beverage
- Pharmaceutical
- Powder Dosing Machines
- Powder Transportation
- Process Industry

Benefits

- Compact Design
- High flow Rates up to 3.0 Cv
- Fail Safe Operation
- Outdoor Use
- Long Life Expectancy
- FM & CSA Approvals
- Reduced inventory



ENGINEERING YOUR SUCCESS.

Technical Specifications:

Media: Dry or Lubricated Air

Minimum Ambient Temp: 14°F (-10°C)

Maximum Ambient Temp: 122°F (+50°C)

Body: Aluminum

Seal: FKM

Manual Override: Locking Manual Override Standard

Port Size NPT	Orifice Size in.	Flow Factor Cv	Operating Pressure Differential (MOPD)		Wattage	Function	Solenoid	Min. Fluid Temp. °F	Max. Fluid Temp. °F	Pressure Vessel Number
			Minimum PSI	AC/DC Rating PSI						
1/4	.27	1.2	37	150	5 W	3/2	Single	32°F	122°F	U331N03
1/4	.27	1.2	37	150	5 W	5/2	Single	32°F	122°F	U341N03
1/4	.27	1.2	37	150	5 W	3/2, 5/2	Single	32°F	122°F	U341N05
1/4	.27	1.2	30	150	5 W	5/2	Double	32°F	122°F	U347N03
1/4	.27	1.2	45	150	5 W	5/3	Double	32°F	122°F	U342N03
1/2	.47	3.0	37	150	5 W	3/2	Single	32°F	122°F	U331N04
1/2	.47	3.0	37	150	5 W	5/2	Single	32°F	122°F	U341N04



Class F

Protection Class: IP65 with approved connector

Approvals: UL Component Recognized, CSA Component Certified

22mm DIN (43650B)

Voltage	Coil	* Voltage Code
12 VDC	ND1*	A
24 VDC	ND1*	B
24/60	ND1*	E
120/50-60	ND1*	F
240/50-60	ND1*	G

DIN Coil Electrical Options (Order Separately)

Option Part Number	Option
DX001	Din Form "B" Strain Relief Cable Gland Connector
DX002	Din Form "B" 1/2" NPT Conduit Plug Connector



Class H

Approvals- FM†, CSA

NEMA 7,9

FM and CSA approvals for Class 1, Group A,B,C,D and Class II, Groups E,F,G. †Meets Ex m T4 Zone 1.

Conduit - Hazardous Location Coil

Voltage	Coil Code	* Voltage Code
12 VDC	NH1*	A
24 VDC	NH1*	B
24/60	NH1*	E
120/60	NH1*	C
240/60	NH1*	D

Hazardous Location Coil Spacer Plate Kits

N60001: Spacer plate with seals and longer mounting screws (1/4" Spacer plate required for Hazardous coils on pressure vessels U331N03, U341N03, U347N03, U342N03)

N60002: Spacer plate with seals and longer mounting screws (1/2" Spacer plate required for Hazardous location coils on pressure vessels U331N04, U341N04)

How to order Complete Valves:

Valve with DIN Coil	Valve with Hazardous Location Coil
U331N03ND1*	U331N03NH1* (spacer plate included)
U341N03ND1*	U341N03NH1* (spacer plate included)
U341N05ND1*	U341N05NH1* (spacer plate not required)
U347N03ND1*	U347N03NH1* (spacer plate included)
U342N03ND1*	U342N03NH1* (spacer plate included)
U331N04ND1*	U331N04NH1* (spacer plate included)
U334N04ND1*	U334N04NH1* (spacer plate included)

*Add voltage code from the above coil charts to complete part number.